

TrackMaker

NAV38
MK2

Version 1.37
*for Windows CE.NET and
Allegro CX Field Computer*

data acquisition & navigation software
for the Geonics EM38-MK2 and GPS receiver

User's Manual

GEOMAR SOFTWARE INC.
Tel: 905.306.9215
Fax: 905.276.8158
E-mail: geomar@geomar.com

Copyright © 2010, Geomar Software Inc. All rights reserved.

Revision 1.37 — October 5, 2010

This manual may not, in whole or in part, be copied, photocopied, reproduced, translated or converted to any electronic medium or computer readable form without the prior written permission of Geomar Software Inc.

Geomar Software Inc.
899 Runningbrook Drive
Mississauga, Ontario, Canada L4Y 2S4
Tel: 905 306 9215
Fax: 905 276 8158
e-mail: geomar@geomar.com
web: www.geomar.com

Table of Contents

1. Introduction	1
1.1 About the NAV38MK2 Program	1
1.2 Program Requirements	4
1.3 Contents of NAV38MK2 Disk	4
1.4 Installing NAV38MK2	4
1.5 Software Key	5
1.6 Data File Transfer	6
1.7 Running NAV38MK2 Program	6
1.8 NAV38MK2 Program Overview	8
1.9 Surveys Carried Out With GPS Positioning	10
1.10 The NAV38MK2 System Geometry	11
2. Main Menu	13
2.1 Short Description of Main Screen Options.....	13
3. Survey Setup	15
4. System Setup.....	21
5. Logger Setup.....	25
5.1 Bluetooth Connection of EM38-MK2 and Allegro CX.....	31
5.2 Data Output Port Setup.....	34
6. GPS Port Setup & Monitoring	37
6.1 GPS Port Setup.....	37
GPS Port Setup Parameters.....	37
GPS Warning Mask Parameters.....	41
6.2 Monitoring GPS Receiver Output	43
7. Map and Profile Options.....	49
7.1 Map Display Options.....	49
7.2 Profile Display Options.....	51

8.	Logging.....	55
8.1	Logging Screen Layout and Monitoring Mode	56
	Navigation Mode	57
	Profile Mode	59
8.2	Options Available in Monitoring Mode	62
8.3	Stand By Mode.....	79
8.4	Logging Mode.....	80
8.5	Field Options Available in Stand By Mode.....	82
8.6	Message NO CONNECTION.....	98
Appendix A.	NAV38MK2 Data File	101
A.1	Description of NAV38MK2 Data File Format (382)	101
A.2	Example of NAV38MK2 Data File	107
A.3	Description of GXY Data File	108
Appendix B.	NAV38MK2 and GPS Input	109
B.1	Using the NAV38MK2 with a GPS System	109
B.2	Description of Selected NMEA Data Messages	111
	GGA Data Message	111
	GSA Data Message	112
	POS Data Message	112
	LLK Data Message.....	113
	LLQ Data Message.....	114
	GLL Data Message	114
	GGK Data Message	115
B.3	Configuring GPS Trimble Pathfinder ProXRS System.....	116

Introduction

1

The Geomar TrackMaker38MK2 Data Logging System for Geonics EM38-MK2 consists of a data acquisition program NAV38MK2 and associated PC computer program TrackMaker38MK2. This manual describes the use of the NAV38MK2 program used with the Allegro CX field computer (operating under MS Windows CE.NET V4.20 system), Geonics EM38-MK2 or EM38-MK2-1 instrument, and Global Positioning System (GPS).

Two models of the EM38-MK2 are available: EM38-MK2-1 and EM38-MK2. While both units are similar and include the simultaneous measurement of both quad-phase (conductivity) and in-phase (magnetic susceptibility) components, the main difference between the models is the number of receiver coils: the EM38-MK2-1 includes one receiver coil with a 1 meter transmitter - receiver inter-coil spacing and the EM38-MK2 includes two receiver coils with 0.5 and 1 meter inter-coil spacings. All references to the EM38-MK2 in this manual are applicable to both of the models described above, unless differences are specified.

The associated program TrackMaker38MK2 is used to process data files recorded under the control of program NAV38MK2. Main function of this program is to position the EM38-MK2 sensor based on the recorded GPS position and the configuration of the system. The TrackMaker38MK2 also allows you to correct the collected GPS positions with post-processed GPS files. In case of grid based surveys (without GPS positioning) the program will layout the survey grid based on survey setup parameters and the system geometry. Alternatively, the grid based data files can be exported to Geonics DAT38MK2 (M38) format and data can be processed using the Geonics program DAT38MK2.

1.1 About the NAV38MK2 Program

Program NAV38MK2 acquires and records survey data from the EM38-MK2 unit, under the control of the operator. It also records various field information such as survey line number (line name), starting station, increment, comments, etc. Readings are given in real time in mS/m or ppt. In addition, the program allows you to monitor the instrument output while data are not recorded. The NAV38MK2 also continuously monitors the EM38-MK2 measured components (Conductivity and Inphase) and instrument dipole mode (Vertical or Horizontal) for both coil separations (1 and 0.5 m), and state of fiducial marker without leaving the program.

During data collection the program can work in two display modes: navigation and profile mode. While in navigation mode, the main portion of the screen displays all logged positions marked by dots and current position of the system denoted by cross mark based on GPS input. The same part of the field computer display may also be switched to profile mode showing data in the form of profiles. Navigation mode is available only when working GPS is connected to the field computer.

In any display mode readings are additionally displayed in real time as numeric values in mS/m and ppt as well as in graphic mode, as moving graphic bars. The output of the instrument is represented by eight bars (four visible at any time depending on the dipole mode), for Conductivity and Inphase for 1.0 m coil separation and Conductivity and Inphase for 0.5 m coil separation (for Vertical or Horizontal dipole mode). This allows for very fast visual information about each channel.

The NAV38MK2 can act as a standalone GPS logger if required. This feature can be useful while mapping topographical features (roads, fences, etc.) that are to be presented together with EM38-MK2 data. These files have extension GXY and they can be used in Geomar data processing software for any other instrument (i.e. TrackMaker31, RTmap31, Multi61MK2, etc.).

When program operates in navigation mode the display is not limited to the current set of data. The user may also display positions from previously recorded NAV38MK2 (or GXY) file. This allows for the easy and fast location of the last recorded positions (i.e. from former day), as well as fill any gaps in the survey coverage.

The NAV38MK2 accepts NMEA-0183 compatible data from a GPS receiver directly connected to an Allegro field computer. GPS data which is embedded in the NAV38MK2 data file can be processed later in the Geomar TrackMaker38MK2 program. The connected GPS must be able to stream NMEA-0183 compatible messages. The NAV38MK2 uses one of the following types of NMEA messages: a pair GGA/GSA, GGA, POS, GLL, LLK, LLQ, GLL, and GGK, as well as positions given by Leica Robotics Total Station TPS 1100 and TPS1200, and Trimble RTS. Messages POS, GGK, and pair GGA/GSA are preferred since they contain all necessary information. GPS readings Latitude and Longitude, as well as parameters indicating quality of GPS signal: status of real time differential corrections, number of used satellites, and PDOP parameter, are displayed in real time.

The program NAV38MK2 is designed to work with GPS receiver. If for any reason the employed GPS cannot stream NMEA data and positions are logged separately in GPS field computer you can also use Geonics standard data acquisition program EM38-MK2 for Allegro CX. If data was collected with NAV38MK2 please convert files to Geonics

M38 format using TrackMaker38MK2. Later an option "Combine EM38-MK2 and GPS files" of the program DAT38MK2 can be used to position EM38-MK2 records.

If GPS data are not differentially corrected in real time and post processed GPS data will be used for positioning please log GPS data concurrently in NAV38MK2 and in GPS logger. An option "Position Readings using External GPS file" in TrackMaker38MK2 which uses satellite time recorded in both devices is much more accurate than any method that uses computer clock.

The program allows the user to set the EM38-MK2 into a specific instrument mode of operation: AUTO or Manual modes. In AUTO mode readings can be automatically recorded in desired time intervals, and in Manual mode readings are triggered manually by the operator. **When GPS is used for positioning, the AUTO mode is the preferred method of data recording.**

System and survey setup parameters are saved in a file, therefore they can be automatically used during subsequent data collection sessions.

Data file names, which can be set by the program based on the computer clock or they are user specified, have extension names **382**. Data files are saved to the folder DATANAV38MK2 by default. Deleting and renaming data files can be accomplished by using Windows CE functions.

Over 1,000,000 EM38-MK2 readings can be collected in the field computer Allegro with the memory of 64 Mb. This number has to be lowered for GPS data which depending on the used NMEA message may take approximately from 70 to 180 bytes per one GPS position. More data can be saved by using PC Memory Card (Storage Card option). One EM38-MK2 record takes 27 bytes. The NAV38MK2 can process, display, and record 21 readings per second, which is the maximum update rate of the EM38-MK2, with GPS receiver streaming positions at 1 Hz. However, the optimal update rate for electromagnetic data is 10 times per second, or 5 times per second if a large scale for the displayed map is to be used.

The maximum number of 14,400 GPS positions is allowed in one file. This corresponds to 4 hours of continuous data collection if GPS positions are collected every second, or 8 hours if GPS data is taken every 2 seconds. However, it is strongly advised to limit files to for example approximately 1 hour blocks, especially when using high frequency of EM38-MK2 data collection.

Data files are permanently saved every time a Pause button is used (whenever logging mode is changed from Logging to Stand By) during data logging. Therefore it is recommended to use Pause button as often as possible, at any turns between survey lines, breaks, etc.

It is strongly advised that even if your GPS receiver supports faster rates the 1 Hz update for GPS positions is used. NAV38MK2 will work with rates higher than 1 Hz, however operation will not be smooth when scrolling and rescaling display. The data processing program will interpolate all EM38-MK2 stations between GPS positions in the very similar way as GPS receiver in real time. When higher than 1 Hz or 2 Hz GPS rate is used all GPS messages are saved in data files for later processing, however, in real time positions are updated at 1 Hz or 2 Hz (depending on the selection) rate.

1.2 Program Requirements

To successfully use this software, you will need :

Computer

Field computer Allegro CX

Installed MS ActiveSync software (Version 3.50 or later) in desktop PC, or alternatively PCMCIA (PC Card) memory card to transfer files.

Geonics EM38-MK2

The EM38-MK2 or EM38-MK2-1 instrument with associated cables.

GPS Receiver

The GPS receiver capable of streaming NMEA messages (GGA, POS, GLL, LLQ, LLK, GGK), or alternatively Leica Robotics Total Station TPS1100 or TPS1200, or Trimble RTS.

1.3 Contents of NAV38MK2 disk

The program NAV38MK2 is stored on TrackMaker38MK2 CD distribution disk. All necessary initial files (with extension names .INI) are created in your computer after the program is run for the first time. Check that the file NAV38MK2.EXE is included on the CD or floppy disk.

1.4 Installing NAV38MK2

While using the Allegro CX the NAV38MK2.exe file can be transferred from a desktop PC using MS ActiveSync software and USB or serial cable provided by manufacturer. Optionally the program can be transferred to an Allegro using the PC memory card.

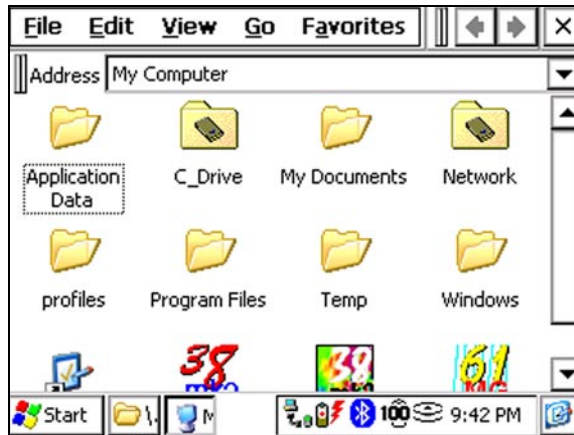


Figure 1.1: The Allegro CX display

It is recommended that the program be placed in non-volatile solid state storage. This memory is represented in the Allegro by the C_Drive icon (Figure 1.1). In the My Computer on the Allegro, double-tap on C_Drive icon, then folder C_Program Files will appear. The NAV38MK2 program can be placed in C_Program Files. Folders for data files should be also created in C_Drive, which is a safe area to store data. The program creates folder DATANAV38MK2 which is the default folder for NAV38MK2 files. The NAV38MK2 data files have extension name 382.

For more information about data storage options, refer to Chapter 3 of the Allegro CX manual.

1.5 Software Key

The data acquisition program NAV38MK2 is licensed for one field computer. Initialization of the program requires a software key that is based on the Allegro CX serial number. The software key can be given prior to the program installation if the user can provide serial number of the Allegro (it is placed in the Allegro battery compartment or it can be displayed using the Control Panel\System Allegro CX utility). Otherwise, during the first run (after any key is pressed or a command button is tapped) the program will display the Enter Software Key window (Figure 1.2) and the serial number of the Allegro CX will be displayed at the bottom of the window. Please forward this number to Geomar Software and the Software Key will be provided.



Figure 1.2: Enter Software Key window

Please enter the software key in the appropriate box in the Enter Software Key window (Figure 1.3) and tap OK or press the Enter key. From now on the program will run without any interruption, unless Allegro C_Drive is completely deleted or formatted. Any future updates of the program will not require entry of the software key.



Figure 1.3: Entering the Software Key

1.6 Data Files Transfer

Data files are saved in the Allegro with extension 382. Transfer of files to desktop PC can be performed with MS ActiveSync or by PC memory card. PC memory card as a way of data transfer is strongly recommended.

NAV38MK2 data files with extension 382 (or GXY if standalone GPS files are created) are binary data files. These files can be loaded and processed in the TrackMaker38MK2 program.

Please do not open binary 382 files in a text editor. While it is possible to view these files in text editor, any accidental Save will damage data file. If any binary data file is to be viewed in text editor please make a copy of the file first.

Also, please retain raw binary files till the end of the project. If any problem will arise original binary files in 382 format contain all necessary information that allows to trace potential problem.

1.7 Running NAV38MK2 Program

To run the NAV38MK2 locate program in C_Program Files and double-tap program icon (Figure 1.4). The NAV38MK2 is a Windows CE based, button and dialog driven program designed to be simple to use. Although the program fully supports touchscreen interface, the keyboard entry may be more convenient in most field applications. The NAV38MK2 can be almost fully operated from the keyboard when touchscreen functions are disabled by the user. However, while specifying colours and other options in Map and Profile Display Options it is much easier to use touchscreen, and in case of selecting colour from the Windows Color touchscreen is the only option.

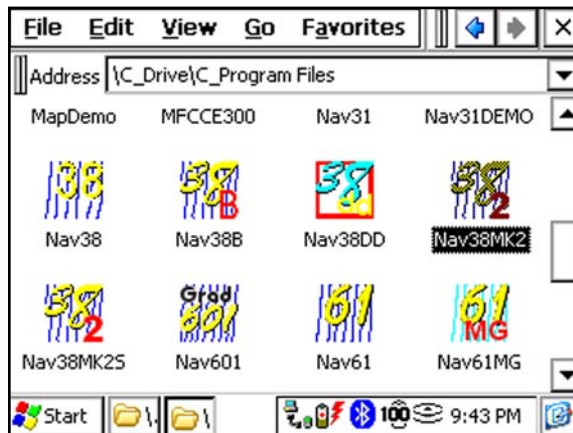


Figure 1.4: Starting the NAV38MK2 program

Options represented by the command buttons can be accessed by a single tap on the button. Buttons can also be selected from the keyboard by using shortcuts (pressing key corresponding to underline letter in button caption or by selecting button by pressing **TAB** and then execute by pressing **ENTER**. Shortcuts are the fastest way of accessing options represented by buttons.

Most options in the dialog windows are given in the form of text boxes and drop-down boxes which can be accessed using touchscreen or by the keyboard. Each dialog window has a title bar with a caption describing the dialog function and two buttons **OK** and **X (Cancel)**. The **OK** button (or key **ENTER**) confirms dialog selection. Tapping on the **Cancel** button (or pressing **Esc** key) closes the dialog and returns to the initial selection.

1.8 NAV38MK2 Program Overview

The data acquisition program NAV38MK2 was designed with field use in mind. This was the main thought while preparing the program flow. Once all necessary parameters are set in the program they are saved in initial files. Assuming that the survey set up is the same, when the program is started, the instrument and Allegro are turned on, output of the connected EM38-MK2 can be monitored after one key stroke. Obviously any parameters can be modified any time, however as long as the field procedure remains the same the program needs very minor adjustments, especially when survey is conducted using GPS positioning.

The instruments output is shown in the form of numeric values for Conductivity in mS/m or Inphase in ppt, as well as plotted in graphic mode (Figure 1.5). An equalizer type (graphic bars) displays data for Conductivity (or Inphase) as bars in two bar windows. Left bar window displays bars associated with Conductivity values, while right bar window displays Inphase readings. In each moving bar window, bar placed at the left edge of the window represents always readings for 1.0 m coil separation, while bar displayed at the right edge of the window corresponds to readings taken for 0.5 m separation. Bars are displayed for currently employed dipole mode, when the instrument dipole mode is changed from one to another dipole mode then a set of four bars is replaced by another set of bars with colors corresponding to the dipole mode. Current dipole mode (vertical or Horizontal) is also indicated by the label (V or H) displayed under the set of command buttons (following file name, see Figure 1.5 and 1.6). In addition moving bars are displayed with different colours that correspond to profile curves colours specified in Profile Display Options dialog. Range of displayed components is common for moving bars windows and profile window (in Profile mode). This type of display allows for a legible and very quick estimation of the EM38-MK2 performance. When more detailed monitoring is required each measured value is displayed in numeric form in mS/m and

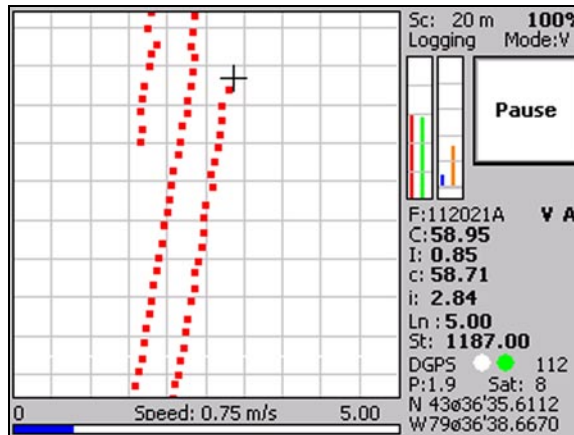


Figure 1.5: The NAV38MK2 in the Navigation mode

ppt as well. In addition the program can be used in display profile mode and then profiles with last 180 readings are shown in form of profile curves.

When all settings for the system and survey (discussed in later sections) are specified, the user selects Logging option in Main menu of the program. This sets the program in Monitoring mode which allows you to examine the EM38-MK2 outputs and GPS performance. To record data one has to specify the data file name. The program will not allow you to overwrite an existing file. After the data file is created the program will switch to Stand By mode. The Stand By mode allows for continuous data monitoring as well as use available field options. Tapping the Go button (or pressing key G or <ENTER> if it is default button) will change the program to Logging mode and EM38-MK2 and GPS data will be recorded in the data file according to selected mode of operation.

Change of display type between Navigation and Profile modes can be performed by pressing key T (toggle) in the Monitoring or Stand By mode. When working GPS receiver is connected to the field computer then program uses Navigation mode by default. The NAV38MK2 screen in Navigation mode is shown in Figure 1.5. If GPS is not used during the survey the default type of display is Profile mode and Navigation mode is not accessible. Example of the NAV38MK2 screen in Profile mode is given in Figure 1.6. When changing display from Profile to Navigation mode while large number of data is collected, a message Wait is displayed and the program may take several seconds to select the needed coordinates while scanning the entire database of collected positions. There is no such delay during scrolling since the program keeps track of survey path while in navigation mode.

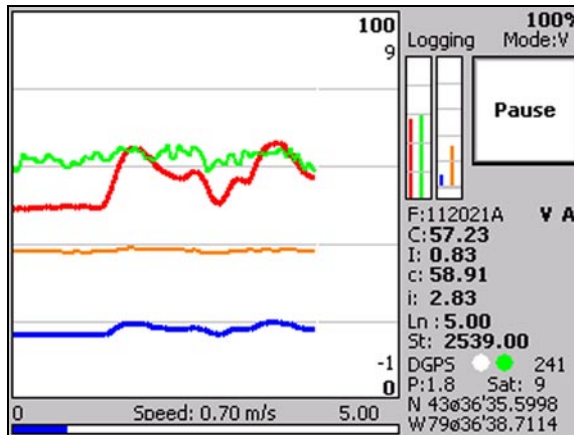


Figure 1.6: The NAV38MK2 in the Profile mode

The maximum number of 14,400 GPS positions is allowed in one file. This corresponds to 4 hours of continuous data collection if GPS positions are collected every second, or 8 hours if GPS data is taken every 2 seconds. However, it is strongly advised to limit files to for example approximately 1 hour blocks, especially when using high frequency of EM38-MK2 data collection. In case of any possible error in data file it is much easier to correct smaller file. Data files are permanently saved every time PAUSE key is used. Therefore, it is good practice to pause data recording at any possible moment, for example at the end of each survey line, at any obstruction, etc.

All data files are created in the program data default directory DATANAV38MK2. This directory contains also initial files. Alternatively data can be recorded in files stored in PC Memory Card (Storage Card option). All data files have extension name 382, and files that contain only GPS positions have extension names GXY.

1.9 Surveys Carried Out With GPS Positioning

Most of the stations positions for surveys positioned with GPS receiver will be calculated based on the GPS antenna position and instant heading of the array. In order to achieve higher quality of data positioning the survey should be carried out along relatively smooth pathways, especially if GPS antenna is located not in the center of the instrument.

When the direction of the survey line is changed it is advised to pause recording of data for the duration of U-turn. Toggling between Stand By mode (pause) and Log mode is

relatively easy in the most difficult field conditions, it is done by one key stroke (Pause and Start keys), and it can save time during data processing.

Similar approach applies to situations when the system is stopped. In this case if readings are not paused, the random distribution of small GPS errors will likely result in unreliable locations of calculated sensor positions. If the offset of GPS antenna is used it may appear that the instrument is rotating since GPS errors occur in many directions. Pausing readings while the system is stopped will save time during data processing and will result in better data presentation.

1.10 The NAV38MK2 System Geometry

When a survey is positioned by GPS system the program allows to specify the GPS antenna offset from the EM38-MK2 center. Two parameters, GPS X Offset and GPS Y offset describe location of GPS antenna. This location is represented by the distance which is measured from the center of the conductivity meter to the center of the GPS antenna, while facing direction of the movement, see Figure 1.7.

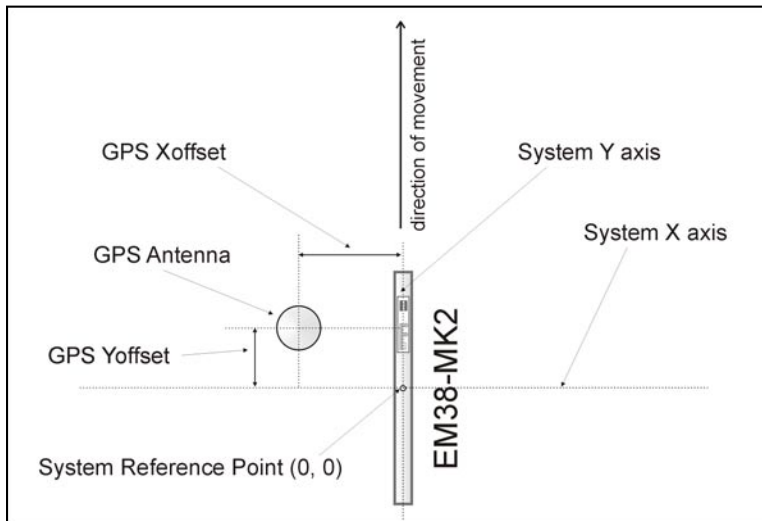


Figure 1.7: The NAV38MK2 system geometry

The antenna can be placed anywhere in relation to the instrument center. However to achieve higher accuracy of the calculated positions the GPS antenna must be placed as close to the center of the system as possible.

This option is provided mainly for common situations where the operator carries the EM38-MK2 on his right side, and GPS antenna (placed in backpack) is located above his left shoulder. In this case distance between GPS antenna and the instrument (GPS Xoffset) is negative.

The offset in other direction (GPS Yoffset) can be used if the instrument is towed as long as the GPS antenna is located on the same trailer as the EM38-MK2, see Figure 1.8. If GPS antenna is located i.e. on ATV and the EM38-MK2 is placed on the trailer (there is a point of rotation between them) then the program TrackMaker38MK2 may provide not accurate results. In such case use program GPS-XYZ (in development) to calculate layback of the instrument.

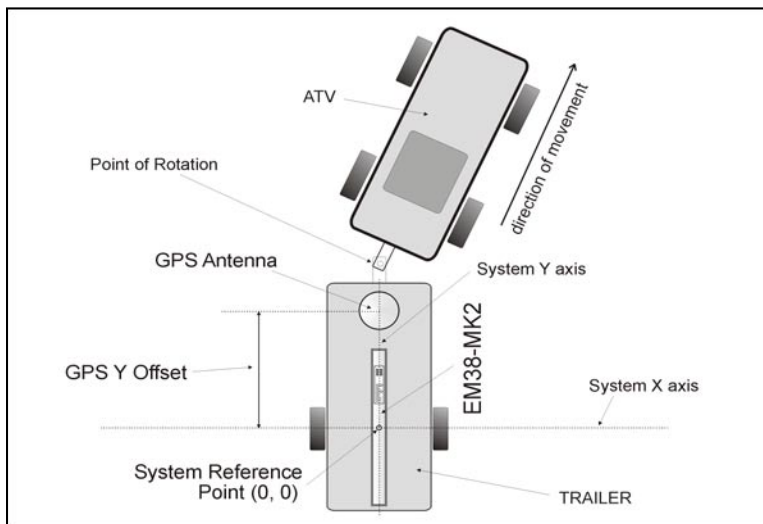


Figure 1.8: The NAV38MK2 system geometry for trailer mounted EM38-MK2

In the case where a wrong value was entered in the field, GPS X Offset and GPS Y Offset parameters can be corrected later during data processing in the program TrackMaker38MK2.

Main Screen

2

The Main Screen appears always as the first display after the program is started. It contains the name of the program, its version number, and a list of buttons representing the available options. The NAV38MK2 Main Screen is displayed below in Figure 2.1.

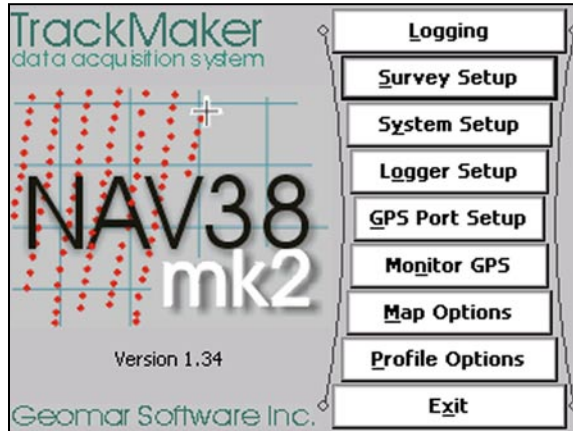


Figure 2.1: NAV38MK2 Main Screen

These options are selected by using tapping buttons, or from keyboard using TAB/ENTER or shortcuts indicated by underline label characters. In case of Main Screen buttons the **Down** and **Up** arrow keys and **<ENTER>** can be used as well. Short description for each of the options follows.

2.1 Short Description of Main Screen Options

Logging

This option allows you to monitor and log the EM38-MK2 output and GPS receiver positions. Logging screen starts always in Monitor mode, and then after a data file is created Logging mode is available. Monitor mode provides initial inspection of the range of the instrument readings at the particular site, and quick inspection of the instrument settings and GPS receiver performance.

Survey Setup

Dialog that is associated with this option is used to set triggering mode (Auto or Manual), survey line name, line and station increments, and other parameters which are necessary to determine survey settings.

System Setup

This option allows user to enable and disable (if GXY file is to be collected) instrument connection to the logger, to select EM38-MK2 type, and to specify X and Y offsets of GPS antenna.

Logger Setup

The dialog that is associated with this option is used to assign serial port number to the instrument, distance units, speed units, audio click, type of pause key, and selection of data storage.

GPS Port Setup

This option allows you to disable and enable GPS data acquisition. This dialog is also used to specify NMEA message that is streamed by GPS receiver (includes selection of Leica TPS and Trimble RTS), set the serial port number used for GPS input, specify necessary serial port communication settings.

In addition this dialog provides set of parameters that enable and determine GPS Warning Mask function and selection of maximum real time display update rate.

The GPS Port Setup is also used to setup communication parameters when other (than GPS) supported positioning systems are used (currently Leica TPS and Trimble RTS Robotic Total Stations).

Monitor GPS

The GPS Monitoring window will be displayed. This option allows you to monitor GPS receiver output, as well as send command to GPS receiver (assuming that GPS device can accept input commands).

Map Options

The dialog that is associated with this option is used to specify plotting parameters for the navigation mode, mainly colours and size of cursor and positions.

Profile Options

This option allows you to select profiles to be displayed, including colour as well as thickness of each profile separately.

Exit

Selecting this option will terminate the program execution.

The Survey Setup dialog, presented below in Figure 3.1, contains several parameters which affect two important procedures: instrument settings (instrument mode, frequency of data collection, etc.) and survey geometry layout (survey line names, line spacing, start station, station increment, etc.).

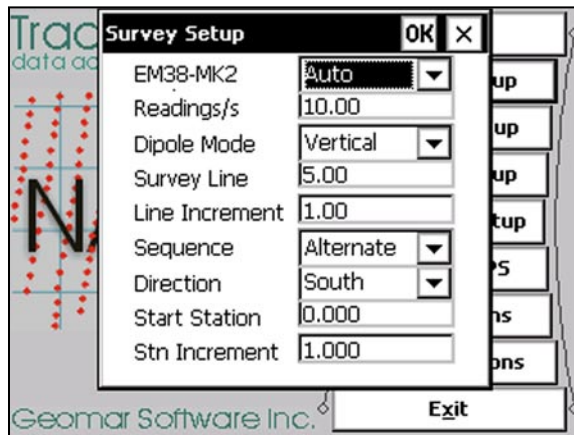


Figure 3.1: Survey Setup dialog in Auto mode configuration

Description of the Survey Setup dialog options and parameters.

EM38MK2 Mode

This option allows you to select the type of instrument survey mode. Set the EM38MK2 mode of operation by selecting an item from the drop-down list box labeled EM38MK2 Mode. Available modes are: Auto and Manual. These modes of operation are described below.

Auto Mode

Readings will be triggered automatically at a specified frequency (see option Readings/s). In Auto Mode only one dipole mode (Vertical or Horizontal) can be selected.

Please note that when Auto mode is selected the option displayed below is Readings/s, see Figure 3.1 .

Manual Mode

Readings will be taken only while the manual trigger (switch on the instrument console or a handle) is pressed.

In Manual Mode both dipole modes (Vertical and Horizontal) labeled Both can be selected.

Please note that when Manual mode is selected the option displayed below is Samples/Rdg (Figure 3.2).

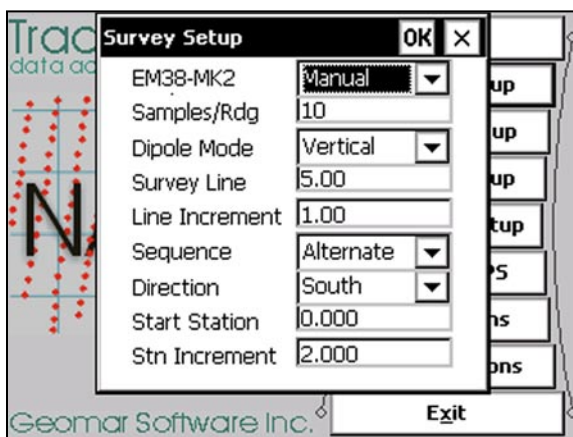


Figure 3.2: Survey Setup dialog in Manual mode configuration

It should be noted that Auto mode is preferable while conducting survey with GPS receiver positioning.

Readings/s

This parameter is displayed only when the Auto Mode was selected. Activate text box by tapping or using TAB key and then enter desired value. The edit box accepts only positive numerical values.

This parameter describes number of readings per second that will be taken. Any number larger than zero can be entered, however the EM38-MK2 fixed frequency of data output is approximately 21 readings per second. Therefore any entered value is rounded to the nearest possible base frequency of the instrument, i.e. user specified frequency of 20 readings/s will result in effective data acquisition rate of 21 readings/s (every reading is logged), 6 readings/s will cause program to log at a rate of 5.25 readings/s (every fourth reading from instrument output is logged), etc. At slower rates the difference between specified and effective frequencies is negligible.

Samples/Rdg (Samples per Reading)

When this option is highlighted the editor is activated and you can enter desired value. The editor accepts only numerical positive values.

This parameter describes number of readings that will be taken after the trigger switch is pressed. At the end of sampling time the logger will beep and an average value will be written in to the file and plotted on the screen. During the sampling period interval data are measured at approximately 21 readings per second. For example by specifying 20 samples, 1 second will be used at each station. The maximal sampling is 100 readings which corresponds to approximately 5 seconds at each station.

This option could be used to improve quality of data in areas of high industrial noise, especially if the ground conductivity is relatively low (small response signal).

In cases when multiple sampling is not required (good signal to noise ratio) enter the value 0 or 1 and 1 reading per station will be taken.

This parameter is displayed only when the Manual Mode was selected.

Dipole Mode (instrument dipole mode)

Tap on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box and then by using up or down arrow keys select one of three available items: Vertical, Horizontal, and Both.

When Manual mode was selected three settings are available: Vertical, Horizontal, and Both. If Auto or Wheel mode was selected two available dipole mode settings are: Vertical and Horizontal (Figure 3.3).

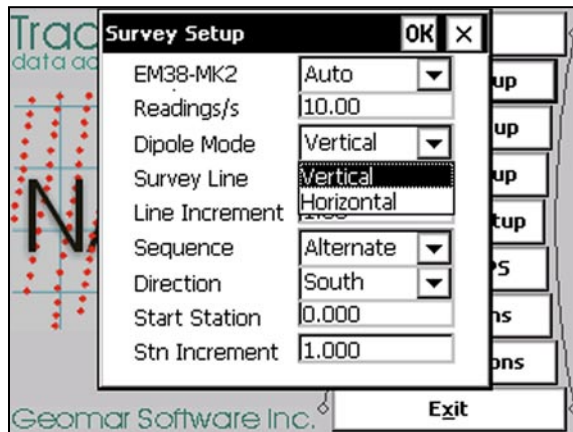


Figure 3.3: Selecting Dipole Mode in Auto mode

Survey Line (survey line name)

Activate text box by tapping or using TAB key and then enter desired name (number) for the survey line.

This is a user's tag number/name for the profile line. The length of the name can not exceed 8 characters.

In case the survey is positioned with GPS system, the Survey Line (and all following parameters described below) can be ignored. The Survey Line, however, can have informative meaning, it can be used to divide or to distinguish certain portions of the survey, without creating new file for each set of data.

During surveys conducted along grid (no GPS positioning) the line name is usually used as a coordinate perpendicular to the survey lines direction. For example, when survey lines are laid out along W-E direction stations describe W-E coordinate, while Line names may describe S-N (vertical on a map) coordinate. If survey is conducted along grid (no GPS positioning) use negative numbers to indicate South and West direction. Letters associated with direction (S, N, W, E) can be used, however they must follow numbers and they will be ignored during creating XYZ file in the Geonics DAT38MK2 program (i.e. Line -20S, will be assigned to coordinate -20, South or West depending on the survey layout, while Line 20S will indicate coordinate 20, North or East depending on the survey layout). Letters used in Survey Line name have only informative meaning, they can be used also for naming the same lines, either portions of the same line or if a survey line is repeated (computer program will assign the same coordinate for lines 10, 10A, and so on).

Line Increment

Activate text box by tapping or using TAB key and then enter desired for the survey line increment.

This parameter specifies the distance by which survey lines will be separated. This setting will be used to determine number (name) of the next survey line and will provide automatic survey line name while executing option Quick Line. This parameter can be ignored if survey is positioned with GPS system.

Sequence

Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box and then by using up or down arrow keys select one of two available items: Alternate and One Way (Figure 3.4).

Alternate is used when neighboring lines are surveyed in the opposite direction, which is the most common procedure during field surveys.

One Way is used when each survey line is traversed in the same direction.

The choice of this parameter will affect the default start station, a signature of

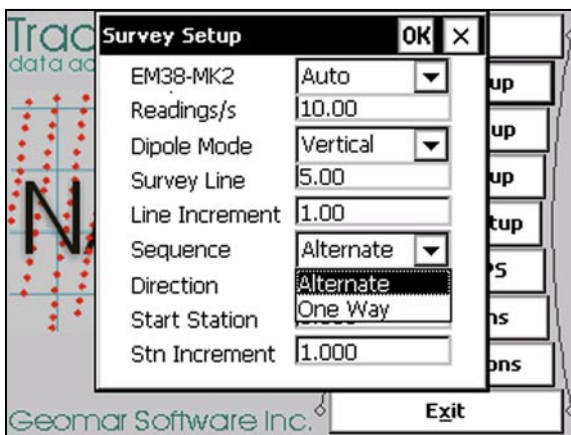


Figure 3.4: Survey Line Sequence options

the station increment, and line direction when parameters for the next survey lines is determined.

This parameter can be ignored if survey is positioned with GPS system.

Direction

Tap on the down arrow next to the text box and a drop-down box will open showing the available options, or when the keyboard is used activate the text box and then by using up or down arrow keys select one of four available settings: East, West, South, and North (Figure 3.5).

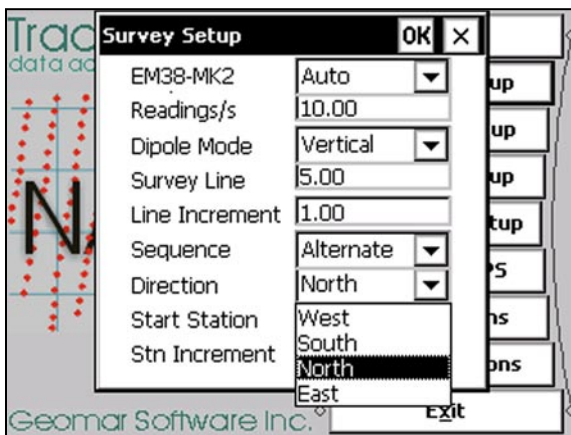


Figure 3.5: Selecting Direction of Survey Line

This parameter indicates the heading of the survey line and it can be ignored if survey is positioned with GPS system.

When survey is conducted along a grid, the Direction has only informative meaning. During generating XYZ file, only three parameters: Survey Line Name, Start Station and Station Increment, will be used to determine geometry of the survey layout.

Start Station (start station of a survey line)

Activate text box by tapping or using **TAB** key and then enter the desired value for the start station.

This parameter specifies the starting station number for the selected survey line. This value is used in conjunction with Station Increment to calculate the current station number for display purposes.

If GPS positioning is used, this parameter has only informative meaning. The most convenient is to set Start Station to 0, then (if Auto mode is used and Station Increment = 1) the current station will indicate number of stations taken since the start of the data file.

Stn Increment (station or wheel increment)

Activate text box by tapping or using **TAB** key and then enter the desired value for the station increment.

This parameter specifies the station increment for the selected survey line. This value is used in conjunction with Start Station to calculate the current station number for display purposes.

If GPS positioning is used the most convenient is to set the Station Increment equal 1. The station displayed during data recording will indicate number of stations taken since the start of the data file.

After all the parameters in the Survey Setup dialog are updated tap the button **OK** or press **ENTER** key to accept the displayed settings. The program will return to the Main Screen. Updated settings will be written to the initial file and they will be given as default parameters in the subsequent Survey Setup dialog.

To return to original settings (state before this dialog was selected) tap **Cancel (X)** button or press **Esc** key. All parameters will be reset to initial settings and the program will return to the Main Screen.

The System Setup dialog, presented below in Figure 4.1, contains four parameters which enable and disable instrument connection, selects type of the EM38-MK2, and specifies GPS antenna offsets in two directions.



Figure 4.1: System Setup dialog

Description of the System Setup dialog options and parameters.

EM38MK2 (Enable/Disable)

Tap on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box and then by using up or down arrow keys select one of two available items: Enabled or Disabled.

Select Enable for normal operation when EM38-MK2 are to be recorded.

When Disabled is selected the program will not record, nor will check for presence of the EM38-MK2 instrument. This feature is used when only GPS positions are to be recorded. In this case created data file will have extension name GXY. These files can be used to survey roads, fences, buildings, or any other topographical features.

EM38-MK2 Type

Tap on the down arrow next to the text box opens a drop-down box showing the available settings (Figure 4.2), or when the keyboard is used activate the text box and then by using up or down arrow keys select one of two available



Figure 4.2: Selection of the EM38-MK2 Type

items: EM38-MK2-1 and EM38-MK2. The EM38-MK2 is the standard instrument with two coils separations: 1.0 m and 0.5 m, while the EM38-MK2-1 has only one coils separation 1.0 m. All data coming from the instrument are saved in original form in the data file, therefore in case of an error in selection all readings can be retrieved in the data processing program. The error can be also noticed in the field, if the EM38-MK2-1 is selected only two readings will be displayed in numeric form while in case of the EM38-MK2 four readings will be displayed.

GPS X Offset

GPS Y Offset

Activate GPS X Offset or GPS Y Offset text box by tapping or using TAB key and then enter value for corresponding offset

These two options apply only when a survey is positioned by GPS system. The GPS X and Y offsets describes location of GPS antenna. This location is represented by the distance which is measured from the center of the conductivity meter to the center of the GPS antenna, while facing direction of the movement, see Figure 4.3.

The GPS Antenna offset distances can be given in meters or feet depending on the Distance Unit setting in the Logger Setup menu.

GPS antenna can be placed anywhere in relation to the instrument center. However to achieve higher accuracy of the calculated positions the GPS antenna must be placed as close to the center of the system as possible.

This option is provided mainly for common situations where the operator car-

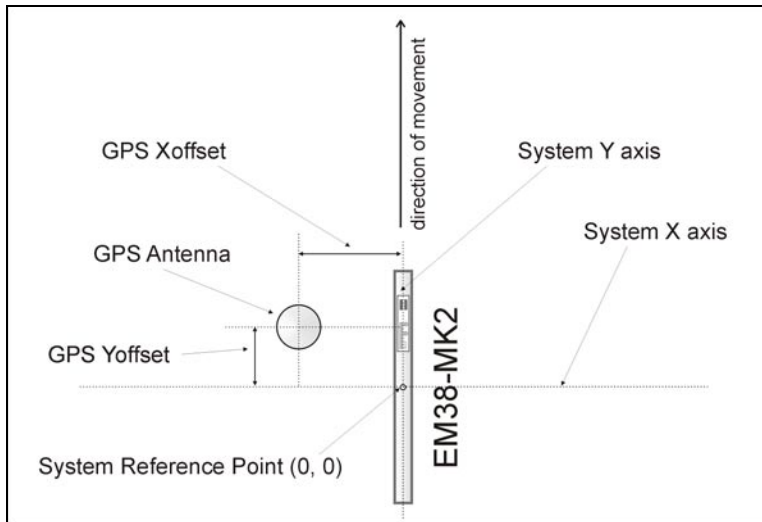


Figure 4.3: Geometry of the instrument and GPS in the field

ries the EM38MK2 on his right side, and GPS antenna (placed in backpack) is located above his left shoulder. In this case distance between GPS antenna and the instrument (GPS Xoffset) is negative.

The offset in other direction (GPS Yoffset) can be used if the instrument is towed as long as the GPS antenna is located on the same trailer as the EM38-MK2 (Figure 4.4). If GPS antenna is located i.e. on ATV and the EM38-MK2

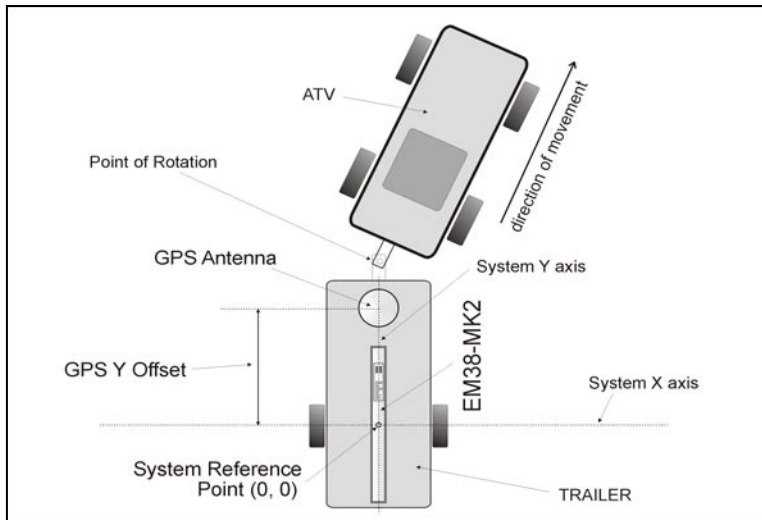


Figure 4.4: Geometry of the EM38-MK2 and GPS antenna during towing

is placed on the trailer (there is a point of rotation between them) then the program TrackMaker38MK2 may provide not accurate results. In such case use program GPS-XYZ (in preparation) to calculate layback of the instrument. In the case where a wrong value was entered in the field, GPS X and Y offset parameters can be corrected later during data processing in the program TrackMaker38MK2.

After all the parameters in the System Setup dialog are updated tap the button **OK** or press **ENTER** key to accept the displayed settings. The program will return to the Main Screen. Updated settings will be written to the initial file and they will be given as default parameters in the subsequent Survey Setup dialog.

To return to original settings (state before this dialog was selected) tap **Cancel (X)** button or press **Esc** key. All parameters will be reset to initial settings and the program will return to the Main Screen.

The Logger Setup dialog, presented below in Figure 5.1, contains parameters associated with logger (field computer) settings: assignment of the instrument serial port, assignment of port for External Marker (separate hardware marker), enabling Soft Marker (software based marker), units used for stations and GPS antenna offsets, units used for the speed bar, audible signal when reading is taken, choice of Pause key combination, selection of data files storage, and setup of the optional Data Output Port.

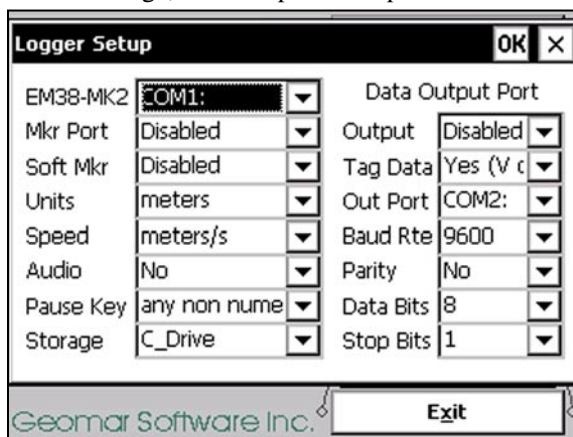


Figure 5.1: Logger Setup dialog

Description of the Logger Setup dialog options and parameters.

EM38-MK2 Port

Tap on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box and then by using up or down arrow keys select one of the available items: COM1 to COM12, or Bluetooth connection.

This parameter describes how EM38-MK2 is connected to the field computer. The program supports Serial Ports 1 to 12, with the exception of COM6 that is named as Bluetooth and assigned for Bluetooth communication. Connection of EM38-MK2 and Allegro via Bluetooth is described below in section 5.1. Any serial port can be assigned to the instrument. Care should be taken the EM38-MK2 instrument is connected to the proper (indicated here) serial port. The program default is COM1. Communication parameters for the selected serial port are set by the program, since the EM38-MK2 operates at fixed settings: Baud Rate (19200), Parity (N), Data Bits (8), and Bit Stop (1).

This port must be different than the port specified in the Set Port for GPS option (see next chapter), otherwise a warning message will be displayed and ports will have to be reassigned. Select port in the drop-down list box (Figure 5.2).

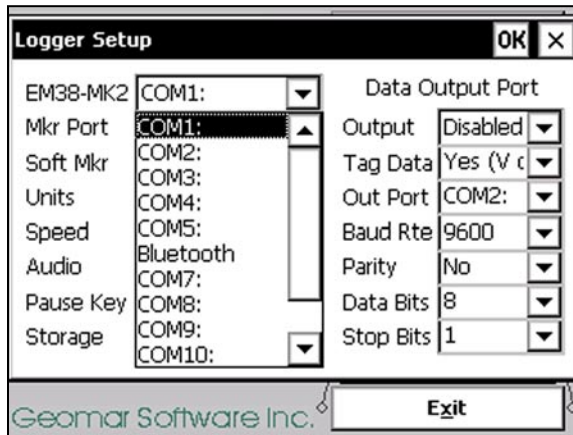


Figure 5.2: Setting Port for EM38-MK2

Ext. Marker Port (External Marker Port)

An optional External Marker can be connected to one of the available serial ports. This option displays the number of serial ports that are assigned to the External Marker. Available selections: **Disabled**, **COM1**, **COM2**, **COM3**, ... to **COM12**, with the exception of COM6 that is assigned for Bluetooth communication. The program default is **Disabled**.

Select port number or deactivate External Marker by selecting **Disabled** in the drop-down list box (Figure 5.3).

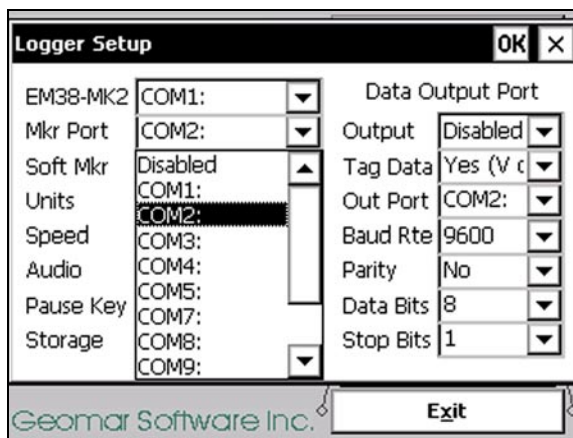


Figure 5.3: Setting Port for External Marker

This port must be different than the port specified in the Set Port for GPS option (see next chapter), otherwise a message will be displayed and the ports will have to be reassigned.

In case the External Marker is placed on the EM38-MK2 Extender Arm and the EM38-MK2 is connected to the Allegro CX by cable then both EM38-MK2 Port and External Marker Port must indicate same serial port (usually COM1: or COM2:). When using the same setup (External Marker located on the Extender Arm) while the Bluetooth connection is used to acquire data from the EM38-MK2, the EM38-MK2 Port must be specified as Bluetooth and External Marker Port as physical serial port (COM1: or COM2:).

Soft Marker (Software Based Marker)

A software based fiducial marker is available in addition to the standard fiducial markers (located on the instrument panel, on the optional Extender Arm, and the optional External Marker connected to one of the serial ports). All three types of fiducial markers provide the same function and are saved in the data file. Tags for each type of marker are different however the data processing program TrackMaker38MK2 recognizes any of these markers.

There are two available selections for the Soft Marker: **Disabled** and **any numeric key** (Figure 5.4). When the latter option is selected pressing any numeric key (from 0 to 9) on the Allegro CX keypad during logging session will tag current station as a station with fiducial marker. It acts exactly the same way as a standard marker located on the instrument panel.

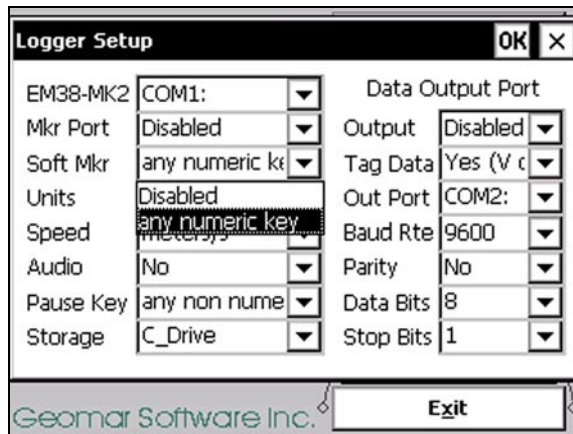


Figure 5.4: Setting Software Based Marker

Enable the Soft Marker by selecting **any numeric key** or deactivate this option by selecting **Disabled**.

Units

Tap on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box and then by using up or down arrow keys select one of available items.

Two selections are available: **Meters** or **Feet**. These units will be used to display positions and scale map in navigation mode, and to calculate positions for the instrument in program TrackMaker38MK2 if one of the offsets for GPS antenna is different than zero. All parameters that describe geometry of the system should be specified using units selected at this option.

Since length of EM38-MK2 sensor is described in meters (1 m length), it may be more natural and easier to use meters during description of a system geometry (GPS antenna X-offset and Y-offset).

In case wrong selection was entered, units or other parameters can be corrected later in the program TrackMaker38MK2.

Speed Units

Tap on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used navigate to the text box by TAB key and then by using up or down arrow keys select one of available options (Figure 5.5).

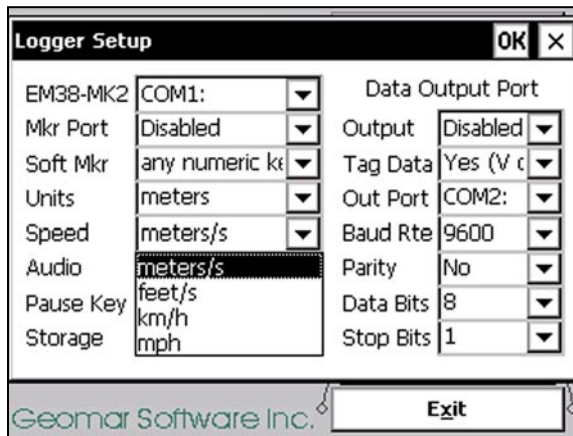


Figure 5.5: Setting Speed Units for Speed Bar

Four selections are available: **meters/s** , **feet/s**, **km/h**, and **mph**. These units will be used to calculate the system speed based on the current and former GPS antenna position. Speed is displayed graphically as a speed bar and in numeric form while logging data during GPS based surveys.

This parameter can be changed later using Menu options during data logging.

Audio

Two selections are available: **Yes** or **No**. The audible click will be generated at each reading when this option is enabled. At fast rate (above 10 readings/s) the sound may appear not uniform, however this does not affect quality of data acquisition.

Pause key

Tap on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used navigate to the text box by TAB key and then by using up or down arrow keys select one of available options (Figure 5.6).

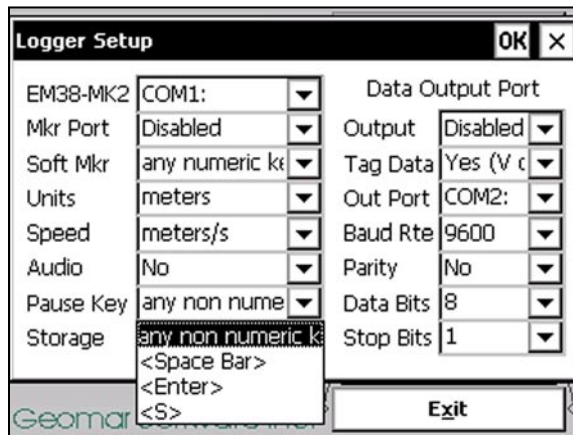


Figure 5.6: Selecting Pause Key in the Logger Setup dialog

Four selections are available: **any non numeric key**, **Space Bar**, **Enter**, and **P**. Numeric keys are reserved for the software based marker (Soft Marker). The selected key (or keys) are used to pause data recording during logging session. Default setting **any non numeric key** can be changed to one of the three specific keys for field conditions where a logger key can be accidentally pushed causing unwanted stop of data logging.

Data Storage

A tap on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used navigate to the text box by TAB key and then by using up or down arrow keys select one of two available options (Figure 5.5).

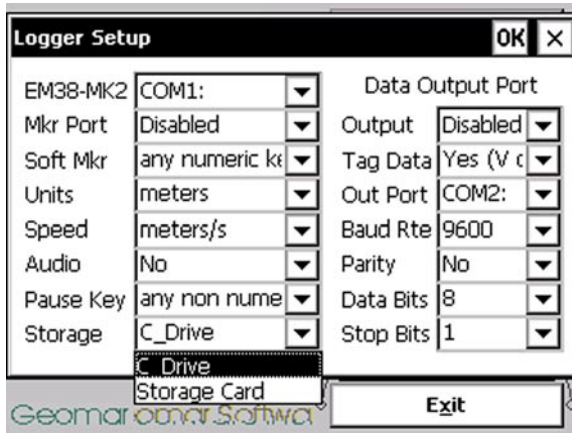


Figure 5.7: Selecting Data Storage in the Logger Setup dialog

Two options are available: **C_Drive** (default) or **Storage_Card**. The **C_Drive** option will create data files in the built in non volatile memory of the Allegro CX field computer. The **Storage_Card** option is available only when PC memory card is inserted in to Allegro CX PCMCIA slot (located behind the display).

The Data Output Port parameters are described later in this chapter in section 5.2.

After all the parameters in the Logger Setup dialog are updated tap the button **OK** or press **ENTER** key to accept the displayed settings. The program will return to the Main Screen. Updated settings will be written to the initial file and they will be given as default parameters in the subsequent Logger Setup dialog.

To return to original settings (state before this dialog was selected) tap **Cancel (X)** button or press **Esc** key. All parameters will be reset to initial settings and the program will return to the Main Screen.

5.1 Bluetooth Connection of EM38-MK2 and Allegro CX

Data can be transferred from EM38-MK2 to Allegro CX by a wireless Bluetooth connection. To select Bluetooth connection select Bluetooth item in EM38-MK2 Port list box (Figure 5.8).

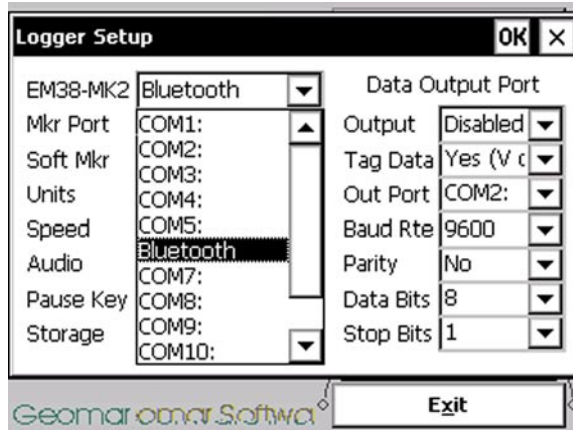


Figure 5.8: Selecting Bluetooth from the list of EM38-MK2 ports

When Bluetooth connection is selected and Logger Setup is closed by the **OK** button and other survey parameters are specified, please proceed and tap (or execute by keyboard) option **Logging** (Figure 5.9). **At that time the EM38-MK2 must be turned ON.**

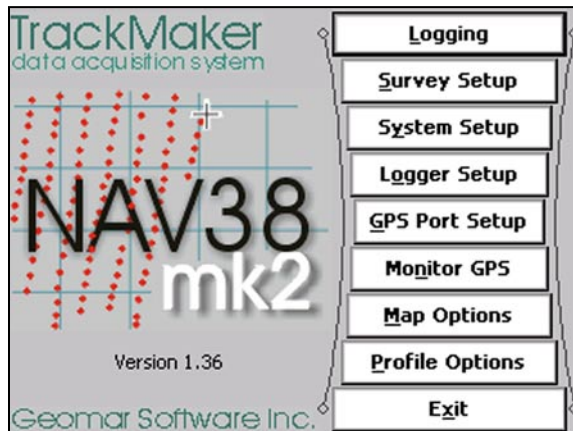


Figure 5.9: Executing Logging option

After the button **Logging** is tapped the Allegro CX operating system starts detecting all devices transmitting Bluetooth signal. The window shown in Figure 5.10 will be displayed.



Figure 5.10: Searching for Bluetooth devices

When progress bar in above window will end a list of detected Bluetooth devices will be displayed. In most cases it will be only EM38-MK2, however if any other Bluetooth enabled device (for example cellular telephone, GPS receiver, etc.) will be placed on the list (Figure 5.11).

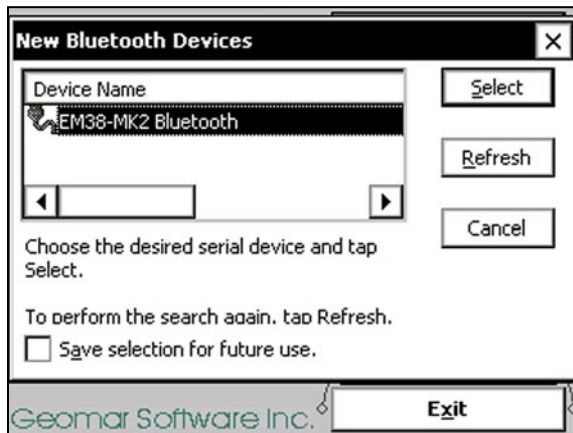


Figure 5.11: List of detected Bluetooth devices

Please select Geonics EM38-MK2 by highlighting and tapping the **Select** button. If Geonics EM38-MK2 is displayed as the only item, still the **Select** button must be tapped or executed from the keyboard (in most cases this button is highlighted, therefore pressing ENTER on the keyboard is sufficient). At this point the operating system will gather

necessary information from the EM38-MK2 Bluetooth device (Figure 5.12). No action is required, a windows shown below will be displayed for a few seconds.



Figure 5.12: Service Discovery message window

After above window will disappear the NAV38MK2 screen in Monitoring mode (Figure 5.13) will be displayed and the program can be operated in the exactly same manner as using standard serial port.

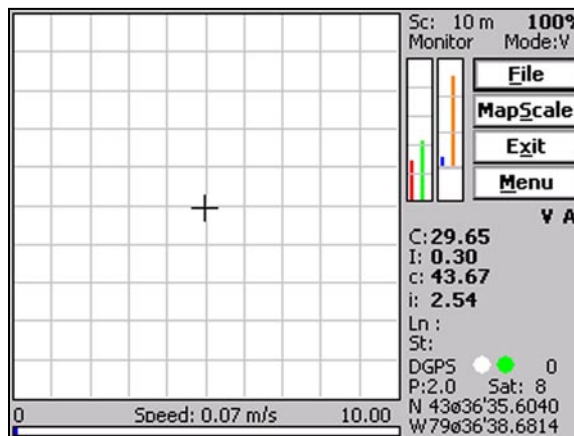


Figure 5.13: NAV38MK2 in Monitoring mode

Please note that during Bluetooth connection the instrument cannot be turned OFF. Any, even momentary rotation of the switch labeled MODE to position OFF will result in connection break and end of the logging mode. A new logging session will have to be started to continue measurements.

5.2 Data Output Port Setup

The section located in the right portion of the Logger Setup dialog is used to enable simultaneous output of data collected through a selected serial port. Data can be sent to other logging devices, including remote computers or devices connected by physical serial port or wireless modem. The data streamed by the output port is converted to ASCII format. The string containing data is formatted always in the following order: Conductivity for 1 m separation, Inphase for 1 m, Conductivity for 0.5 m, and Inphase for 0.5 m separation. Conductivity values are converted to mS/m while Inphase is sent as ppt of Primary Field. Optionally, for devices that can accept alphabetic characters the data stream may contain a tag V or H that indicates current dipole mode.

In addition to converting data from binary to ASCII (text) format the Data Output Port option acts also as a timing device. The data is streamed to the output port with a rate set in the Survey Setup dialog (see chapter 3, parameter Readings/s). Please note that a rate should be set according to the selected Baud Rate (below in this dialog) and capabilities of a receiving device. For example, selection of Baud Rate 9600 is too slow to accommodate the native update rate 21 Hz and the amount of data measured by the EM38-MK2, in this case a rate selected in Survey Setup dialog must not exceed 5 readings per second. To achieve faster data transmission use faster Baud Rate for the Output Port, Baud Rate set to 115200 will handle any update rate. Please test the connection at the receiving computer (or other device) end. The connection can be tested on any PC computer using Windows HyperTerminal (this program is not provided in Windows 7, however there are few equivalent programs or HyperTerminal software can be copied from any Windows XP operating system) .

This section of the dialog allows you to enable and disable the output, select format of output, and specify serial communication parameters matching external device settings.

Description of Options and Parameters:

Output

This option allows you to Enable/Disable a serial port data output. The Output can be Enabled even if there is no receiving device connected to the Allegro.

The stream of data is sent to the selected port regardless of the Logging mode, therefore it works in Monitoring, Stand By as well as Logging mode.

Tapping on the down arrow next to the text box labeled GPS Input opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by pressing TAB key and then by using up or down arrow keys select one of the two available items: Enable and Disable (Figure 5.14).

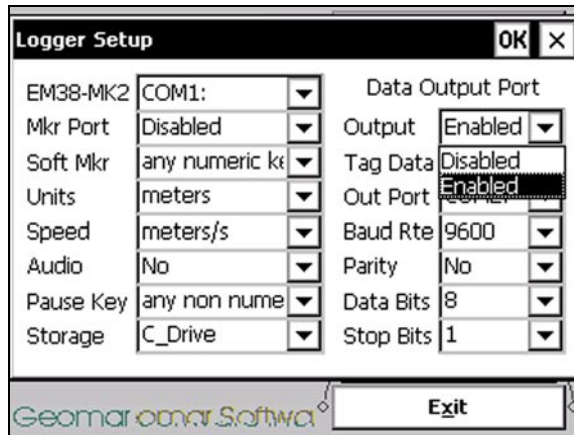


Figure 5.14: Data Output Port setting

Tag Data

This option allows you to specify the format of the output string. If **No** is selected then four numeric values (Conductivity 1 m, Inphase 1m, Conductivity 0.5 m, and Inphase 0.5 m) formatted as F11.2 will be sent, and when **Yes (V or H)** is selected then the same values will be preceded by V (Vertical) or H (Horizontal) depending on the EM38-MK2 dipole mode.

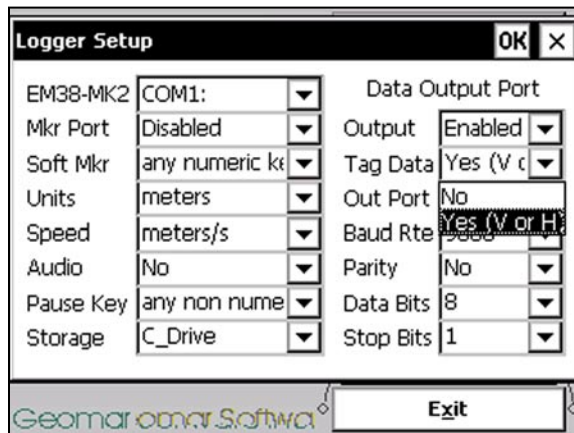


Figure 5.15: Selecting Output Format

Out Port (Output Port)

Tap on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box and then by using up or down arrow keys select one of the available items: COM1 to COM12 (Figure 5.16).

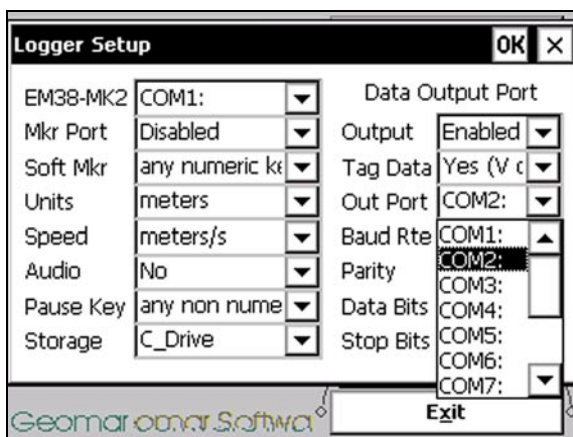


Figure 5.16: Selecting Output Port

This parameter describes how external computer or other device is connected to the Allegro CX field computer. The program supports Serial Ports 1 to 12, (Figure 5.16). If Bluetooth wireless connection is to be used then set this port to COM6 which is preset port for Bluetooth in Allegro CX. The Bluetooth connection is described above in section 5.1.

Any serial port can be assigned to the instrument. Care should be taken the EM38-MK2 instrument is connected to the proper (indicated here) serial port. The program default is COM2. The selected port must be different than the port specified in the EM38-MK2 entry (this dialog), Mkr Port (if used), and in the Set Port for GPS dialog if GPS receiver is employed, otherwise a warning message will be displayed and ports will have to be reassigned.

Baud Rate

Specify Baud Rate for the output port, the entered value should much the Baud Rate of the GPS system, default is 9600.

Parity

Select Parity for the output port, the entered parameter should much the Parity set in the GPS serial port settings, default is N.

Data Bits

Specify Data Bits for the output port, the entered value should much settings in the GPS system, default is 8.

Stop Bits

Specify Stop Bits for the output port, the entered value should much settings in the GPS system, default is 1.

GPS Port Setup & Monitoring

6

The GPS Port Setup dialog, presented in Figure 6.1, allows for enabling or disabling GPS input, choice of NMEA data string and RTS interface, setting parameters for serial port associated with GPS input, GPS Warning Mask parameters, and maximum display update rate. The GPS Monitoring window allows you to monitor the GPS output in terminal mode as well as to change GPS receiver settings by sending a NMEA command.

6.1 GPS Port Setup Dialog

After the GPS Port Setup button was tapped (or executed from the keyboard) in the Main Screen the GPS Port Setup dialog window is displayed (Figure 6.1).



Figure 6.1: The GPS Port Setup dialog window

Description of the GPS Port Setup menu options and parameters.

GPS Port Setup Parameters

GPS Input

Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by navigating with Tab key and then by using Up or Down arrow keys select one of the available items: Enabled and Disabled.

This option allows you to Enable/Disable a serial port for GPS input. When Disabled is chosen logging and monitoring screens will display message “GPS disabled” in place of GPS parameters. Also, when the Disabled item is selected NAV38MK2 will work only in Profile View mode, the Navigation mode will be unavailable.

The GPS Input can be Enabled even if there is no GPS system connected to the Allegro CX. In such case data file will contain proper sequence of EM38-MK2 readings without any GPS input.

NMEA Data

This option allows you to choose NMEA message. The NAV38MK2 can make use of messages: GGA, GGA with associated GSA sentence, POS, GLL, LLK, LLQ, GLL, GGK, and Leica Robotics Total Station TPS1100 and TPS1200, Figure 6.2. Therefore NMEA Data option has seven selections: GGA/GSA, GGA, POS, GLL, LLK, LLQ, GLL, GGK, Leica TPS (covers Leica TPS1100 and TPS1200), and Trimble RTS.

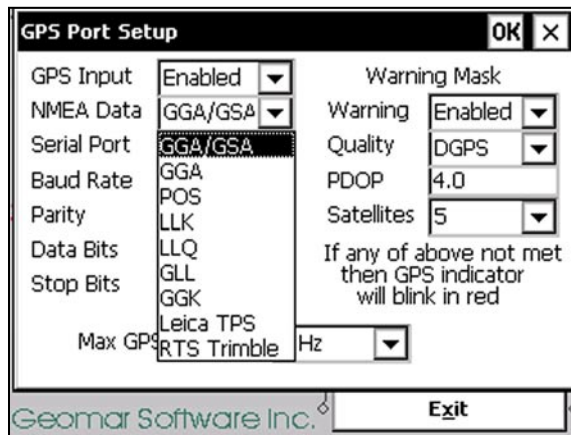


Figure 6.2: Selecting NMEA Data message

Message GGA is supported by almost all GPS receivers. This string is used to record GPS position, while associated message GSA is used to display parameter PDOP which indicates quality of GPS signal. If a GPS receiver supports only GGA string and option GGA/GSA is selected, GPS positions will be recorded using GGA message and PDOP parameter will be displayed as N/A (not available). In such case user should monitor quality of GPS signal using GPS receiver display or can monitor number of available satellites. If GGA option is selected a parameter HDOP will be displayed on the screen.

Messages POS and GGK which are supported by smaller number of manufacturers (however POS is available in all Ashtech receivers and GGK in some a

line of Trimble receivers) are somehow preferable since they contain all necessary information, including the PDOP, in one sentence. If your GPS receiver supports POS or GGK and GGA messages, and PDOP parameter is required, select POS or GGK which provide faster operation for the field computer. Messages LLK and LLQ are used in some Leica GPS systems and provide positions in meters in local coordinate system. When LLK is selected a parameter GDOP will be displayed on the screen. Message LLQ provides precision of positioning in meters and this parameter will be provided on the logger screen. Leica TPS 1100 and TPS 1200 stream pseudo GGA message. Data acquisition is similar to GPS receivers. In most cases the Baud Rate parameter must be selected as 115,200 while working with Leica TPS 1200. Trimble RTS stream separate messages for each parameter. The NAV38MK2 interface requires that Trimble messages 37 (Northing), 38 (Easting), and optionally 39 (Elevation) must be used. Other Trimble labels can be used, however they are not used by the program and it is recommended that required labels (37, 38, and 39) are to be set as starting parameters in the Trimble streamed sequence.

COM Port

The number of serial port that is assigned to the GPS input. Available selections are from **COM1** to **COM 12** with the exception of COM6 (Figure 6.3). The program default is COM2. Communication parameters for the selected serial port can be determined in options described below.

This port must be different than a port specified in the Logger Setup menu for the EM38-MK2 input, otherwise a warning message will be displayed and ports will have to be reassigned.

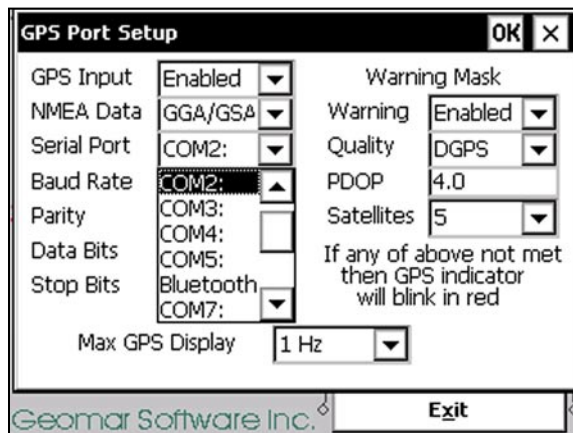


Figure 6.3: Selecting Serial Port for GPS input

Tapping on the down arrow next to the text box labeled Serial Port opens a drop-down box showing the available ports (Figure 6.3), or when the keyboard is used activate the text box by pressing TAB key and then by using up or down arrow keys select one of available items.

Port COM6 is named Bluetooth and it is assigned for Bluetooth communication. This type of connection can be used if GPS receiver is equipped with Bluetooth option. Please refer to GPS receiver manufacturer instructions. Procedure of detecting Bluetooth by the Allegro will be same as described in earlier in section 5.1.

Only one Bluetooth connection can be used by the Allegro operation system, therefore if Bluetooth connection is assigned for EM38-MK2 data acquisition then GPS receiver must use one of physical serial ports.

If Bluetooth communication is selected then all serial communication parameters described below are ignored by the program since they are adjusted automatically by the Allegro operating system.

Baud Rate

Specify Baud Rate for the output port, the entered value should much the Baud Rate of the GPS system, default is 9600.

Parity

Select Parity for the output port, the entered parameter should much the Parity set in the GPS serial port settings, default is N.

Data Bits

Specify Data Bits for the output port, the entered value should much settings in the GPS system, default is 8.

Stop Bits

Specify Stop Bits for the output port, the entered value should much settings in the GPS system, default is 1.

Max GPS Display (maximum update rate for real time display)

Two selections are available: 1 Hz or 2 Hz. This parameters determines frequency of the program display only.

When higher than 1 Hz or 2 Hz GPS rate is used by GPS receiver all GPS positions are saved in data files for later processing, however, in real time positions are updated at 1 Hz or 2 Hz (depending on the selection) rate.

It is strongly advised that even if your GPS receiver supports faster rates the 1 Hz update for GPS positions is used. NAV38MK2 will work with rates higher

than 1 Hz, however operation may not be smooth when scrolling and rescaling display while large amount of data is collected. The data processing program will interpolate all EM38-MK2 stations between GPS positions in the very similar way as GPS receiver in real time.

GPS Warning Mask Parameters

Warning

Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by navigating with Tab key and then by using Up or Down arrow keys select one of the available items: Enabled and Disabled.

This option allows you to Enable/Disable a GPS Warning Mask that contains three parameters: Quality Indicator (degree of differential corrections), Dilution Parameter (PDOP or other label depending on the selected NMEA message), and number of available satellites (Figure 6.4).

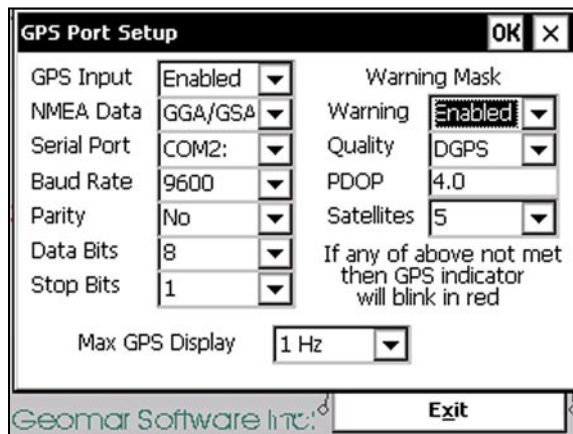


Figure 6.4: GPS Warning Mask section

When Enabled is chosen GPS two circle indicator will be alternating in green and white if conditions for specified parameters setting will be met. When any of the parameters is below set values then GPS indicators will alternate in red and white colours. In case Warning parameter is disabled then GPS indicator will be displayed in green and white colours regardless of GPS signal quality. All GPS data is logged, GPS Warning Mask affects only display.

Quality

This parameter describes Quality Indicator (degree of differential corrections). Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by navigating with Tab key and then by using Up or Down arrow keys select one of the available items: AGPS (Raw), DGPS, RTK3, RTK4, and RTK5.

If Quality Indicator received from GPS receiver will be worse than specified then GPS indicator will alternate in red and white colours.

If any future higher or proprietary Quality Indicator will be send by a GPS receiver it will be treated by the program as RTK5.

PDOP

This parameter can be labeled PDOP, HDOP, DOPG, DOP depending on the selected NMEA message. It can be also named Quality m (accuracy in meters) if LLQ was selected, or it is not available (labeled N/A) when messages GLL or Leica TPS are used.

Activate text box by tapping or using TAB key and then enter the chosen acceptable maximum value of Dilution parameter.

If PDOP (or other similar parameter) is larger than specified value then GPS indicator will alternate in red and white colours.

Satellites

Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by navigating with Tab key and then by using Up or Down arrow keys select one of the available items: 3 to 12 (Figure 6.5).

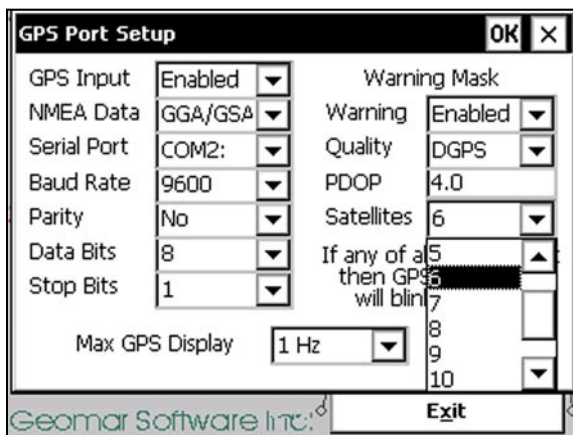


Figure 6.5: Selecting minimum number of satellites

If number of available satellites will be smaller than specified then GPS indicator will alternate in red and white colours.

After all the parameters in the Survey Setup dialog are updated tap the button **OK** or press **ENTER** key to accept the displayed settings. The program will return to the Main Screen. Updated settings will be written to the initial file and they will be given as default parameters in the subsequent Survey Setup dialog.

To return to original settings (state before this dialog was selected) tap **Cancel (X)** button or press **Esc** key. All parameters will be reset to initial settings and the program will return to the Main Screen.

6.2 Monitoring GPS Receiver Output

After the GPS Monitoring button was tapped (or executed from the keyboard) in the Main Screen the GPS Monitoring window appears. The window is divided into three parts. The largest, top portion of the screen displays the GPS receiver output. The middle portion displays recently send NMEA command (or default message) sent to the GPS receiver, and at the bottom, three buttons representing available options: Pause/Go, Send, and Exit. These buttons can be tapped, executed by TAB key and ENTER keys, or by using shortcuts (pressing underlined letter keys). This screen is shown in Figure 6.6. The monitoring mode will work regardless of the GPS Input being Enabled or Disabled in GPS Port Setup dialog.

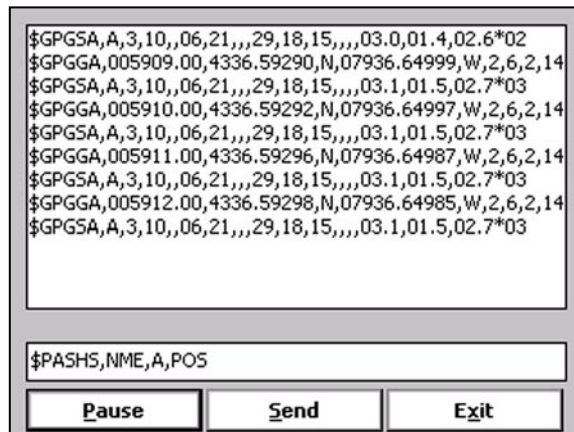


Figure 6.6: Monitoring GPS output in monitoring (terminal) mode

As soon as the NAV38MK2 screen is in terminal mode and the GPS is streaming data, the first portion of each message (limited by the screen width) will appear in the top portion of the display. The display is updated with the frequency the GPS receiver outputs data. This allows you to recognize the GPS update rate and type of messages being sent by the connected GPS. (Example in Figure 6.8 shows output of GPS receiver which sends three NMEA messages GGA, GSA, and POS, updated every second.) In cases where the GPS data is not received by the logger a message NO DATA and current time will appear in the top window of the display, as shown in Figure 6.7.

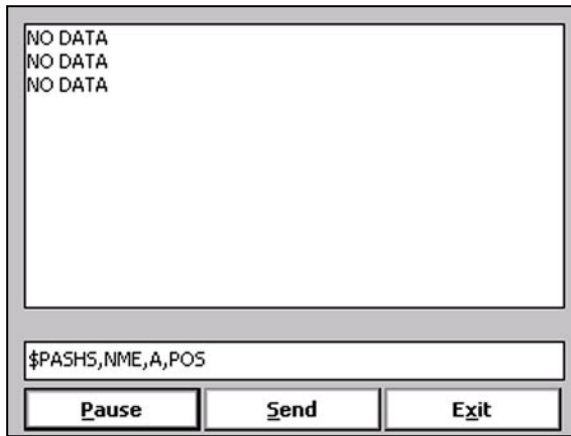


Figure 6.7: GPS Monitoring window when no GPS data is available

The message NO DATA is normally updated with a rate of 6 seconds. This indicates the following:

- serial port number not correctly specified in Set Port for GPS menu,
- the GPS receiver not sending any data,
- not connected or not working GPS receiver.

If the message is updated more often than 6 seconds (i.e. every 1 or 2 seconds) or the display does not show legible characters, it is possible that the GPS is working correctly and is connected to the proper serial port, however communication parameters are not specified correctly. In most cases the Baud Rate or Parity must be adjusted.

The NO DATA message may also appear if the GPS data are received correctly, but the GPS receiver was set to send data with a time interval longer than 6 seconds. In this case the NO DATA message will be displayed in between GPS messages. This indicates that the GPS is working correctly, however the operator should consider adjustment of the GPS receiver output update rate. Most high resolution geophysical surveys require positioning update of 1 or 2 seconds, and a 5 seconds interval can be used only when the survey is carried out at an even pace and along relatively straight survey lines.

The monitoring display can be paused any time by executing the command button **Pause**. At that time scrolling of the GPS output will be stopped, and the same command button will be labeled **Go** (Figure 6.8). The next pressing of this key will activate receiving and display of GPS data.

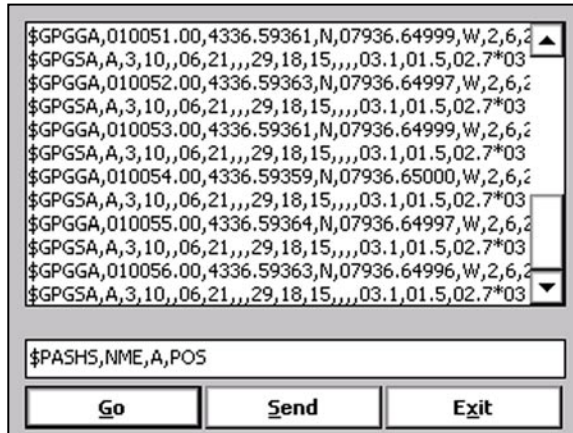


Figure 6.8: Paused monitoring screen

The button labeled **Send** allows you to send a NMEA command to the GPS receiver. It is preferable if the GPS receiver parameters are set using the GPS manufacturer software or controller (GPS logger or panel keys). However, **when the operator is familiar with NMEA protocol and structure of commands for a given GPS system**, this function can be very convenient and useful when the update rate and enabling or disabling messages in the data stream is required.

After the button **Send** is tapped a dialog titled GPS Message is displayed (Figure 6.9)

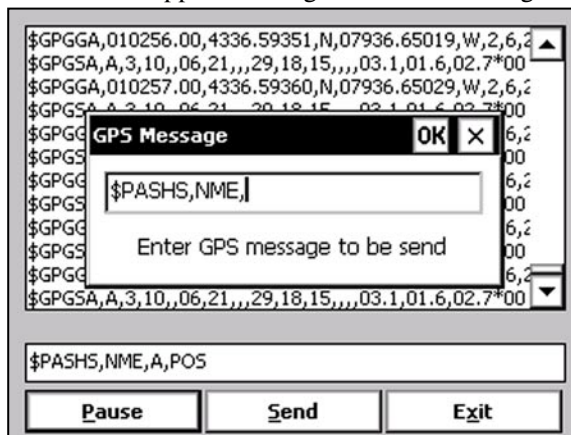


Figure 6.8: GPS Monitoring screen after button Send is executed

and the beginning of the standard NMEA command, **\$PASHS**, or the last entered command is displayed. After the entire NMEA command is typed in, tap **OK** button or press the key **<ENTER>** to send the command to the GPS receiver. Tapping **Cancel** button or pressing the **<Esc>** key will cancel the command and hide the NMEA Message dialog. An example of a command that will disable the NMEA message **POS** is given in Figure 6.10 (it is assumed that the GPS receiver output serial port is A).

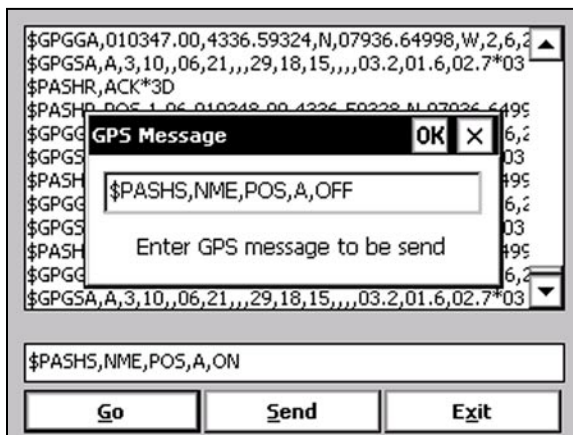


Figure 6.10: Example of the NMEA command entry

After this command is received by the GPS receiver, the confirmation message will be send by the receiver (**\$PASHR, ACK*3D**) and data stream will not contain the message **POS** (**\$PASHR, POS,.....**), as shown in Figure 6.11.

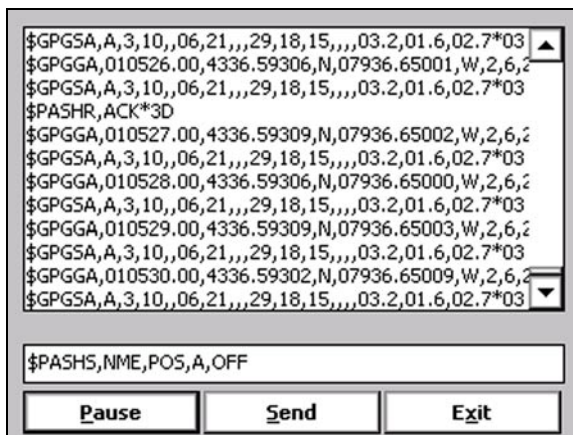


Figure 6.11: GPS Monitoring screen after NMEA command is sent

When the button **Send** is executed next time, the text of the former NMEA command is displayed in NMEA Command dialog. This text can be edited and send to GPS receiver by tapping the button **OK** in dialog window.

Please note, that not every GPS system accepts and uses the same standard set of NMEA commands and messages. In addition, some GPS systems do not accept commands sent by the serial port at all (i.e. Trimble ProXRS or ProXL). The configuration of these type of receivers can be updated only by the controlling device (usually GPS logger, controller, or the receiver panel keys). Please refer to the documentation of a given GPS system before using NMEA Command function.

Map & Profile Options

7

The Map Options GPS Port Setup dialog is used to specify plotting parameters for the navigation mode, mainly colours and size of cursor and positions, while the Profile Options dialog allows you to select profiles to be displayed, including colour as well as thickness of each profile separately.

7.1 Map Display Options

After the **Map Options** button was tapped (or executed from the keyboard) in the Main Screen the Map Display Options window appears on the screen (Figure 7.1).

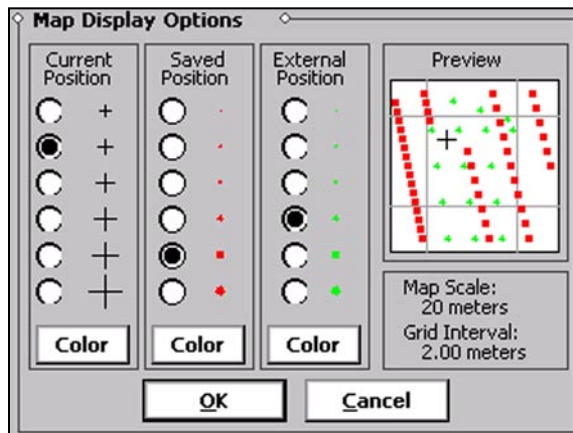


Figure 7.1: The Map Display Options window

This window is divided into 4 sections. The first three sections are used to specify size and colours of plotting parameters, while the fourth section, labeled Preview reflects entered changes in real time.

The first section from the left, labeled Current Position is used to set size and colour of the cursor indicating current position of the GPS antenna. The second section, labeled Saved Position allows you to specify size and colour of a dot marking saved GPS position on the map in Navigation mode. The third section, labeled External Position is very similar to the second section, it allows you to specify size and colour of dot used to

display positions of the External or ASCII files (only one type of file can be displayed at the same time).

The fourth section labeled Preview shows sample map with current settings (specified in the first three sections). It is updated in real time. Below the Preview window, an information about current map scale and map grid line intervals is displayed.

Size of Cursor and Position

Tapping on a radio button in any of three sections will select a size of Cursor or Dot as shown by a graphic image placed next to the radio button. The selection will be immediately reflected in the Preview window, as shown in Figure 7.2 (please compare with Figure 7.1).

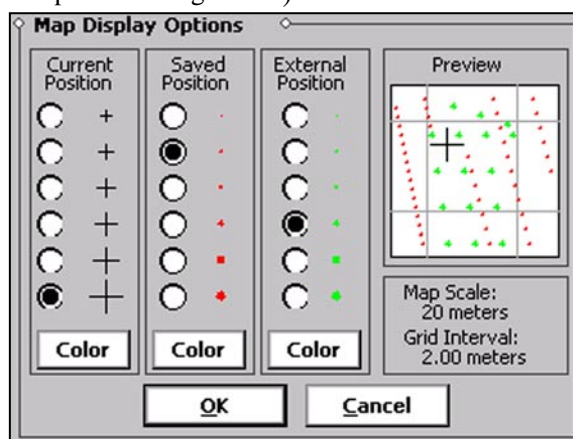


Figure 7.2: *Selecting size of Cursor and Position Dots in Map Display Options window*

Size of Cursor and Position dots shown in the Preview window will be used in Navigation mode during data collection. These parameters can be changed at any time during the survey.

Color

To change colour of the Current Position Cursor or Position dot click on the corresponding button labeled Color. The Color dialog will appear (Figure 7.3). Select desired colour by clicking on a colour box (the selected colour box will be highlighted). Other colours can be specified by clicking on the **Custom** button. The selected color will be used to plot corresponding parameter. Click on the button **OK** or press **ENTER** key (if highlighted) to accept the highlighted colour. The Color dialog will disappear and the colour of the selected parameter (Cursor or Position) will be updated in the Preview window. To cancel colour selection click on the **Cancel** (or X button) button or press **Esc** key.

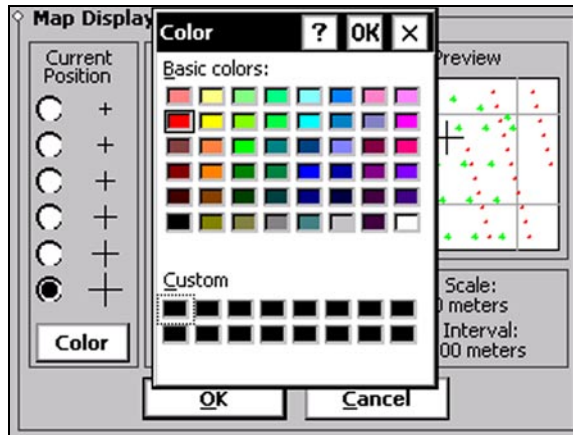


Figure 7.3: Selecting colour in Map Display Options window

Selected colours of Cursor and Position dots shown in the Preview window will be used in Navigation mode during data collection. Colour for each parameter can be changed later at any time during the survey.

After all the parameters in the Map Display Options window are updated tap the button **OK** or press **ENTER** key (if the button is highlighted) to accept the displayed settings. The program will return to the Main Screen. Updated settings will be written to the initial file and they will be given as default parameters in the subsequent Map Display Options windows.

To return to original settings (state before this window was displayed) tap **Cancel** button or press **Esc** key. All parameters will be reset to initial settings and the program will return to the Main Screen.

7.2 Profile Display Options

After the **Profile Options** button was tapped (or executed from the keyboard) in the Main Screen the Profile Display Options window appears on the screen. This window is used to specify plotting parameters for the program Profile View mode. The window allows you to enable and disable the display of each profile (component, dipole mode, and coil separation combination), to specify color and thickness of line representing each profile, and to select grid lines for conductivity or Inphase scale. The Profile Display Options window is presented in Figure 7.4.

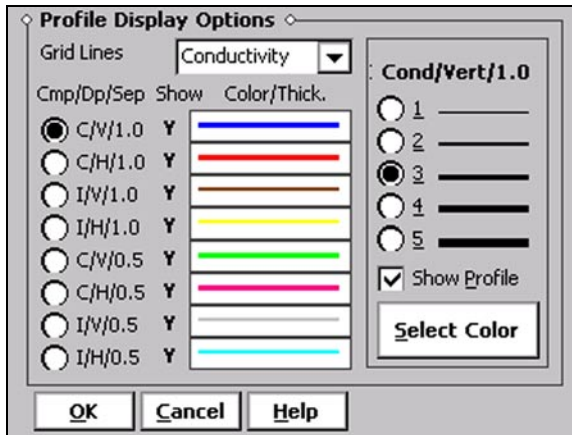


Figure 7.4: Profile Display Options window when Data Type C/V/1.0 is selected

To set parameters for any profile click on the radio button labeled **C/V/1.0** (Conductivity/Vertical dipole mode/1.0 m separation), **C/H/1.0** (Conductivity/Horizontal dipole mode/1.0 m separation), and so on. The state of radio buttons (on the left) is reflected by a section located in the right portion of the Profile Display Options. This section is labeled according to the left radio buttons selection (see Figures 7.4 and 7.5) and allows you to select profile line thickness, colour, and presence on the display. Compare Figures 7.4 and 7.5, the right section in Figure 7.5 is labeled Cond/Vert/1.0, while the same section in Figure 7.7 is labeled Inphase/Ver/1.0.

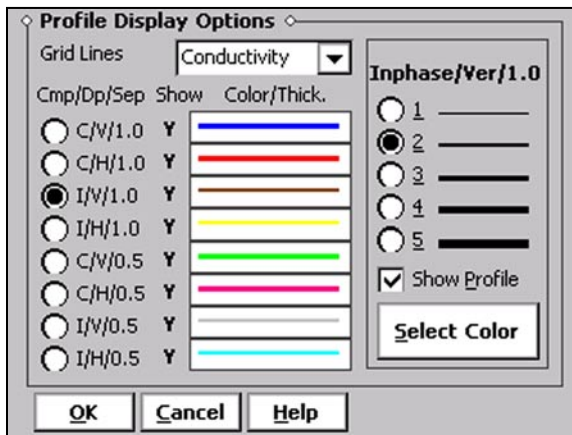


Figure 7.5: Profile Display Options window when profile I/V/1.0 is selected

Show Profile

A check box button labeled **Show Profile** is used to select or deselect particular profile. When check box is marked then a symbol **Y** is placed in column labeled Show, otherwise this symbol disappears (Figure 7.6, configuration I/H/1.0).

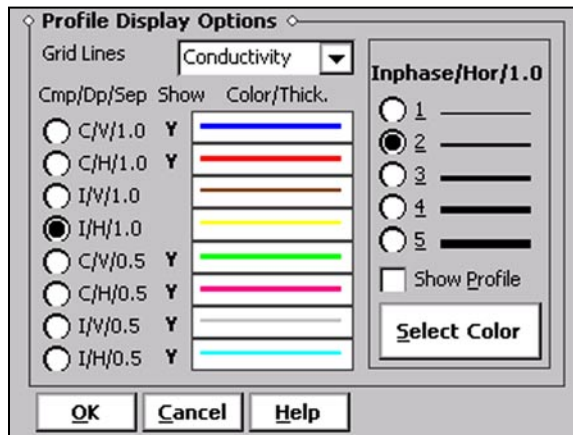


Figure 7.6: Profile Display Options window with deselected profiles I/V/1.0 and I/H/1.0

Select Thickness

To change thickness of the selected profile click on one of radio buttons labeled from 1 to 5 with at graphic samples of thickness. An example of the profile in one of white windows labeled Color/Thick will be updated in real time.

Select Color

To change color of the line click on the button labeled **Select Color**, a Color dialog (see Figure 7.7) will appear.

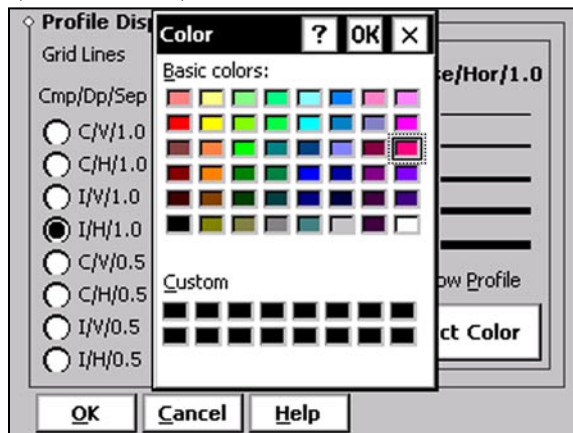


Figure 7.7: Selecting colours for profiles

Select desired colour by clicking on a colour box (the selected colour box will be highlighted). Other colours can be specified by clicking on the **Custom** button. The selected color will be used to plot corresponding parameter. Click on the button **OK** or press **ENTER** key (if highlighted) to accept the highlighted colour. The Color dialog will disappear and the colour of the selected parameter (Cursor or Position) will be updated in the Preview window. To cancel colour selection click on the **Cancel** (or X button) button or press **Esc** key. After color is selected a sample of profile (in column labeled Color/Thick.) will be updated immediately.

Grid Lines

Profiles for both components share the same graphic window, however each component has its own scale. This option allows you to select grid lines to be displayed (as thin grey lines) for conductivity or Inphase scale. Minimum and maximum values for the component with selected grid lines are displayed as bold numerals. See Figure 7.8 where grid lines are plotted for conductivity scale.

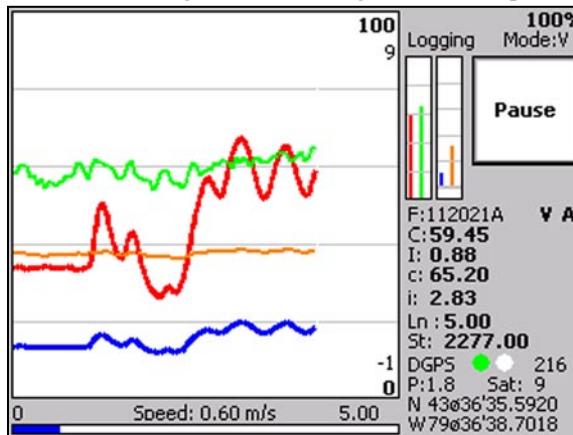


Figure 7.8: NAV38MK2 in Profile Display mode and conductivity scale grid lines

This option does not apply to moving bar windows where appropriate grid lines are always displayed for each component scale.

After all the parameters in the Profile Display Options window are updated tap button **OK** or press **ENTER** key to accept the displayed settings. The program will return to the Main Screen. Updated settings will be written to the initial file and they will be given as default parameters in the subsequent Profile Display Options.

To return to original settings (state before this dialog was selected) tap **Cancel** button or press **Esc** key. All parameters will be reset to initial settings and the window will disappear.

After the **Logging** button (in Main Screen) is tapped or executed by the keyboard, the program enters logging session and starts to read data from the connected EM38-MK2 and GPS receiver. Logging session contains three modes: Monitoring, Stand By and Log. Further each of these modes can use Navigation or Profile mode of the display. If the GPS Input is disabled then only the Profile mode is available. When the program starts in Navigation mode and less than 14,400 positions is available the message with info regarding maximum of number of GPS positions in the file is displayed (Figure 8.1). In most cases maximum number of positions (14,400) can be accommodated and the message will not appear. However, this number depends on the computer memory and may be smaller if used with other than Allegro CX field computer.

Program starts Logging session always in Monitoring mode and in Navigation display mode if GPS Input is enabled (Figure 8.1). In this mode EM38-MK2 and GPS readings can be quickly examined, and EM38-MK2 parameters (signal level, instrument configuration) can be adjusted. Stand By mode is similar to Monitoring mode, however different options are available. Recording of EM38-MK2 and GPS data is allowed only in Logging mode, which is accessible from Stand By mode. In general after the data file is created in the Monitoring mode, two modes Stand By and Logging are toggled by Start and Pause keys. In Stand By mode instrument outputs can be monitored and some survey parameters can be changed, and Logging mode is used only to record data.

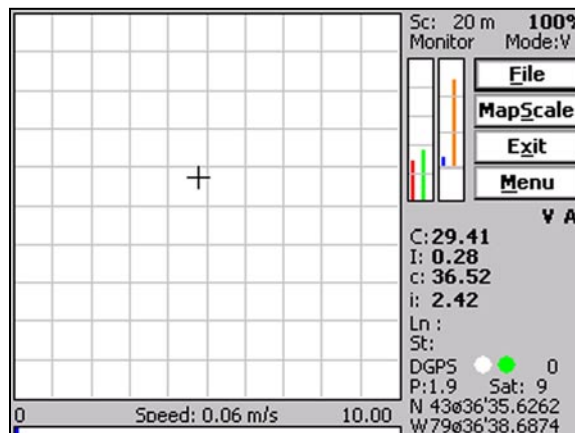


Figure 8.1: Initial NAV38MK2 Monitoring screen in Navigation mode

It is assumed that all settings, especially assignment of serial ports, are correctly specified and instrument is turned ON prior to using this option. In case the instrument is OFF or it is not connected to the field computer the message shown in Figure 8.2 will appear. This message will not appear if option EM38-MK2 in System Setup dialog is Disabled.

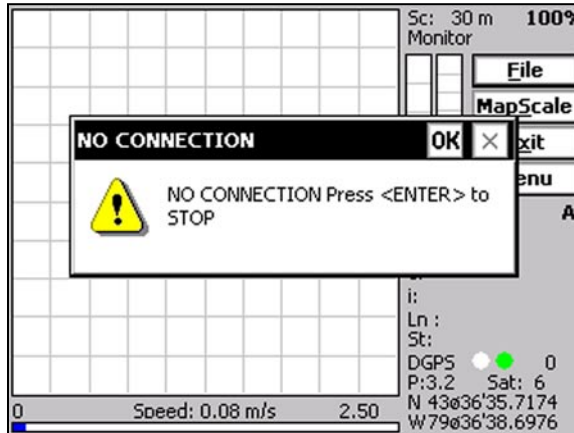


Figure 8.2: No Connection message in Navigation mode

Check program settings (Logger Setup), connection, or turn the instrument ON and select the Logging option again.

Assuming that instruments work properly the program will initialize connection with EM38-MK2 and a screen in Monitoring mode will be displayed.

8.1 Logging Screen Layout in Monitoring Mode

The NAV38MK2 Monitor mode allows initial inspection of the range of the instrument readings at the particular site, monitoring the instrument performance, component setting, monitoring number of available GPS satellites, GPS differential corrections, PDOP parameter status, and Latitude and Longitude coordinates. Speed bar located at the bottom of the screen shows current instrument speed (over the ground) which is calculated from GPS data.

The EM38-MK2 readings in Monitoring and Stand By modes are updated approximately 10 times per second during monitoring session. GPS positions are updated at a rate specified in GPS receiver, usually 1 second interval.

If GPS receiver streams data faster than at 1 Hz the RTmap38MK2 program will process and update display at 1 Hz or 2 Hz (depending on the selection in the GPS Port Setup dialog) in real time. However all GPS positions will be written to the data file and will be used later to position data in data processing program. Despite the fact that program will handle more than 1 Hz or 2 Hz GPS update it is strongly recommended that GPS receiver is set to 1 Hz update, faster data stream may affect program performance especially when high rate of EM38-MK2 is used. The data processing program interpolates EM38-MK2 position similarly to real time GPS interpolation.

Navigation Mode

When the GPS Input is Enabled in GPS Port Setup menu then the program displays the screen in Navigation mode by default. The NAV38MK2 Logging screen in Monitoring mode and Navigation display mode is shown below (Figure 8.3).

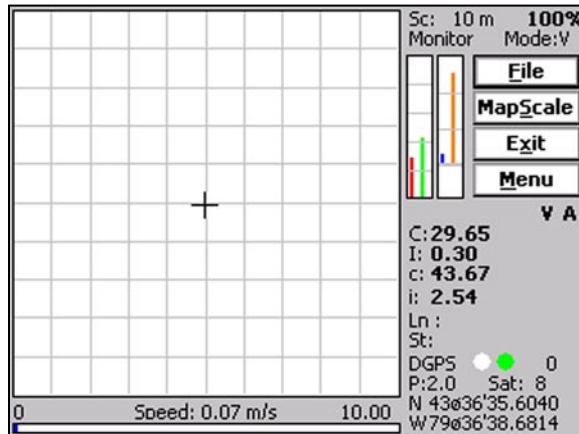


Figure 8.3: Logging screen in Monitoring (Navigation) mode

The left portion of the screen is occupied by the square plot area, a map, which presents current location of the system (based on GPS antenna position) in graphic form. This plot area will also display all recorded positions during data recording. The side of the square corresponds to scale which is displayed at the top line of the screen, right to the plot area. The scale can be given in meters or feet depending on Units selection in the Logger Setup menu. Figure 8.3 shows map area that represents square 20 x 20 m. A cross mark indicating current position of the GPS antenna (usually indicating position of the instrument) is always placed in the center of the map when logging session starts. After the operator will start moving the cross mark will move accordingly, however traces will not be plotted. Points indicating GPS stations are plotted only in Log mode when EM38-MK2 and GPS data are recorded. The North points to the top of the screen.

The Monitoring screen will display GPS related information in four bottom lines of the right portion of the display.

A label **DGPS** (Differential Global Positioning System) indicates that GPS readings are differentially corrected in real time, while label **AGPS** (Autonomous Global Positioning System) indicates lack of differential correction. Three other labels can be displayed: **RTK3** (Real Time Kinematic) when Quality Parameter is 3, and **RTK4** and **RTK5** for Quality parameters equal 4 or 5. On the right side of **DGPS**, **AGPS**, or **RTK** label two small circles are displayed. A colour of these circles should alternate between white and green with the frequency of GPS update rate (usually 1 second intervals), Figures 8.3 and 8.4. When GPS Warning Mask setting are not met then circles will be displayed in red and white colours. If the circle is displayed in one colour for long periods of time it means that the GPS system is not working or that it is not connected to the serial port. The next label **P** with a value varying between 0 and 99.9 represents an index called Position Dilution of Precision (**PDOP**). PDOP is given when NMEA data messages GGA/GSA, GGK or POS were selected. If only message GGA is available, then index HDOP (labeled **H**) will be displayed, and when LLK message was selected parameter GDOP (labeled **G**) is displayed. The LLQ message will provide precision of positioning in meters and it is labeled by **X**. Refer to section 6 (Set Port for GPS), Appendix A, and to GPS manuals for more information about GPS parameters.

The label **Sat** and following number shows number of currently tracked satellites. Latitude (**N**) and Longitude (**W**) are displayed in two bottom lines. These values are given in degrees, minutes, and seconds with four decimal places.

The remaining portion of the monitoring screen display available options and parameters associated with the EM38-MK2 output. The EM38-MK2 output is represented by two small bar windows that include four (or two if EM38-MK2-1 is used) moving vertical bars. The left bar window represents Conductivity readings, and the second bar window shows Inphase response. The first (left) bar in each window represents component (conductivity in the left and Inphase in the right window) reading for coils separation 1 m, and the second bar shows component reading for coils separation 0.5 m. Displayed moving bars and their colors correspond to current dipole mode, when dipole mode changes then one set of bars will disappear and another set of moving bars will be displayed, with selection of colors corresponding to measured dipole mode. Bar colours correspond to selection of colours for profiles specified in Profile Options dialog. Range of readings displayed in this grid can be adjusted (option Profile Scale), however grid window with moving bars is not labeled. The scale for graphic bars is divided by four or five grey grid lines. In the case where the amplitude scale starts with a negative value, then the grid line corresponding to zero is always plotted as a thicker grey line. This type of graphic presentation allows the operator for very easy and quick monitoring the response of the connected instrument.

Readings for all channels (component/coil separation combination) are shown in numeric form below the grid with moving bars area. Data for displayed channels are labeled **C**, **I**, **c**, and **i** correspondingly. Please note that upper case characters represent coils separation 1 m, and lower case labels indicate coils separation 0.5 m. Dipole mode is indicated by a label **V** (Vertical Dipole mode) or **H** (Horizontal Dipole mode) displayed under set of five command buttons. Due to the small screen of the field computer, units of readings are not labeled, they are given in mS/m (conductivity) and ppt (Inphase). Fiducial marker is represented by label **M**. Label **M** is displayed only when the marker is actually pressed by the operator.

Several other parameters are shown on the right side of map plot area. Label **Monitor** indicates Monitoring mode. Labels **Stand By** and **Logging** will be displayed for Stand By and Log modes respectively. Labels **Ln** (line name), **St** (current station) and corresponding parameters are not used in Monitoring mode. Label **A** displayed at the right edge, under moving bars indicates current Instrument Mode Auto, which can be also set to **M** (Manual) mode.

Four command buttons (on the right side of the grid containing moving bars) provide access to options available in Monitoring mode. These options are described below in the section 8.2.

Profile Mode

When the GPS Input is Disabled in GPS Port Setup dialog then the program displays the screen in Profile mode. The same mode is displayed when GPS was Enabled and the operator used Toggle option to display program in Profile mode. The NAV38MK2 Logging screen in Monitoring mode and Profile display mode is shown below (Figure 8.4).

The left portion of the screen is occupied by the square plot area that will contain profile curves for each recorded and selected (in Profile Options window) EM38-MK2 channels in graphic form. Scale is labeled at the top and bottom on the right side of the plot. Outside labels (at the very top and bottom) correspond to Conductivity range, and inside labels reflect range of Inphase. Labels displayed in bold font indicate whether grey grid line correspond to Conductivity or Inphase scale.

The EM38-MK2 output is also represented by two small grid windows, each including two moving vertical bars. If the EM38-MK2-1 is used then each window contains only one bar. The left bar window represents Conductivity readings, and the second bar window shows Inphase response. The first (left) bar in each window represents component (conductivity in the left and Inphase in the right window) reading for coils separation 1 m, and the second bar shows component reading for coils separation 0.5 m.

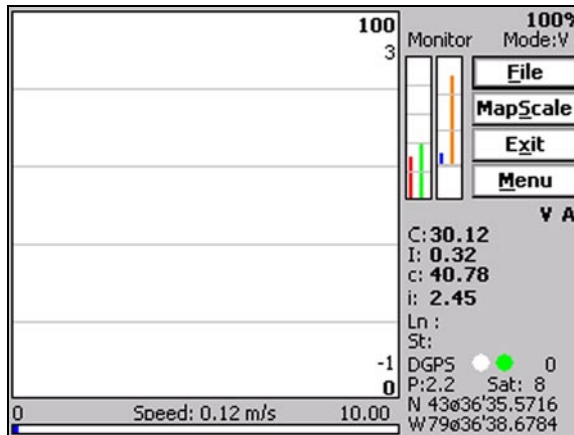


Figure 8.4: Logging screen in Monitoring (Profile) mode

Displayed moving bars and their colors correspond to current dipole mode, when dipole mode changes then one set of bars will disappear and another set of moving bars will be displayed, with selection of colors corresponding to measured dipole mode. Bar colours correspond to selection of colours for profiles specified in Profile Options dialog. Range of readings displayed in this grid can be adjusted (option Profile Scale), however grid window with moving bars is not labeled. The scale for graphic bars is divided by four or five grey grid lines. In the case where the amplitude scale starts with a negative value, then the grid line corresponding to zero is always plotted as a thicker grey line. This type of graphic presentation allows the operator for very easy and quick monitoring the response of the connected instrument.

Readings for all channels (component/coil separation combination) are shown in numeric form below the grid with moving bars area. Data for displayed channels are labeled **C**, **I**, **c**, and **i** correspondingly. Please note that upper case characters represent coils separation 1 m, and lower case labels indicate coils separation 0.5 m. Dipole mode is indicated by a label **V** (Vertical Dipole mode) or **H** (Horizontal Dipole mode) displayed under set of five command buttons. Due to the small screen of the field computer, units of readings are not labeled, they are given in mS/m (conductivity) and ppt (Inphase). Fiducial marker is represented by label **M**. Label **M** is displayed only when the marker is actually pressed by the operator.

The grid with moving vertical bars and data displayed in numeric form are updated approximately 10 times per second in Monitoring and Stand By modes. Profiles are plotted only in Logging mode when readings are actually recorded in data file.

Several other parameters are shown on the right side of map plot area. Label **Monitoring** indicates Monitoring mode. Labels **Stand By** and **Logging** will be displayed for Stand By and Log modes respectively. Labels **Ln** (line name), **St** (current station) and corresponding parameters are not used in Monitoring mode. Label **A** (Auto) displayed at the right edge, under moving bars indicates current Instrument Mode, which can be also set to **M** (Manual) modes.

If a working GPS system is connected to the field computer and GPS was **Enabled** in the GPS Port Setup menu the Monitoring screen will display GPS related information in four lines of the right portion of the display.

A label **DGPS** (Differential Global Positioning System) indicates that GPS readings are differentially corrected in real time, while label **AGPS** (Autonomous Global Positioning System) indicates lack of differential correction. Three other labels can be displayed: **RTK3** (Real Time Kinematic) when Quality Parameter is 3, and **RTK4** and **RTK5** for Quality parameters equal 4 or 5. On the right side of **DGPS**, **AGPS**, or **RTK** label two small circles are displayed. A colour of these circles should alternate between white and green with the frequency of GPS update rate (usually 1 second intervals), Figures 8.3 and 8.4. When GPS Warning Mask setting are not met then circles will be displayed in red and white colours. If the circle is displayed in one colour for long periods of time it means that the GPS system is not working or that it is not connected to the field computer.

The next label **P** with a value varying between 0 and 99.9 represents an index called Position Dilution of Precision (**PDOP**). PDOP is given when NMEA data messages GGA/GSA, GSK or POS were selected. If only message GGA is available, then index HDOP (labeled **H**) will be displayed, and when LLK message was selected parameter GDOP (labeled **G**) is displayed. The LLQ message will provide precision of positioning in meters and it is labeled by **X**. Refer to section 6 (GPS Port Setup), Appendix A, and to GPS manuals for more information about GPS parameters.

The label **Sat** and following number shows number of currently tracked satellites. Latitude (N) and Longitude (W) are displayed in two bottom lines. These values are given in degrees, minutes, and seconds with four decimal places.

When GPS was Disabled in the GPS Port Setup dialog then instead of GPS information a label GPS Disabled is displayed. In such case the Navigation mode is not available and the program will work only in Profile mode.

Four command buttons (on the right side of the grid containing moving bars) provide access to options available in Monitoring mode. These options are described below in the section 8.2.

8.2 Options Available in Monitoring Mode

Several options are available while the Logging window is in the Monitoring mode. Four frequently used options can be accessed directly from command buttons and others can be used from pop up menu activated by the button **Menu** (displayed in Figure 8.5). Command buttons can be used by tapping on the desired button, or from the keyboard by pressing one of the shortcut keys (underlined characters on button labels) or by navigating using **TAB** key (sets button as a default button - default button is highlighted) and pressing **ENTER** key.

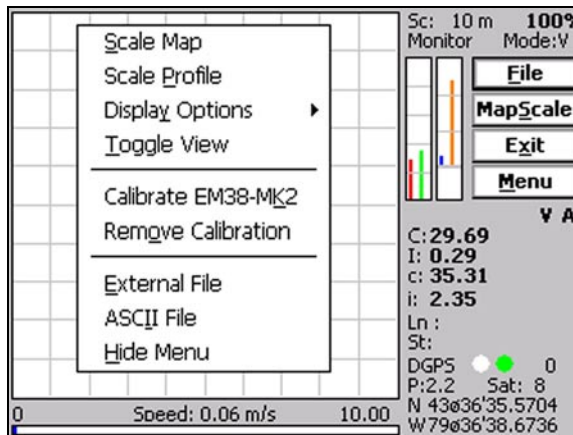


Figure 8.5: Logging screen in Monitoring mode with displayed pop up menu

Options listed in the menu can be accessed directly (without displaying pop up menu from Menu button) by using keyboard shortcuts, i.e. pressing key **P** will display Profile Scale dialog. While menu is displayed options can be selected by tapping on the appropriate item, or from the keyboard by pressing the shortcut keys or by navigating using **Up** and **Down** arrow keys and executing by **ENTER**.

File (create data file)

After a data file is created the program will switch to Stand By mode automatically.

The data file can be created in the given default directory (DATANAV38MK2) or in any other directory in the Allegro CX as long as it is located in C_Drive or in user supplied Storage_Card (see System Setup dialog). The C_Drive represents save, non volatile memory.

The name of the file is given by the field computer clock and it consists of month (2 digits), day (2 digits), hour (2 digits), and one alphabetic character A,

B, C, etc. (If all letters during one hour are used the name can be overwritten by the operator). The Create Data File dialog is presented in Figure 8.6.

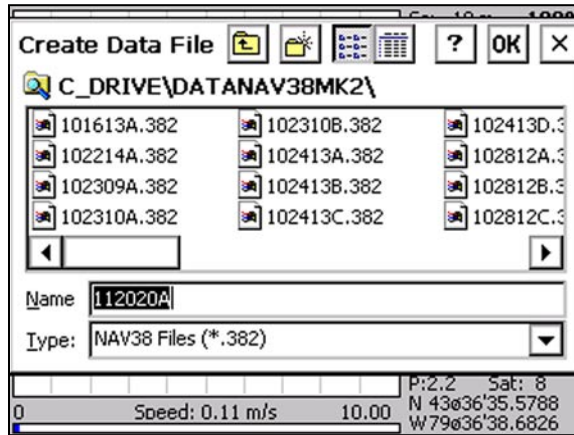


Figure 8.6: Create Data File dialog

The file name can be specified in the Create Data File dialog using the Windows standard interface procedure. The EM38-MK2 data files cannot be appended.

Each data file in the field computer created by NAV38MK2 has an extension name 382 (unless it is GXY file created when EM38-MK2 was Disabled in the System Setup window). The **382** data files are in binary format. Their content can be viewed when loaded to TrackMaker38MK2 program. These files can be also converted to ASCII format, or to Geonics DAT38MK2 (M38) format. Files in Geonics G38 format can later be viewed and processed in the Geonics program DAT38MK2.

After the file is specified tap the button **OK** or press **ENTER** key to accept and create data file. The program will switch Monitor mode to Stand By mode and the data file will be displayed on the screen.

To cancel selection and return to Monitoring mode tap the **Cancel (X)** button or press **Esc** key.

When a data file is created the program will switch to Stand By mode automatically (see section 8.3).

Map Scale

This option is available by tapping on the command button labeled **Map Scale**, from pop up menu (accessible from **Menu** button), or directly from keyboard by using shortcut key **S**. The Enter Map Scale dialog will appear on the screen, Figure 8.7.

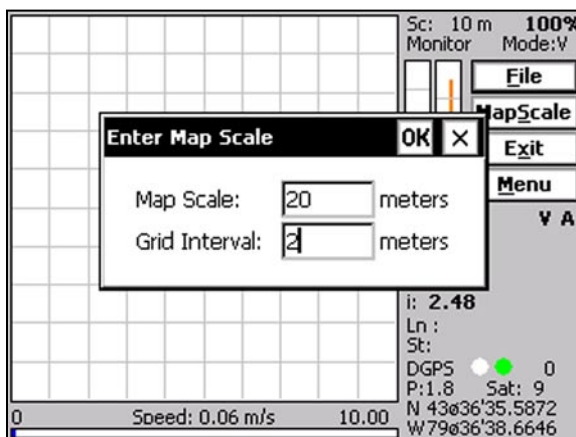


Figure 8.7: Enter Map Scale dialog

This dialog allows the operator to enter new scale for the map displayed by the plot area. Value is entered either in meters or feet according to selected units in Logger Setup dialog and it represents side of the square map. Only positive integer values ranging between 1 and 9999 are allowed by the program.

The second parameter in the Enter Map Scale is Grid Interval. These are grey grid lines in Navigation mode which may be helpful in estimation of distance on the map displayed in Navigation mode. Maximum number of grid lines is 20 in one direction, therefore for the maps scale 20 m the minimum grid interval is 1 meter. The program will recalculate grid interval in case too large scale will be entered. Setting Grid Interval to zero will not plot any grid lines on the screen.

After the file is specified tap the button **OK** or press **ENTER** key to accept and create data file. The program will switch Monitor mode to Stand By mode and the data file will be displayed on the screen.

To cancel selection and return to Monitoring mode tap the **Cancel (X)** button or press **Esc** key.

Profile Scale

This option is available from pop up menu (accessible by tapping the **Menu** button), or directly from keyboard by using shortcut key **P**. The Enter Profile/Bar Scale dialog will appear on the screen, Figure 8.8.

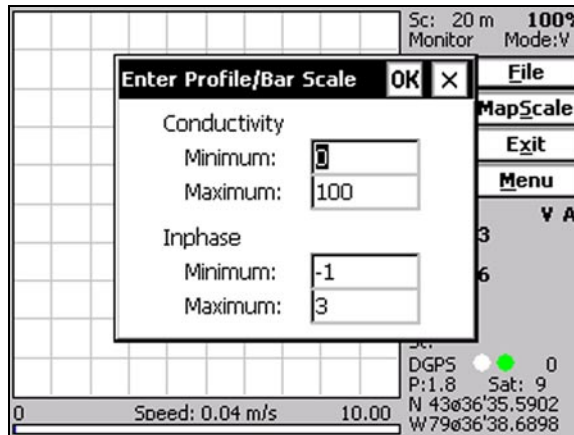


Figure 8.8: Enter Profile and Bar Scale dialog

Minimum and maximum values can be specified for the plot range of each component (conductivity and Inphase) in grid windows each containing two moving bars as well as for the profile plot display if the Monitoring screen is in Profile display mode. Therefore range of displayed data is the same for the profile display area and for the grid area with vertical bars. However only profile plot area is labeled at its right side (Figure 8.9).

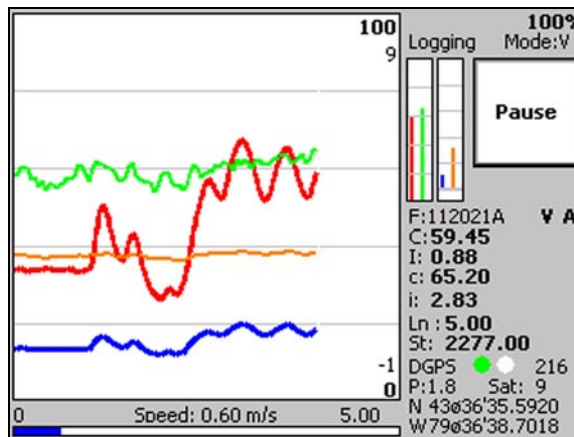


Figure 8.9: NAV38MK2 display in Profile mode

After minimum and maximum values for each component are specified tap the button **OK** or press **ENTER** key to accept new values and the display will be redrawn. To cancel selection tap the **Cancel (X)** button or press **Esc** key.

Display Options (Map Options, Profile Options, Speed Bar, GPS Warning)

The Display Options item has four submenus. These are Map, Profile, Speed Bar, and GPS Warning, Figure 8.10. Items Map and Profiles are identical to Map Display Options and Profile Display Options described in detail in Chapter 7. They can be accessed from pop up menu or directly by the keyboard pressing **A** or **R** keys.

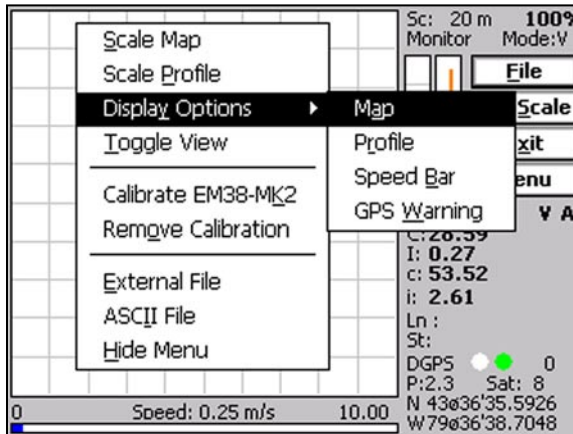


Figure 8.10: Extended pop up menu

Scale Speed Bar (adjust scale for speed bar)

The minimum value for the Speed Bar is preset to 0, therefore this scale requires only entry for the maximum speed. The Speed Bar Scale is given in Figure 8.11.

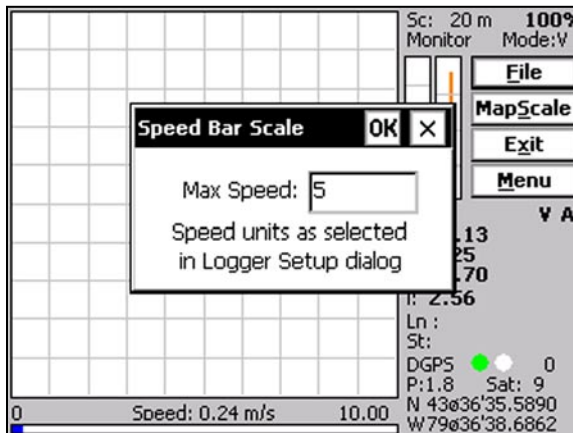


Figure 8.11: Speed Bar Scale dialog

The entered scale applies only to graphic representation of the speed (graphic bar), speed in numeric form is always displayed above the bar, even if the real value exceeded maximum specified for the speed bar. After the maximum value for the speed bar is specified tap the button **OK** or press **ENTER** key to accept new values and the display will be re-drawn. To cancel selection tap the **Cancel (X)** button or press **Esc** key.

GPS Warning (GPS Warning Mask)

This dialog allows to set or change GPS Warning Mask parameters during logging session. The same parameters can be set in GPS Port Setup dialog (see chapter 6). The GPS Warning Mask dialog is presented below in Figure 8.12.

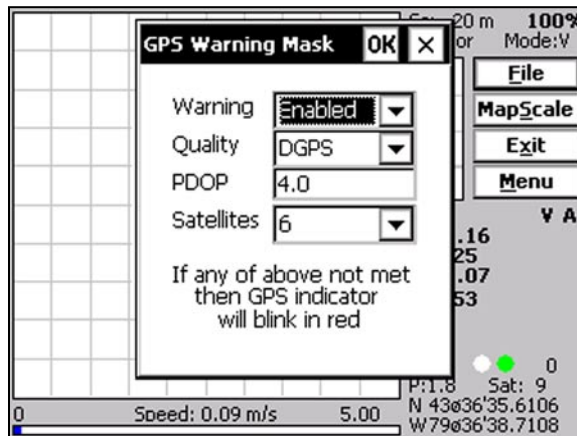


Figure 8.12: GPS Warning Mask dialog

Parameters in GPS Warning Mask are described below.

Warning

Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by navigating with Tab key and then by using Up or Down arrow keys select one of the available items: Enabled and Disabled. This option allows you to Enable/Disable a GPS Warning Mask that contains three parameters: Quality Indicator (degree of differential corrections), Dilution Parameter (PDOP or other label depending on the selected NMEA message), and number of available satellites. When Enabled is chosen GPS two circle indicator will be alternating in green and white if conditions for specified parameters setting will be

met. When any of the parameters is below set values then GPS indicators will alternate in red and white colours. In case Warning parameter is disabled then GPS indicator will be displayed in green and white colours regardless of GPS signal quality.

All GPS data is logged, GPS Warning Mask affects only display.

Quality

This parameter describes Quality Indicator (degree of differential corrections). Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by navigating with Tab key and then by using Up or Down arrow keys select one of the available items: AGPS (Raw), DGPS, RTK3, RTK4, and RTK5.

If Quality Indicator received from GPS receiver will be worse than specified then GPS indicator will alternate in red and white colours.

PDOP

This parameter can be labeled PDOP, HDOP, DOPG, DOP depending on the selected NMEA message. It can be also named Quality m (accuracy in meters) if LLQ was selected, or it is not available (labeled N/A) when messages GLL or Leica TPS are used.

Activate text box by tapping or using TAB key and then enter the chosen acceptable maximum value of Dilution parameter.

If PDOP (or other similar parameter) is larger than specified value then GPS indicator will alternate in red and white colours.

Satellites

Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by navigating with Tab key and then by using Up or Down arrow keys select one of the available items: 3 to 12.

If number of available satellites will be smaller than specified then GPS indicator will alternate in red and white colours.

After all the parameters in the GPS Warning Mask dialog are updated tap the button **OK** or press **ENTER** key to accept the displayed settings. Updated settings will be written to the initial file and they will be given as default parameters in the subsequent GPS Warning Mask and GPS Port Setup dialogs. To return to original settings (state before this dialog was selected) tap **Cancel** (X) button or press **Esc** key. All parameters will be reset to initial settings.

Toggle View (toggle between Navigation and Profile modes)

Selecting this item from pop up menu or simply pressing the key **T** will switch Monitoring or Stand By screens between Profile and Navigation modes. Changing the display from Profile to Navigation mode may take several seconds (depending on number of positions displayed and map scale). The program will display message **WAIT** till all positions are plotted in current map area and it will beep at the end of this process.

Calibrate EM38-MK2 (*automatic calibration of EM38-MK2*)

This option (Figure 8.13) allows you to calibrate EM38-MK2 using automatic, software based method. Calibration procedure is the same as described in the EM38-MK2 Operating Manual however here all the procedure is controlled by the program NAV38MK2. During Calibration the program calculates proper factors for conductivity and Inphase at each coil separation and dipole mode.

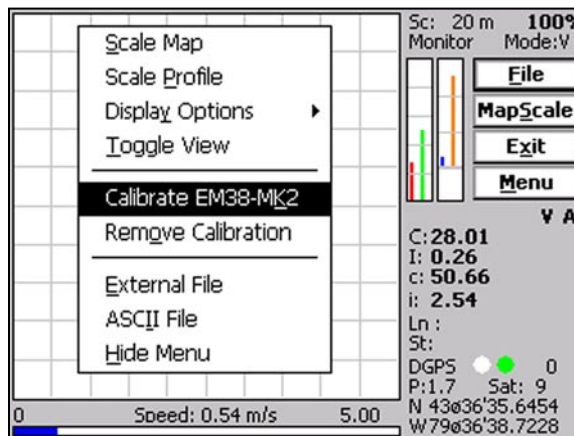


Figure 8.13: NAV38MK2 menu with selected Calibrate EM38-MK2 item

These values are saved in the Allegro CX memory as long as option **Remove Calibration** is not executed or a new version of the program is transferred to Allegro. It is recommended to perform Calibration at least once a day, after each battery change, when survey site is changed, etc. Calibration can be performed in Monitoring mode as well as later during logging session in Standby mode. Software based calibration that employs mono pod supplied by Geonics is very easy, fast, and has several advantages:

- 1) it is relatively uniform and it does not depend on operator since height above the ground is determined by mono pod.
- 2) it is very time efficient and easy to perform
- 3) all calibration factors are saved in Allegro memory and are written in data file in every survey line header

4) procedure can be traced later for any data set. If Calibration is performed during logging session new and old calibration factors are written to data file.

After the item is selected from pop up menu or from the keyboard (by pressing the **K** key) a message is displayed (Figure 8.14).

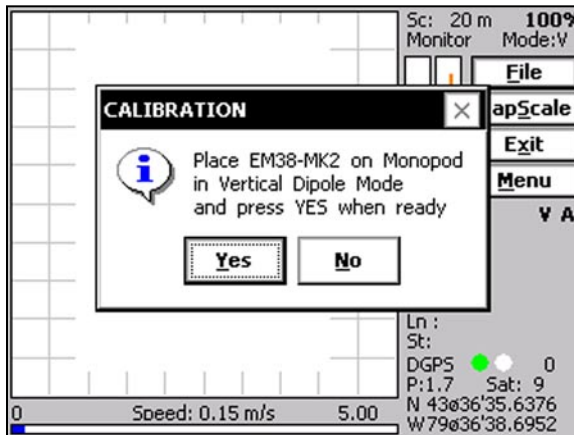


Figure 8.14: Message before Calibration

After the instrument is placed on the mono pod in Vertical dipole mode tap button **Yes** or press key **Y** (or **Enter** if button is highlighted). After button **Yes** was tapped a messages box disappears and a prompt **Vertical Calibration** is displayed (Figure 8.15). From now on all messages and prompts will be written under plot section of the screen, in a line that is normally used to display GPS parameters.

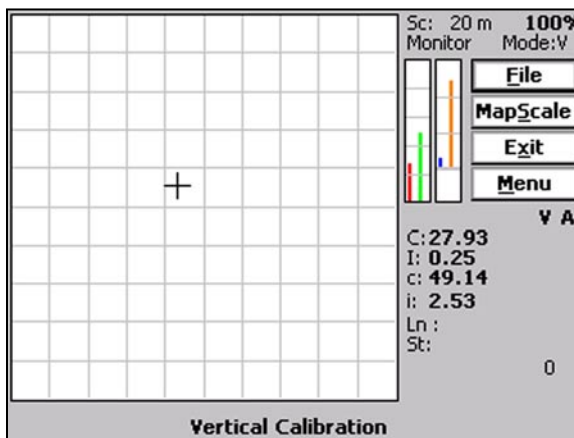


Figure 8.15: Vertical Calibration message

After Vertical calibration is completed (usually few seconds) the program will beep and a message **Rotate to Horizontal mode within 60 seconds** will appear (Figure 8.16).

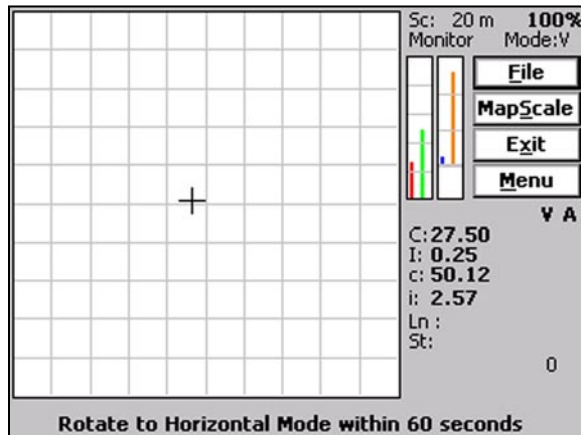


Figure 8.16: Message prompting to set the EM38-MK2 in Horizontal Dipole mode

In cases where rotating the instrument takes longer than 1 minute the program will display the message **Horizontal Mode Failed - Wait for Beep**, and after a short delay (about 2 seconds) the program will return to normal operation. The program monitors instrument orientation and as soon as it detects that the EM38-MK2 is in proper position it will display the following message shown in Figure 8.17, **Preparing for Horizontal Calibration** and after a small delay

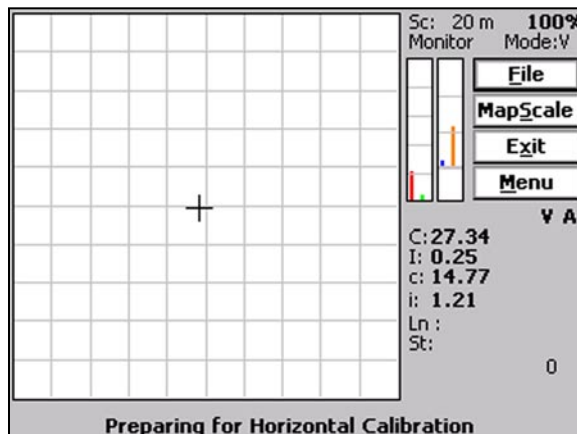


Figure 8.17: Preparing for Horizontal Calibration message

required for stabilization of the instrument the **Horizontal Calibration** will be performed (Figure 8.18).

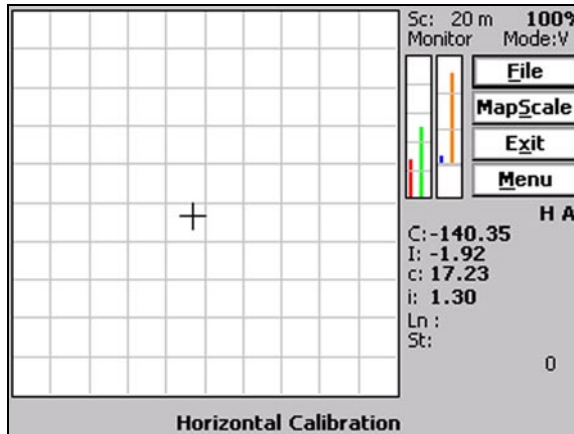


Figure 8.18: Horizontal Calibration message

If for any reason the calibration is not successful a proper message will be displayed.

Horizontal calibration takes normally 2 seconds and when the procedure is completed a confirmation message will be displayed (Figure 8.19).

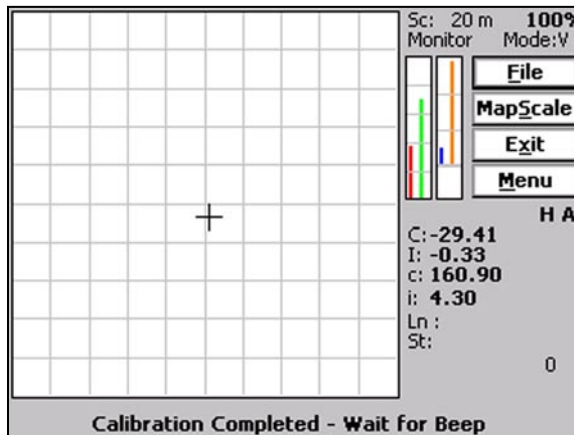


Figure 8.19: Calibration Completed message

After beep the above message disappears and program returns to normal operation. All calibration factors are saved in Allegro CX memory and will be used in consecutive program runnings. Unless a new version of the program is loaded the only possibility to delete (or reset to zero) calibration factors is using option Remove Calibration.

When calibration factors are used readings shown on the Allegro CX display usually differ from values displayed by the instrument console. To obtain same readings on the instrument console and on the Allegro CX display please use Delete Calibration option and then Calibrate again.

Remove Calibration (Delete Calibration factors)

After the item **Remove Calibration** is selected from pop up menu or from the keyboard (by pressing the **O** key) the program immediately displays confirmation message, Figure 8.20.

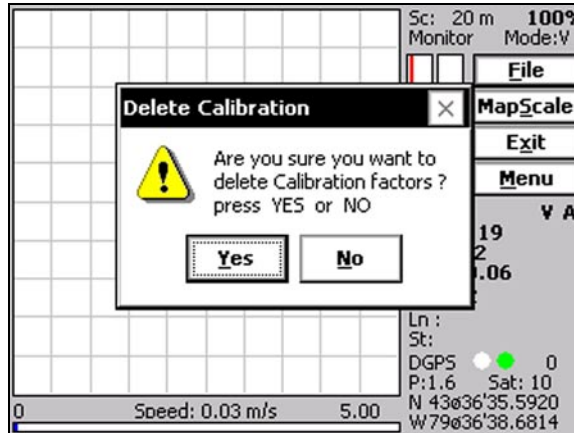


Figure 8.20: Confirmation message before removing Calibration factors

Please confirm by tapping button **Yes**, or pressing Key **Y** or Enter (if button **Yes** is highlighted) to delete (reset) calibration factors. After this is done readings displayed by the instrument console and Allegro should be similar.

If this option was used by accident please tap button labeled **No** and all calibration factors will remain the same.

External File (External TrackMaker Data or GXY File entry)

This option allows to display GPS positions from formerly acquired data file. Files created with NAV38MK2, as well as data or GXY files created with any other Geomar data acquisition programs (i.e. NAV31, RTmap38, ML61, etc.) can be entered. This option is useful in cases where the operator wants to review the coverage of the surveyed area, to find the last station surveyed in a previous day, cover an area already surveyed with different Geonics instrument, or simply to increase density of stations in previously surveyed area.

After the item is selected from pop up menu or from the keyboard (by pressing the **E** key) the standard window dialog Open File is displayed (Figure 8.21). File

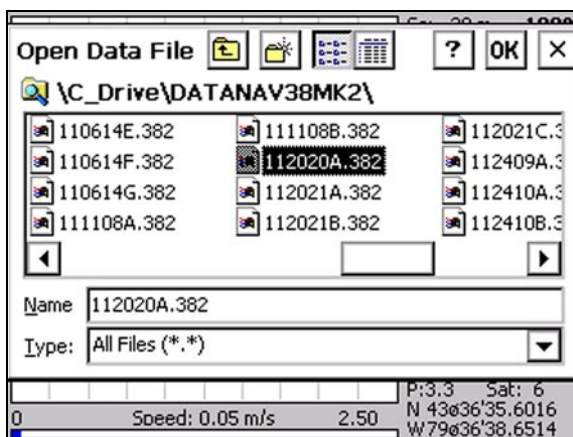


Figure 8.21: Open External File dialog

name must include extension file name (i.e. H38, N61, GXY, etc.). Specify file name using the Windows standard interface procedure.

After the file is selected a message with number of positions in the file will be displayed. At the same time depending on the available memory the program will provide a number of positions that will be displayed (Figure 8.22). If all positions can not be displayed, then the program will plot every second, or third (and so on) GPS position, however the first and last stations recorded in the file will be always plotted.

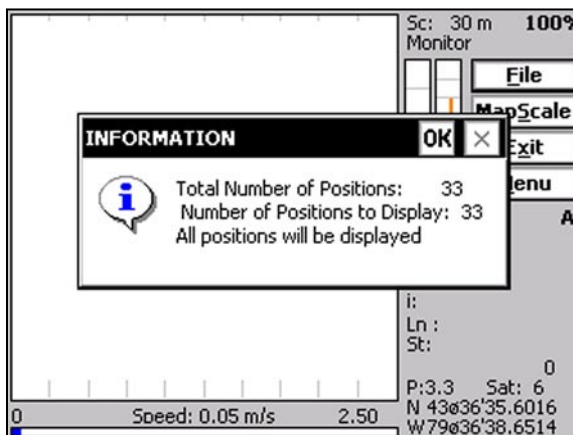


Figure 8.22: Number of Positions to be displayed

After confirming this message by tapping the button **OK** or pressing **ENTER** key the program starts to display positions recorded in the entered file. This operation can take several seconds depending on the file size and scale of the map

area. Therefore message labeled WAIT located at the right side of plot area will remain till all positions are displayed. In addition a beep will signal the end of plotting. Layout of GPS stations recorded in the entered data file at scale 30 m is presented in Figure 8.23.

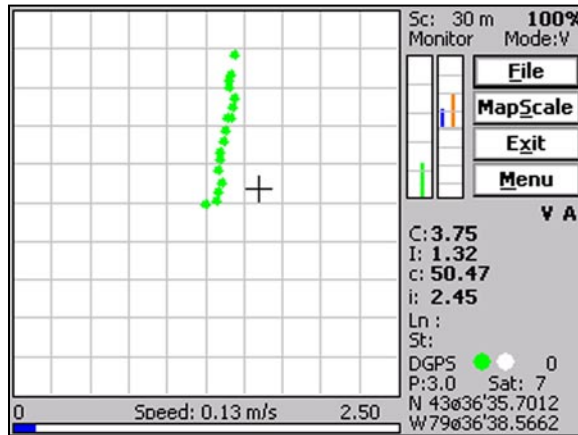


Figure 8.23: Layout of GPS positions from the external file plotted at map scale 30 m

The cross mark indicating position of the system is still approximately in the central position. Positions from external file are always related to the location of GPS when the program (its Logging portion) was started. In order to see more positions in the example in Figure 8.23 the operator can walk N-E or the scale can be changed.

Since only one external file or one ASCII file can be entered the pop up menu will contain item Remove External File (or Remove ASCII file if ASCII file was loaded), Figure 8.24. Tap this item (or use the arrow and ENTER key) to remove the external file from the display and from the program's memory. If the keyboard is used then the key **E** can act as a toggle to load and remove external data file.

ASCII File (External data in ASCII text format)

This option of NAV38MK2 allows you to display GPS positions from processed data formatted in ASCII text files organized in comma or space delimited columns. Such files can contain positions of anomalies or targets located during interpretation. Positions can be exported while using Oasis or other mapping software. In Geosoft this type of files can be easily created by using Digitize function. The only condition is that positions should be saved (or converted) to GPS native coordinate system - Geodetic coordinates (Latitude/Longitude) in WGS1984.

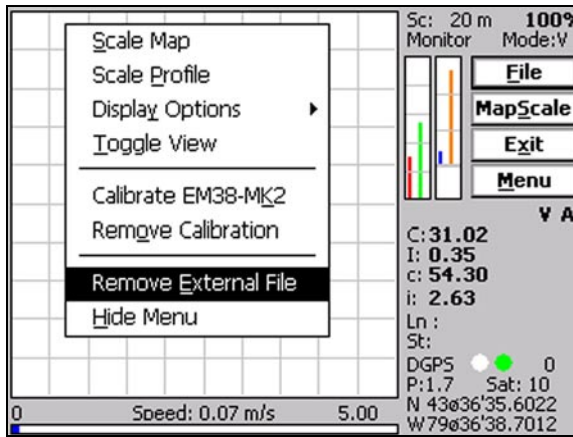


Figure 8.24: Pop up menu with Remove External File item

This program feature is useful in cases where the operator wants to locate previously located anomalies, navigate toward any features of known coordinates, or to increase density of stations in vicinity of previously detected targets.

After the pop up menu item ASCII File is tapped or executed from the keyboard (either by navigating with arrow keys or by pressing the I key) the standard Windows Open File dialog is displayed (Figure 8.17). File name must include extension file name (i.e. TXT, DAT, POS, etc.). Specify file name using the Windows standard interface procedure.

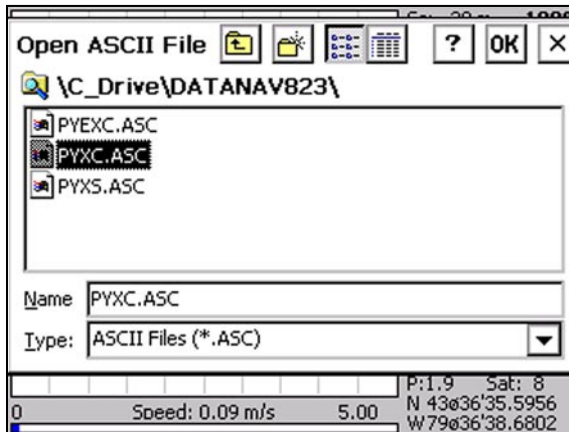


Figure 8.25: Open ASCII File dialog

After the file is selected the program will display dialog ASCII File Parameters (Figure 8.26). Numbers of column containing Longitude and Latitude, and type of delimiter (comma or space) have to be specified.

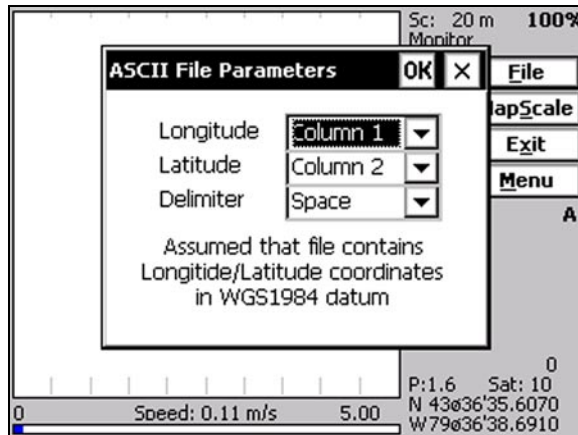


Figure 8.26: ASCII File Parameters dialog

After ASCII File parameters are specified a message with number of positions in the file will be displayed. At the same time depending on the available memory the program will provide a number of positions that will be displayed (Figure 8.27). ASCII files usually contain relatively small number of positions.

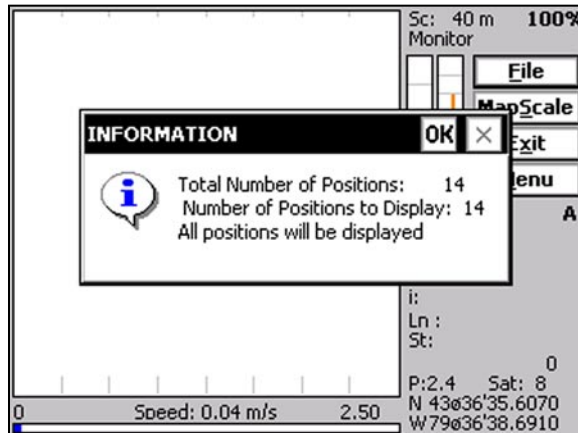


Figure 8.27: Number of Positions to be displayed

In rare cases when all positions can not be displayed at the same time, the program will plot every second, or third (and so on) GPS position, however the first and last stations recorded in the file will be always plotted. To display all points (contained in a large file) please divide file to two or more data sets.

After confirming above message by pressing any key the program starts to display positions recorded in the entered file. This operation can take several seconds depending on the file size and scale of the map area. Therefore message

labeled **WAIT** located at the right side of plot area will remain till all positions are displayed. In addition a beep will signal the end of plotting. Layout of GPS stations recorded in the entered data file is presented in Figure 8.28.

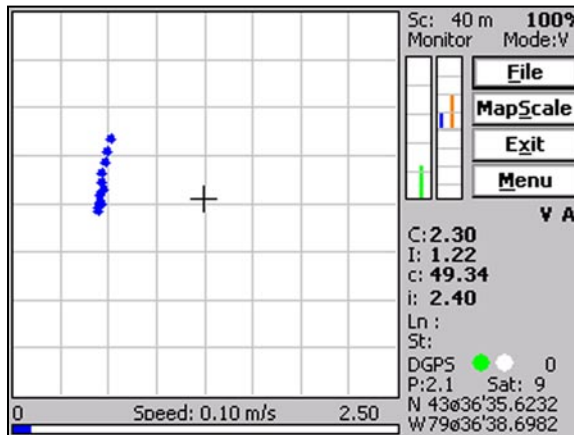


Figure 8.28: Layout of GPS positions from the ASCII file plotted at map scale 40 m

The cross mark indicating position of the system is still in the central position. Positions from external file are always related to the location of GPS when the program (its Logging portion) was started.

Since only one ASCII file or one External file can be entered the pop up menu will contain item Remove ASCII File (or Remove External file if external data file was loaded), see Figure 8.29. Tap this item (or use the arrow and ENTER key) to remove the external file from the display and from the program's memory. If the keyboard is used then the key **I** can act as a toggle to load and remove external data file.

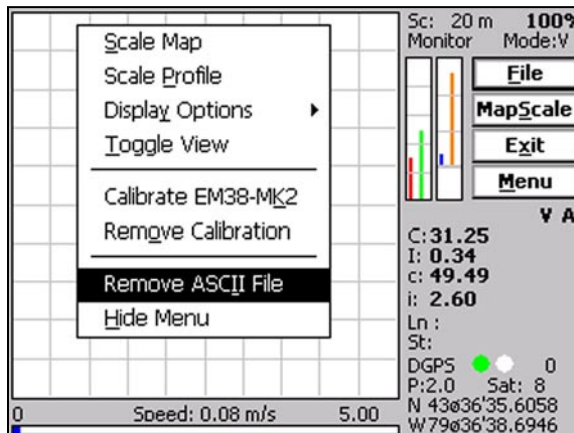


Figure 8.29: Remove ASCII File item

Exit (exit Monitor mode)
After tapping the **Exit** button (or executing this option using keyboard) the program immediately returns to Main Screen.

8.3 Stand By Mode

The main difference between the Monitoring and Stand By modes is that from the Stand By mode the program can be directly switched to Log mode to record the data in the file. The Allegro CX screen in Stand By mode in Navigation display mode is shown in Figure 8.30. The layout of the screen is almost identical to the layout described in section 8.1. Main differences are: label **Stand By**, reminding the operator about current mode, different command buttons and additional pop up menu options specific to this mode, and file name shown at parameter **F** (below moving bars).

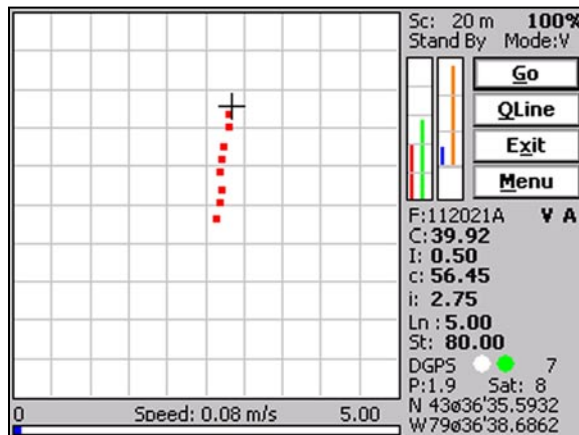


Figure 8.30: The NAV38MK2 screen in the Stand By mode and Navigation display mode

Example shown in Figure 8.30 presents situation where the operator started to walk in the N-E direction while logging data and then stopped logging data by switching from Log to Stand By mode. In the Stand By mode the cross mark which represents position of the operator (GPS antenna) will move if the operator will change his location, however points corresponding to GPS locations will not be plotted.

In case the program is run in the Profile display mode, data recorded previously in Log mode (up to last 198 stations before switching to Stand By mode) will be shown as profiles in the plotting area, as shown in Figure 8.31. Similarly to Navigation mode where GPS locations are not plotted on the screen, data plotted as profiles will not be updated.

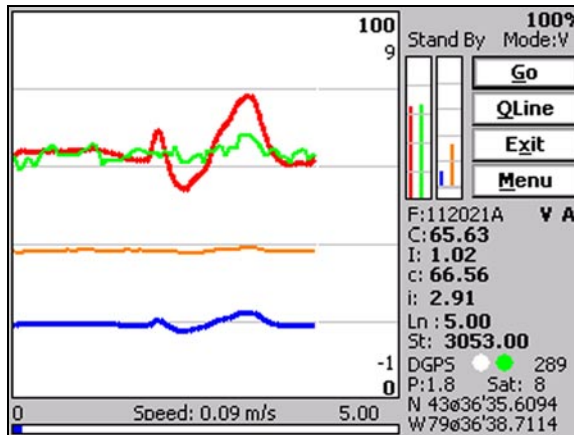


Figure 8.31: The NAV38MK2 screen in the Stand By mode and Profile display mode

The EM38-MK2 data displayed in the grid with moving bars and by numeric values will be displayed with the update rate approximately 10 readings per second, however data will not be saved in the log file in Stand By mode. If GPS input was enabled, GPS positions and parameters will be updated with a rate specified in GPS receiver. GPS data are not saved in file in Stand By mode as well.

Four command buttons available in Stand By mode include: **GO** (executed by tapping, or pressing key **G** or **ENTER** if the button is highlighted) which directs the program to Logging mode and recording EM38-MK2 and GPS data, **QLine** (Quick Line), **Exit**, and **Menu** (which contains more options than pop up menu in Monitoring mode). These options are described in detail in Section 8.5 (Field options available in Stand By mode).

8.4 Logging Mode

The Logging mode is enabled by tapping on the **GO** button or pressing the shortcut key **G** (or the **ENTER** key if the button **GO** is highlighted) in Stand By mode. After this button is executed the list of four buttons will be replaced by one "Pause" button, label Stand By will be replaced by label **Logging** (at the top of the display) and data will be logged in the mode corresponding to the selected EM38-MK2 mode in the Survey Setup menu. All labels and parameters (with the exception of buttons representing Stand By mode options) are the same as in Stand By mode and they are described in the preceding section 8.2. The NAV38MK2 screen in Logging mode and in Navigation display

mode is presented in Figure 8.32. The cross mark corresponding to the system location will move while the operator is progressing along the survey line and recorded GPS positions will be plotted as dots on the screen.

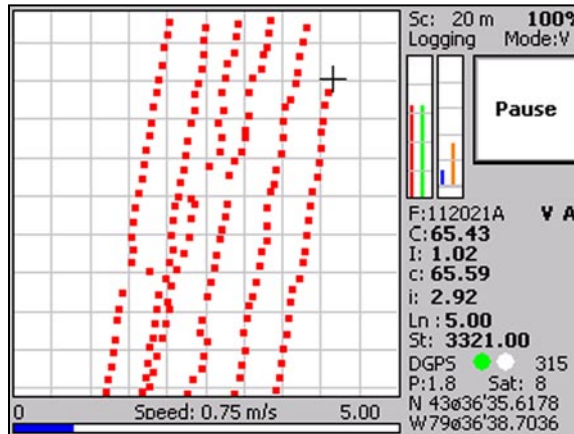


Figure 8.32: The NAV38MK2 screen in Logging mode (Navigation display mode)

If the program's display was toggled in Stand By mode to Profile display mode or if GPS was disabled in GPS Input menu the NAV38MK2 Profile display mode will be used as shown in Figure 8.33.

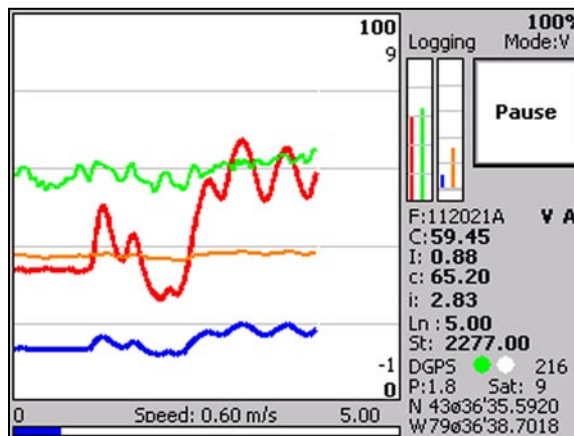


Figure 8.33: The NAV38MK2 screen in Logging mode (Profile display mode)

When the Profile display mode is enabled profiles (or profile) curves are updated after each reading is written to the data file. The program displays profiles for readings that were selected in the Profile Display Options window and at the same time they corre-

spond to selection in Survey Setup dialog (selected component). If the latter condition is not met readings will be saved in the data file and displayed in the grid with moving bars as well as in numeric form, however corresponding profile will not appear on the screen.

After the screen changes from Stand By to Logging mode the current station (label **St**) is updated according to the station interval. Similarly, if the GPS input was enabled, the total number of GPS positions in the data file is incremented every time (usually once a second) GPS position is written to the file (number of GPS records follows label **AGPS**, **DGPS**, or **RTK** and two small circle flashes green/white colour). Amplitude of graphic bars in grid area and digitally displayed readings for the instrument are updated after each reading is written to the data file. The audible click sounds at each reading if Audio option was selected in the Logger Setup dialog.

There is only one option available in the Logging mode - PAUSE logging. After the button labeled PAUSE is tapped or a Pause key selected in the Logger Setup dialog is pressed the recording is stopped and the Logging screen returns to the Stand By mode. In the Stand By mode the EM38-MK2 data will be displayed with the update rate approximately 10 readings per second, however data will not be saved in the log file, profile plots will not be updated (in Profile mode), audible click will stop if Sound option was enabled.

The cross mark corresponding to the system location will move according to the operator movement, however GPS positions will not be plotted as dots on the screen.

8.5 Field Options Available in Stand By Mode

Several options are available while the Logging window is in the Stand By mode. Four frequently used options can be accessed directly from command buttons and others can be used from pop up menu activated by button **Menu** (displayed in Figure 8.34). Command buttons can be used by tapping on the desired button, or from the keyboard by pressing one of the shortcut keys (underlined characters on button labels) or by navigating using **TAB** key (sets button as a default button - default button is highlighted) and pressing **ENTER** key.

Options listed in the menu can be accessed directly (without displaying pop up menu from the **Menu** button) by using keyboard shortcuts (underlined characters in menu items), i.e. pressing key **C** will display Enter Comment dialog. While the pop up menu is displayed options can be selected by clicking on the appropriate proper option, or from the keyboard by pressing the shortcut keys or by navigating using **Up** and **Down** arrow keys and then executing by the **ENTER** key.

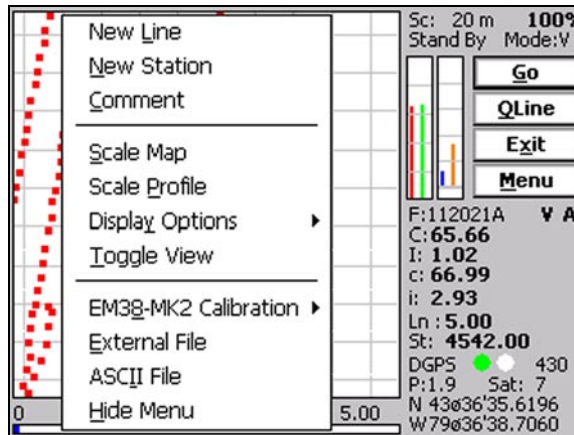


Figure 8.34: List of items in pop up menu in Stand By mode

GO (start data logging)

Tap on the **GO** button, or while using the keyboard press shortcut key **G** or if the button is a default button (highlighted) press **ENTER** key. The logging window in Stand By mode will change to Logging mode and logging data starts immediately.

QLine (Quick Line change)

Tap on the **QLine** button, or while using the keyboard press shortcut key **Q** or if the button is a default button (highlighted) press **ENTER** key. The confirmation message will be displayed, Figure 8.35.

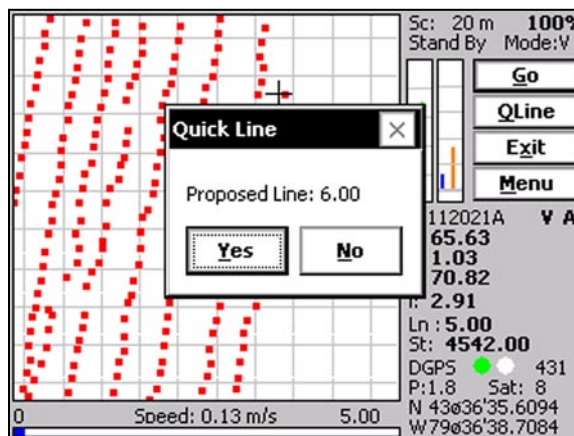


Figure 8.35: Quick Line confirmation message

This option allows the operator for fast and convenient change of the survey line, assuming that formerly specified parameters describing survey procedure can be accepted. In case of GPS based survey, this option provides very convenient and fast (two key strokes) procedure of dividing large data sets to several survey lines, without displaying the New Line dialog.

The name of the new line is given by the program based on the former line name and Line Increment (see Survey Setup dialog or the New Line option). Start station and Station Increment of the new survey line is calculated by the program based on the Sequence parameter and former line Start Station and Increment (see Survey Setup dialog or option New Line that follows).

To accept proposed Survey Line name tap on the **Yes** button or press **ENTER** key. If the button **No** is tapped then the program will continue survey along existing survey line.

New Line (New Survey Line)

The New Line dialog is displayed, Figure 8.36. Selecting this option allows the operator to enter a new survey line number (name) and (as opposite to Quick Line described above) to change associated line parameters (Line Increment, Line Sequence, Direction, Start Station, and Station Increment). The new line number and associated parameters are prompted by the program based on parameters specified in the Survey Setup menu and the last survey line.

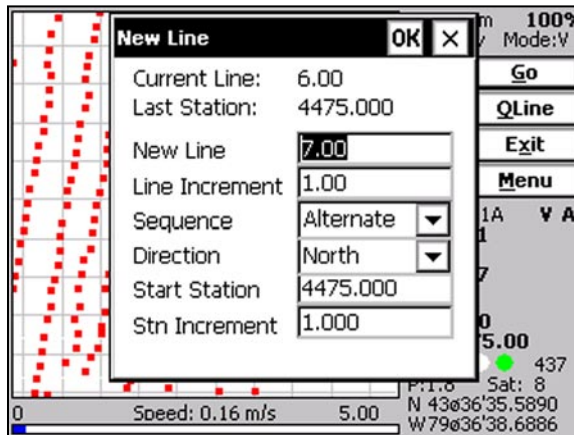


Figure 8.36: The New Line dialog

At the top of the dialog the last survey line name and the last logged station are displayed. Default name for the new line is given based on the Line Increment parameter. The default Start Station, direction of the Station Increment, and Direction are determined based on Sequence selection. All these parameters can be overwritten by the user as described in the Survey Setup dialog description (Chapter 3).

After all the parameters in the New Line dialog are updated tap the button **OK** or press **ENTER** key to accept the displayed settings. The program will return to the Logging window in Stand By mode. Survey line (**Ln:**) name and current station (**St:**) value will be updated and if the program is in Profile mode then profile curves plot for former survey line will disappear.

To return to Stand By mode and current survey line settings (state before this dialog was selected) tap **Cancel (X)** button or press **Esc** key, the dialog window will disappear.

New Station

Selecting this option allows the operator to enter a new station number (within the same survey line). The New Station dialog is displayed and it is shown in Figure 8.37. New station can be used in situation when an obstruction does not allow for continuation of the survey line. A new station can be entered and survey line can be continued. An alternative option in this case would be to use a new line with the same name and affix i.e. 11A, 11B, and so on.

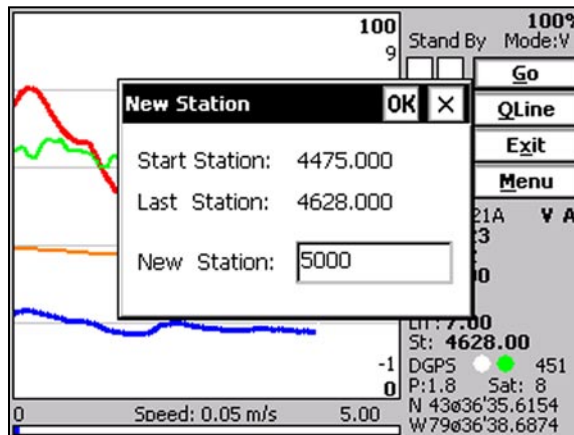


Figure 8.37: New Station dialog

Start and Current station are displayed at the top of the dialog. The New Station can be entered in the provided edit box labeled New Station.

Tap the button **OK** or press **ENTER** key to accept the new value. The program will return to the Logging window in Stand By mode. Current station (**St:**) value will be updated and after data logging is activated the profile curves (if the program is in Profile mode) will have a small gap (and possible amplitude discontinuity) showing the new station entry (see Figure 8.38).

This option does not provide any visual effect nor any benefit while the program is used in Mapping mode.

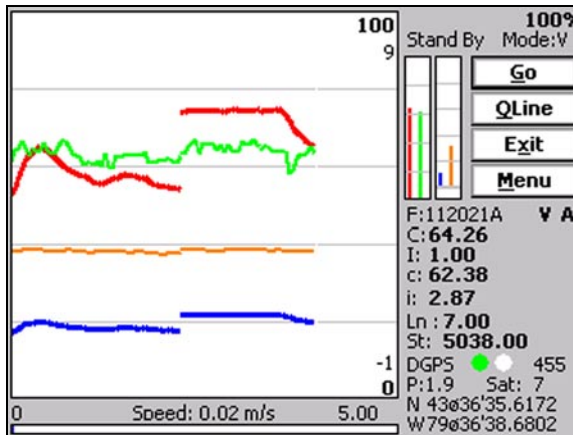


Figure 8.38: Profile display after New Station was entered

To return to Stand By mode and current survey line settings (state before this dialog was selected) tap **Cancel (X)** button or press **Esc** key, the dialog window will disappear and measurements can be continued.

Comment

The Comment option allows the operator to enter a comment at any point of the survey. A maximum of 11 characters can be entered as a comment. The Enter Comment dialog is displayed in Figure 8.39.

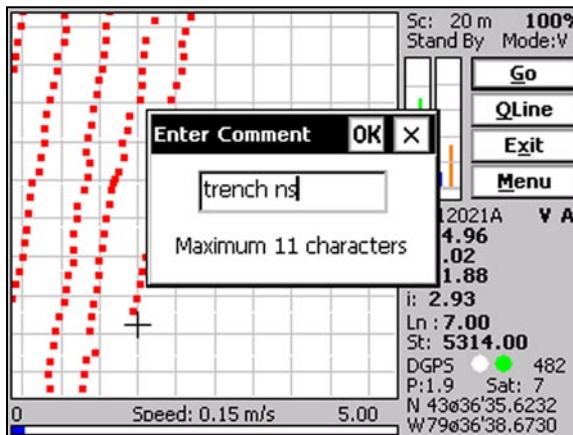


Figure 8.39: Enter Comment dialog

Tap the button **OK** or press **ENTER** key to accept the comment entered in a text box of the dialog. The text of the comment is saved in the file with a correspond-

ing time stamp and the program will return to the Logging window in Stand By mode.

To ignore an entry and return to Stand By mode tap **Cancel (X)** button or press **Esc** key, the dialog window will disappear and measurements can be continued.

Map Scale

This option is available by tapping on the command button labeled **Map Scale**, from pop up menu (accessible from **Menu** button), or directly from keyboard by using shortcut key **S**. The Enter Map Scale dialog will appear on the screen, Figure 8.40.

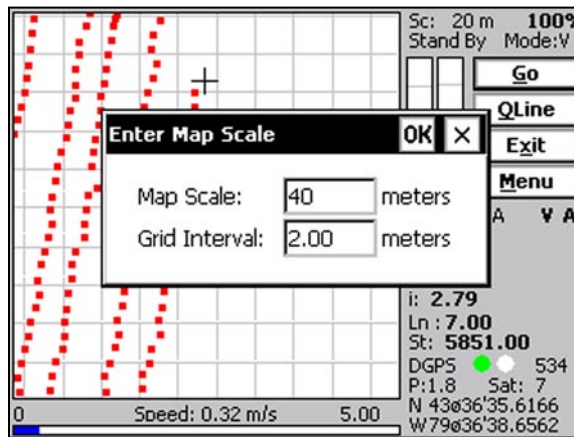


Figure 8.40: Enter Map Scale dialog

This dialog allows the operator to enter new scale for the map displayed by the plot area. Value is entered either in meters or feet according to selected units in Logger Setup dialog and it represents side of the square map. Only positive integer values ranging between 1 and 9999 are allowed by the program.

The second parameter in the Enter Map Scale is Grid Interval. These are grey grid lines in Navigation mode which may be helpful in estimation of distance on the map displayed in Navigation mode. Maximum number of grid lines is 20 in one direction, therefore minimum grid line interval is (Map Scale)/20, i.e. for the map scale 10 m the minimum grid interval is 0.5 meter. The program will recalculate grid interval in case too large scale will be entered.

Setting Grid Interval to zero will result in lack of any grid lines on the screen.

A data set at scale 40 m is shown in Figure 8.41. Compare the same data set presented at scale 20 m (before changing the map scale) in Figure 8.40.

After the file is specified tap the button **OK** or press **ENTER** key to accept and create data file. The program will switch Monitor mode to Stand By mode and the data file will be displayed on the screen.

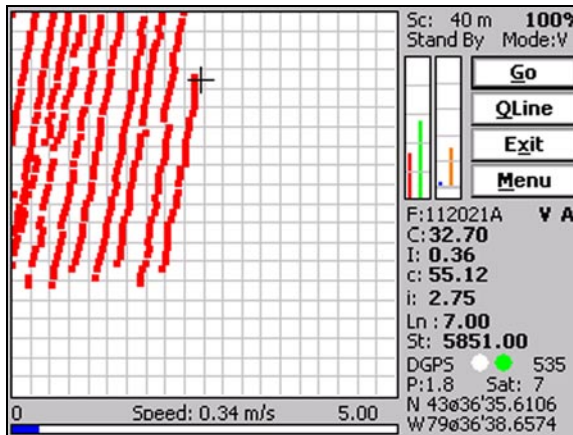


Figure 8.41: The NAV38MK2 screen in Navigation mode after change of map scale

To cancel selection and return to Monitoring mode tap the **Cancel (X)** button or press **Esc** key.

Profile Scale (conductivity and Inphase scale for profiles and moving bars)

This option is available from pop up menu (accessible by tapping the **Menu** button), or directly from keyboard by using shortcut key **P**. The Enter Profile/Bar Scale dialog will appear on the screen, Figure 8.42.

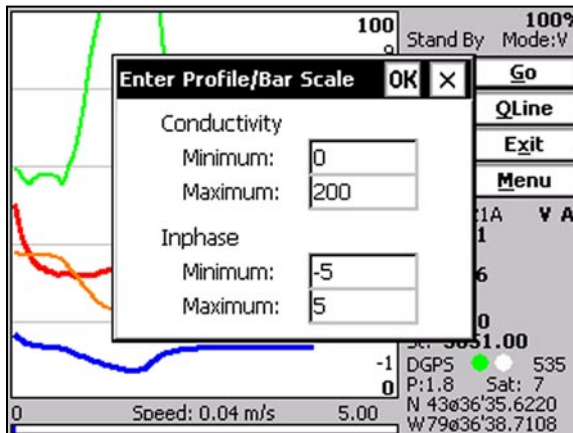


Figure 8.42: Enter Profile and Bar Scale dialog

This dialog specifies scale for profiles as well as for grids with moving bars. Minimum and maximum values can be specified for the plot range of each component (Conductivity and Inphase) in one of grid windows containing moving

bars as well as for the profile plot display if the Monitoring screen is in Profile display mode. Therefore range of displayed data is the same for the profile display area and for the grid area with vertical bars. However only profile plot area is labeled at its right side (Figure 8.43).

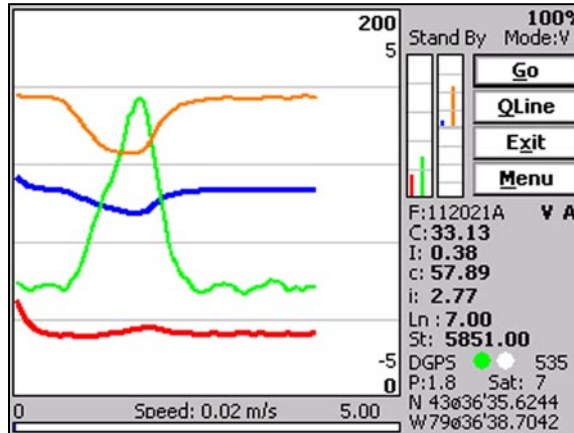


Figure 8.43: Profile display in new scale (compare with Figure 8.42)

After minimum and maximum values for each component are specified tap the button **OK** or press **ENTER** key to accept new values and the display will be redrawn (see Figure 8.43 with scale 0 to 500 mS/m and compare profiles shown in Figure 8.42, where scale 0 to 200 mS/m was used).

To cancel selection tap the **Cancel (X)** button or press **Esc** key.

Display Options (Map Options, Profile Options, Speed Bar, GPS Warning)

The Display Options item has four submenus. These are Map, Profile, Speed Bar, GPS Warning. Items Map and Profiles are identical to Map Display Options and Profile Display Options described in detail in Chapter 7. They can be accessed from pop up menu or directly by the keyboard pressing **A** or **R** keys.

Scale Speed Bar (adjust scale for speed bar)

The minimum value for the Speed Bar is preset to 0, therefore this scale requires only entry for the maximum speed. The Speed Bar Scale is given in Figure 8.44.

The entered scale applies only to graphic representation of the speed (graphic bar), speed in numeric form is always displayed above the bar, even if the real value exceeded maximum specified for the speed bar.

After the maximum value for the speed bar is specified tap the button **OK** or press **ENTER** key to accept new values and the display will be redrawn. To cancel selection tap the **Cancel (X)** button or press **Esc** key.

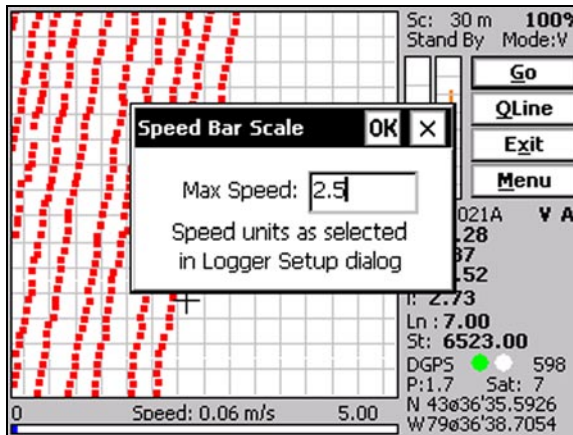


Figure 8.44: Speed Bar Scale dialog

GPS Warning (GPS Warning Mask)

This dialog allows to set or change GPS Warning Mask parameters during logging session. The same parameters can be set in GPS Port Setup dialog (see chapter 6). The GPS Warning Mask dialog is presented below in Figure 8.45, and description of parameters follows.

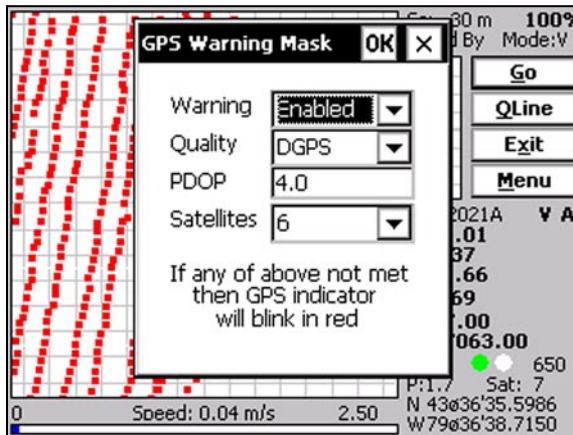


Figure 8.45: GPS Warning Mask dialog

Warning

Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by navigating with Tab key and then by using Up or Down arrow keys select one of the available items: Enabled and Disabled. This option allows you to Enable/Disable a GPS Warning Mask that

contains three parameters: Quality Indicator (degree of differential corrections), Dilution Parameter (PDOP or other label depending on the selected NMEA message), and number of available satellites.

When Enabled is chosen GPS two circle indicator will be alternating in green and white if conditions for specified parameters setting will be met. When any of the parameters is below set values then GPS indicators will alternate in red and white colours. In case Warning parameter is disabled then GPS indicator will be displayed in green and white colours regardless of GPS signal quality.

All GPS data is logged, GPS Warning Mask affects only display.

Quality

This parameter describes Quality Indicator (degree of differential corrections). Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by navigating with Tab key and then by using Up or Down arrow keys select one of the available items: AGPS (Raw), DGPS, RTK3, RTK4, and RTK5.

If Quality Indicator received from GPS receiver will be worse than specified then GPS indicator will alternate in red and white colours.

PDOP

This parameter can be labeled PDOP, HDOP, DOPG, DOP depending on the selected NMEA message. It can be also named Quality m (accuracy in meters) if LLQ was selected, or it is not available (labeled N/A) when messages GLL or Leica TPS are used.

Activate text box by tapping or using TAB key and then enter the chosen acceptable maximum value of Dilution parameter.

If PDOP (or other similar parameter) is larger than specified value then GPS indicator will alternate in red and white colours.

Satellites

Tapping on the down arrow next to the text box opens a drop-down box showing the available settings, or when the keyboard is used activate the text box by navigating with Tab key and then by using Up or Down arrow keys select one of the available items: 3 to 12.

If number of available satellites will be smaller than specified then GPS indicator will alternate in red and white colours.

After all the parameters in the GPS Warning Mask dialog are updated tap the button **OK** or press **ENTER** key to accept the displayed settings. Updated settings will be written to the initial file and they will be given as default param-

eters in the subsequent GPS Warning Mask and GPS Port Setup dialogs. To return to original settings (state before this dialog was selected) tap **Cancel** (X) button or press **Esc** key. All parameters will be reset to initial settings.

Toggle View (toggle between Navigation and Profile modes)

Selecting this item from pop up menu or simply pressing the key **T** will switch Monitoring or Stand By screens between Profile and Navigation modes. Changing the display from Profile to Navigation mode may take several seconds (depending on number of positions displayed and map scale). The program will display message **WAIT** till all positions are plotted in current map area and it will beep at the end of this process.

Calibrate EM38-MK2 (*automatic calibration of EM38-MK2*)

This option allows you to calibrate EM38-MK2 using automatic, software based method. The procedure is exactly the same as described earlier in section 8.2.

External File (External TrackMaker Data or GXY File entry)

This option allows to display GPS positions from formerly acquired data file. Files created with NAV38MK2, as well as data or GXY files created with any other Geomar data acquisition programs (i.e. NAV31, NAV38MK2, ML61, etc.) can be entered. This option is useful in cases where the operator wants to review the coverage of the surveyed area, to find the last station surveyed in a previous day, cover an area already surveyed with different Geonics instrument, or simply to increase density of stations in previously surveyed area.

After the item is selected from pop up menu or from the keyboard (by pressing the **E** key) the standard window dialog **Open File** is displayed (Figure 8.46). File

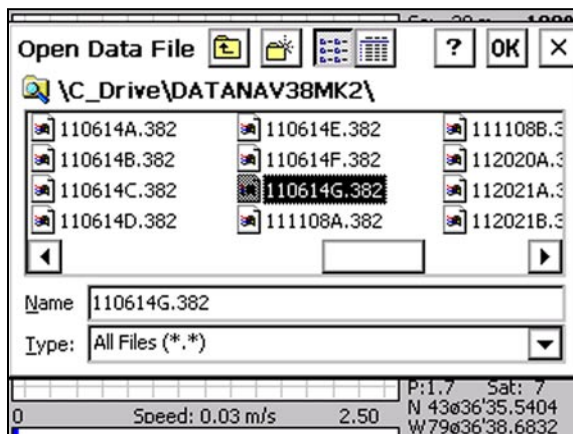


Figure 8.46: Open External File dialog

name must include extension file name (i.e. H31, N61, GXY, etc.). Specify file name using the Windows standard interface procedure.

After the file is selected a message with number of positions in the file will be displayed. At the same time depending on the available memory the program will provide a number of positions that will be displayed (Figure 8.47). If all positions can not be displayed, then the program will plot every second, or third (and so on) GPS position, however the first and last stations recorded in the file will be always plotted.

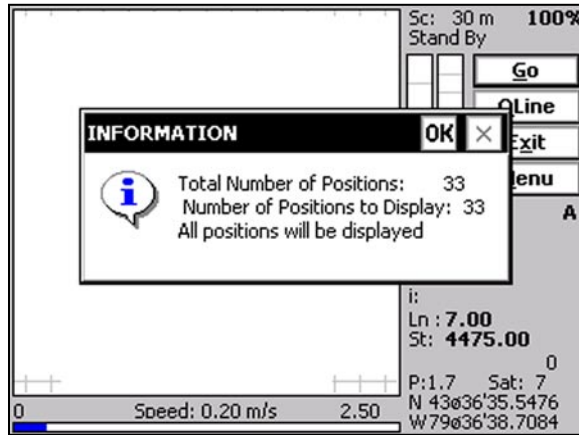


Figure 8.47: Number of Positions to be displayed

After confirming this message by tapping the button **OK** or pressing **ENTER** key the program starts to display positions recorded in the entered file. This operation can take several seconds depending on the file size and scale of the map area. Therefore message labeled **WAIT** located at the right side of plot area will remain till all positions are displayed. In addition a beep will signal the end of plotting. Layout of GPS stations recorded in the entered data file at scale 25 m is presented in Figure 8.48.

The size and colour of external file positions as well as current GPS positions are specified in Map Display Options (see Chapter 7). In the example in Figure 8.48 currently collected GPS points are represented by green larger dots while entered GPS positions from external file are plotted by red smaller dots. Since only one external file or one ASCII file can be entered the pop up menu will contain item Remove External File (or Remove ASCII file if ASCII file was loaded), Figure 8.49.

Tap the Remove External File item in pop up menu (or use the arrow and **ENTER** key) to remove the external file from the display and from the program's memory. If the keyboard (without displaying menu) is used then the key **E** can act as a toggle to load and remove external data file.

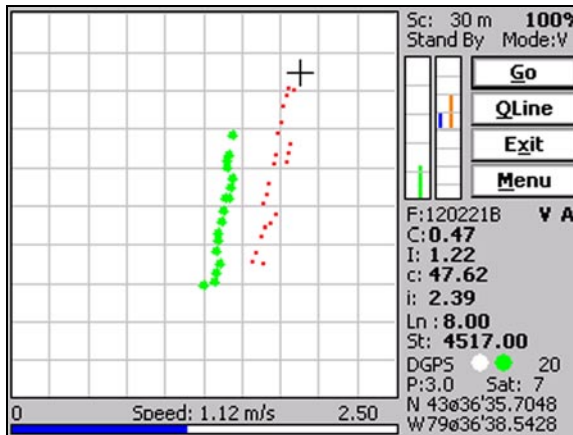


Figure 8.48: Layout of GPS positions from the external file (large green dots) and currently collected positions (small red dots) plotted at map scale 30 m

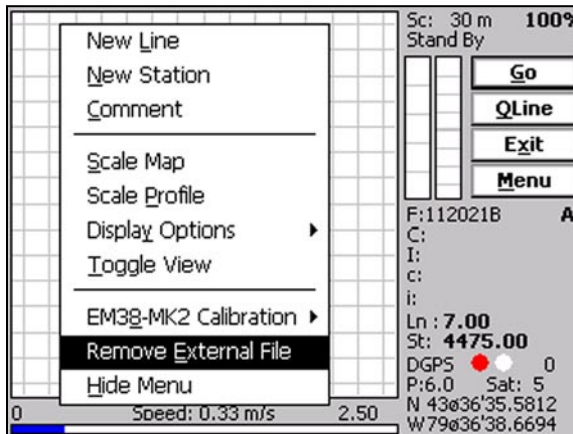


Figure 8.49: Pop up menu with Remove External File item

ASCII File (External data in ASCII text format)

This option of NAV38MK2 allows you to display GPS positions from processed data formatted in ASCII text files organized in comma or space delimited columns. Such files can contain positions of anomalies or targets located during interpretation. Positions can be exported while using Oasis or other mapping software. In Geosoft this type of files can be easily created by using Digitize function. The only condition is that positions should be saved (or converted) to

GPS native coordinate system - Geodetic coordinates (Latitude/Longitude) in WGS1984.

This option is useful in cases where the operator wants to locate previously located anomalies, navigate toward any features of known coordinates, or to increase density of stations in vicinity of previously detected targets.

After the pop up menu item ASCII File is tapped or executed from the keyboard (either by navigating with arrow keys or by pressing the I key) the standard Windows Open File dialog is displayed (Figure 8.50). File name must include extension file name (i.e. TXT, DAT, POS, etc.). Specify file name using the Windows standard interface procedure.

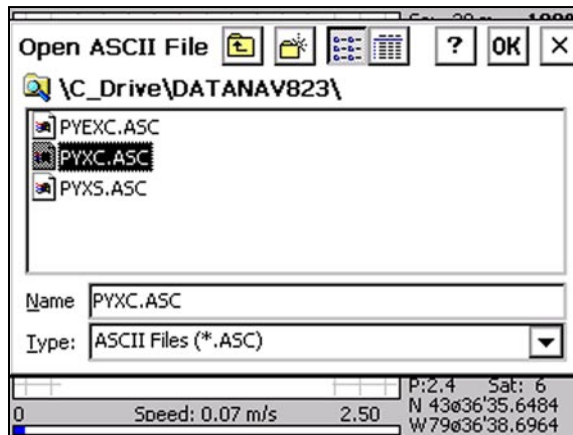


Figure 8.50: Open ASCII File dialog

After the ASCII file is selected the program will display dialog ASCII File Parameters (Figure 8.51). Numbers of column containing Longitude and Latitude,

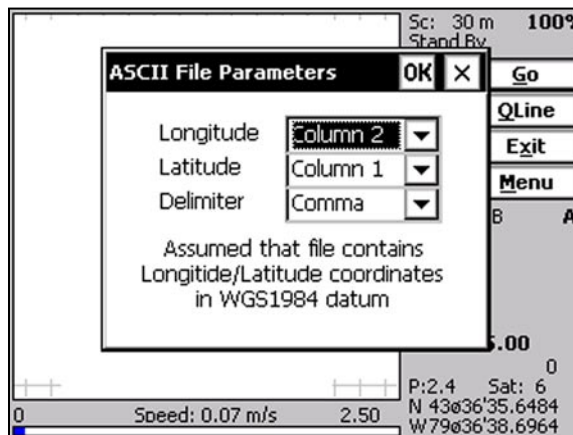


Figure 8.51: ASCII File Parameters dialog

and type of delimiter (comma or space) have to be specified. After ASCII File parameters are specified a message with number of positions in the file will be displayed. At the same time depending on the available memory the program will provide a number of positions that will be displayed (Figure 8.52). ASCII files usually contain relatively small number of positions.

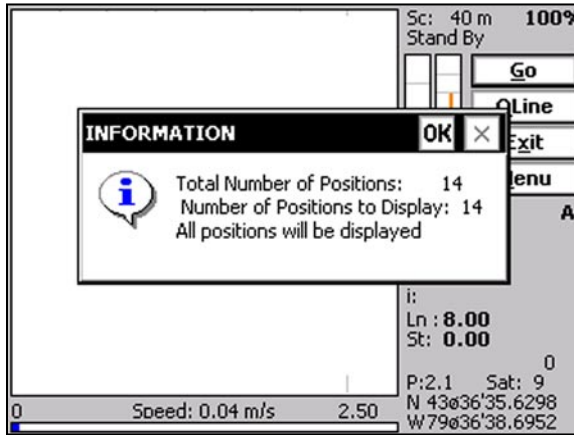


Figure 8.52: Number of Positions to be displayed

In rare cases when all positions can not be displayed at the same time, the program will plot every second, or third (and so on) GPS position, however the first and last stations recorded in the file will be always plotted. To display all points (contained in a large file) please divide file to two or more data sets.

After confirming above message by pressing any key the program starts to display positions recorded in the entered file. This operation can take several seconds depending on the file size and scale of the map area. Therefore message labeled **WAIT** located at the right side of plot area will remain till all positions are displayed. In addition a beep will signal the end of plotting. Layout of GPS stations recorded in the entered data file is presented in Figure 8.53.

The size and colour of ASCII file positions as well as current GPS positions are specified in Map Display Options (see Chapter 7). In the example in Figure 8.53 currently collected GPS points are represented by red and smaller dots while entered GPS positions from external file are plotted by blue and larger dots. Since only one ASCII file or one External file can be entered the pop up menu will contain item Remove ASCII File (or Remove External file if external data file was loaded), see Figure 8.54. Tap this item (or use the arrow and ENTER key) to remove the external file from the display and from the program's memory. If the keyboard is used then the key **I** can act as a toggle to load and remove external data file.

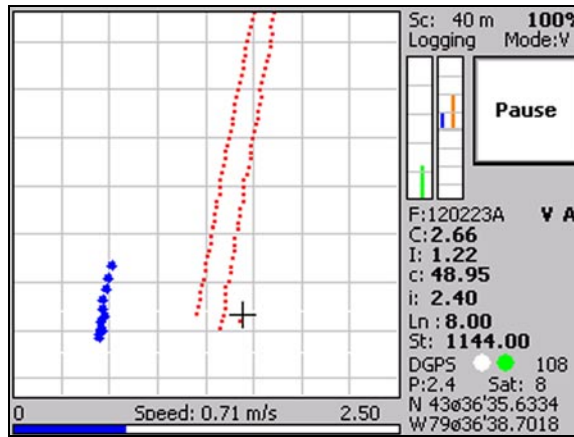


Figure 8.53: Layout of GPS positions from the ASCII file plotted at map scale 40 m

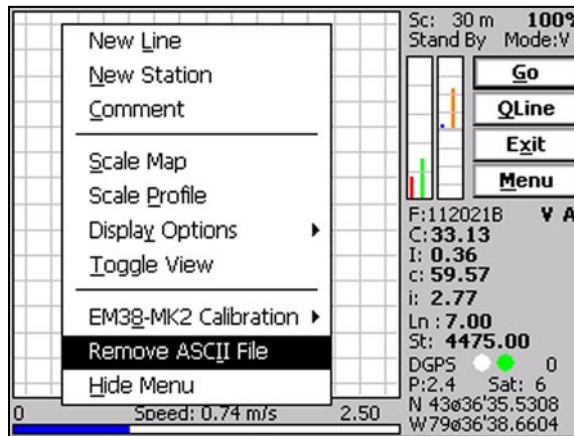


Figure 8.54: Remove ASCII file menu item

Exit

(exit data logging)

During data collection (in Stand By mode) a confirmation message will be displayed (there is no such message if **Exit** is performed in Monitoring mode) before program exits logging window, Figure 8.55.

After above message is confirmed the program stops logging, closes data file and returns to Main Screen. If the button No is tapped the program returns to current logging mode and data collection can be continued.

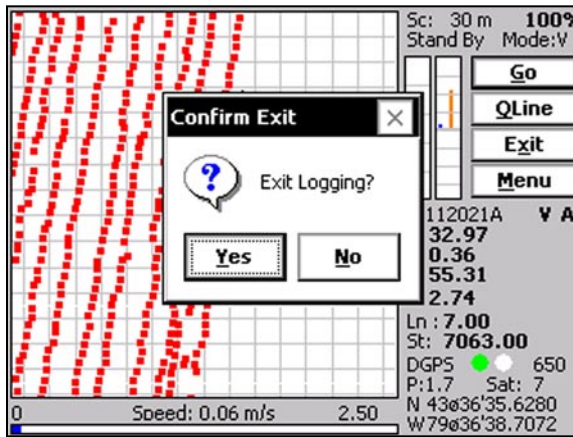


Figure 8.55: Exit Logging session confirmation

8.6 Message NO CONNECTION

If data is monitored or logged (in Monitoring, Stand By, or Log modes) a message **NO CONNECTION** (Figure 8.56) may appear in the centre of the screen when connection with the EM38-MK2 is lost. This message is preceded by four messages **PLEASE WAIT**.

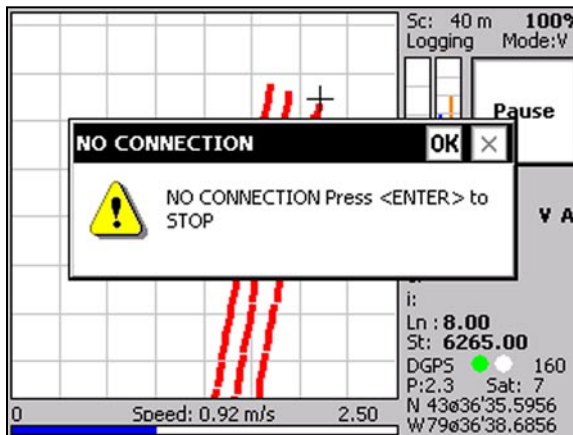


Figure 8.56: The NO CONNECTION message during Logging mode

This indicates lack of communication between the EM38-MK2 instrument and the field computer. In most cases the message **NO CONNECTION** is caused by disconnected con-

necter in the instrument cable, turning the instrument OFF or low battery in the EM38-MK2. The NAV38MK2 tries to establish communication while messages **PLEASE WAIT** are displayed. When message **NO CONNECTION** is displayed all open files are closed and after pressing any key the program ends. After correcting the source of a problem start the NAV38MK2.

The NAV38MK2 will be stopped when maximum number of GPS positions in the data file is reached and corresponding message will be displayed (Figure 8.57). There is no limit for EM38-MK2 data, however the maximum number of GPS stations in the file is 14400. Please try to limit you files to 1 hour worth of data. When number of GPS positions is large it takes longer for the processor to redraw screen, organize and sort coordinates in the internal data base, resulting in relatively slow screen redrawing.

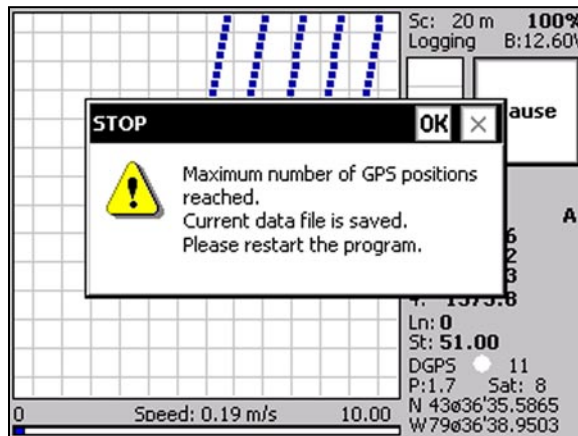


Figure 8.57: The NAV38MK2 message when maximum number of GPS positions in one data file has been reached

NAV38MK2 Data File



A.1 Description of NAV38MK2 Data File Format (382)

Each record created by the NAV38MK2 for Allegro CX program contains 27 characters, including line feed at the end of each record.

Header of the file contains 9 records starting with characters R, H, G, and then six records starting with O.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27		
N	A	V	3	8	2			W	1	3	4	Survey Type	UT	ID	IM	IC	ST								svid	10		
H																										svid	10	
																											svid	10
G																											svid	10
O	1																											10
O	2																											10
O	3																											10
O	4																											10
O	5																											10
O	6																											10

- NAV382 - identification of program file
- W134 - version number (V1.34), W indicates Allegro CX
- Survey Type - GPS (if GPS Input Enabled) or GRD (grid)
- UT - unit type (0 = meters, 1 = ft, 2 = US Survey ft)
- ID - EM38-MK2 Dipole Mode (selected by operator)
(0 = Vertical, 1 = Horizontal, 2 = Both)
- IM - EM38-MK2 survey mode
(0 = Auto, 2 = Manual)
- IC - not used parameter (=0 fixed, not used)

- ST - instrument type
(1 = EM38-MK2-1, 2 = EM38-MK2)
- svid - logger/software type id (not used)
- Data File Name - file name, maximum 8 characters
- Time/Samples - this field depends on EM38-MK2 survey mode
Auto Mode - Time Increment in seconds
Manual Mode - Samples/Reading
- TG - File tag (space=original, 1=Saved As / edited)
- GPS X Offset - Offset of GPS antenna in X direction
- GPS Y Offset - Offset of GPS antenna in Y direction
- GP - type of GPS NMEA message
(0 = GGA/GSA, 1 = GGA, 2 = POS, 3 = LLK,
4=LLQ, 5=GLL, 6 = GGK, 7 = Leica TPS,
8 = Trimble RTS)
- GS - GPS state (0=disabled, 1=Enabled, >1 indicates
averaging number for GXY files)
- GR - GPS update rate (= 0, fixed, not used)
- O1 - calibration factor conductivity 1.0 m (new, then old)
- O2 - calibration factor conductivity 0.5 m (new, then old)
- O3 - calibration factor Inphase Vert 1.0 m (new, then old)
- O4 - calibration factor Inphase Vert 0.5 m (new, then old)
- O5 - calibration factor Inphase Hor 1.0 m (new, then old)
- O6 - calibration factor Inphase Hor 0.5 m (new, then old)
- 10 - Line Feed character

Sequence of six records **O1** to **O6** can be repeated in data file whenever the EM38-MK2 Automatic Calibration is performed. Former Calibration factors are always placed in the same respective record, following a new factor value.

Header at the start of survey line (contains four records starting with L, B, A, and Z)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	
L	Line Name - 8 characters																								10		
B	Start Station (Format F11.2)																								10		
A	Dir							Station Increment (Format F11.3)																10			
Z	D	D	M	M	Y	Y	Y	Y			H	H	:	M	M	:	S	S	.	h	h						10

- Line Name - Line Name, maximum 8 characters
- Start Station - Start Station for the Line, format F11.2
- Dir - Direction of the Line (E, W, N, or S)
- Station Inc. - Station Increment, format F11.3
- Date - Date when Line was created, format DD-MM-YYYY
- Time - Time when Line was created, format HH:MM:SS.hh
- 10 - Line Feed character

Timer Reset

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	
*	Computer Time (Format HH:MM:SS.hh)																Time Stamp in ms (10 digits)										10

Indicates reset time of the program timer. This record links timer in milliseconds and computer time (local time) in format HH:MM:SS.hh. This record is written to the file each time after the program switches from the Stand By to Log mode. In case when data are taken continuously the timer is automatically reset every hour.

Reading

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
I	Gn	1h	1l	2h	2l	3h	3l	4h	4l	5h	5l	6h	6l											10		

I - indicator T, t, or 2

T - first reading at the EM38-MK2 station

t - first reading at the EM38-MK2-1 station, applies only to some models. Instrument type is described by parameter ST located in the first line of File Header.

2 - second reading at station (possible only in Manual mode)

Gn - information byte, one character parameter, the ASCII number of this character indicates following:

Bit	Decimal		Value and Meaning
7	128	0	<i>not used</i>
6	64	0	<i>not used</i>
5	32	0	<i>not used</i>
4	16	0	<i>not used</i>
3	8	0	<i>not used</i>
2	4	Mode	= 1 <i>Vertical</i> = 0 <i>Horizontal</i>
1	2	Marker	= 0 <i>Marker pressed</i> = 1 <i>otherwise</i>
0	1	0	<i>not used</i>

- 1h** - higher byte of the 2's complement Hex number of Channel 1
- 1l** - lower byte of Channel 1
- 2h** - higher byte of the 2's complement Hex number of Channel 2
- 2l** - lower byte of Channel 2
- 3h** - higher byte of the 2's complement Hex number of Channel 3
- 3l** - lower byte of Channel 3
- 4h** - higher byte of the 2's complement Hex number of Channel 4
- 4l** - lower byte of Channel 4
- 5h** - higher byte of the 2's complement Hex number of Channel 5
- 5l** - lower byte of Channel 5
- 6h** - higher byte of the 2's complement Hex number of Channel 6
- 6l** - lower byte of Channel 6
- Time** - time in ms from the Windows start (resets every 49.7 days).
The time in milliseconds can be linked with the computer local time by using Times in line started by * (see Timer Relation).
- 10** - Line Feed character

Channel Information

- Channel 1 - Conductivity for coil separation 0.5 m
- Channel 2 - Inphase for coil separation 0.5 m
- Channel 3 - Conductivity for coil separation 1.0 m
- Channel 4 - Inphase for coil separation 1.0 m
- Channel 5 - Temperature for coil separation 0.5 m
- Channel 6 - Temperature for coil separation 1.0 m

Multiply Channels 1 to 4 according to following formulas to obtain Conductivity or Inphase readings in mS/m or ppt.
(In EM38-MK2-1 data only channels 3, 4, and 6 are valid).

Channels 1 and 3

$$\text{Reading (Conductivity)} = (\text{Channel} \times 5 / 1024 - 160) \times 8$$

Channels 4

$$\text{Reading (Inphase 1.0 m)} = (\text{Channel} \times 5 / 1024 - 160) \times 8 \times 0.028819$$

Channels 2

$$\text{Reading (Inphase 0.5 m)} = (\text{Channel} \times 5 / 1024 - 160) \times 8 \times 0.00720475$$

Multiply Channels 5 and 6 according to the expression given below obtain Temperature readings in degrees.

$$\text{Temperature (for 1.0 or 5.0 m)} = \text{Channel} \times 100 / 13107 - 50$$

Comment

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
C	Comment (maximum 15 characters)															Time Stamp in ms (10 digits)										10

New Station

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27		
S	New Station (Format 11.2)																	Time Stamp in ms (10 digits)										10

Calibration

When Calibration is performed during data logging then record for each component/coil separation/dipole mode contains two factors. First value corresponds to the current calibration and the second, following value shows former calibration factor. Calibration values is always recorded as a block of six record (from **O1** to **O6**), each record represents values for different component/coil separation and in case of Inphase dipole mode settings.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
O	1	Calibration Q 1.0m (F10.3)										Calibration Q 1.0m (F10.3) - OLD					10									
O	2	Calibration Q 0.5m (F10.3)										Calibration Q 0.5m (F10.3) - OLD					10									
O	3	Calibration IV 1.0 m (F10.3)										Calibration IV 1.0 m (F10.3) - OLD					10									
O	4	Calibration IV 0.5 m (F10.3)										Calibration IV 0.5 m (F10.3) - OLD					10									
O	5	Calibration IH 1.0 m (F10.3)										Calibration IH 1.0 m (F10.3) - OLD					10									
O	6	Calibration IH 0.5 m (F10.3)										Calibration IH 0.5 m (F10.3) - OLD					10									

Records starting with X

Several informative records, for example X\$STARTED indicates start of Logging mode, X\$PAUSED indicates Pause (activated by Pause key stroke), etc.

GPS Data Message Records

Each GPS record (GGA or other NMEA message) is broken in to several 25 characters strings and placed in the NAV38MK2 data file which contains 27 characters records, including one character indicator and line feed at the end of each record. The GPS sequence starts at the line which contains the character @ as the first character, then records that contain a continuation of the same message start with the character #.

The GPS sequence ends with a line starting with the character !. The last line contains sequential number of GPS recorded position and a logger time stamp for the given GPS reading. A sample of the GPS message (GGA example) written in NAV38MK2 format is given below.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	
@	\$	G	P	G	G	A	,	h	h	m	m	s	s	.	s	s	,	d	d	m	m	.	m	m	m	10	
#	m	m	,	s	,	d	d	d	m	m	.	m	m	m	m	m	,	s	,	n	,	q	q	,	p	10	
#	p	.	p	,	s	a	a	a	a	a	.	a	a	,	u	,	±	x	x	x	x	.	x	,	M	10	
#	,	s	s	s	,	a	a	a	*	c	c	CR	LF													10	
!	0	0	4	3	5																					Time Stamp in ms (10 digits)	10

The GPS sequence may contain 4 to 7 records. The components of the GGA message may differ in length, however they are placed in the same number of columns. Refer to Appendix B (section B.2) for the definition of each component of the GGA data message. Other available GPS messages in NMEA format, GSA, POS, LLK, LLQ, GLL, and GGK, are recorded similarly. The structure of these NMEA sentences is given in section B.2 of Appendix B.

If the Checksum in NMEA message is invalid then starting character @ is replaced by ?, and # is replaced by " (ASCII character code 34). The starting character of Time Stamp record ! remains the same.

A.2 Example of NAV38MK2 Data File

The NAV38MK2 data file records are written in binary format, therefore characters may have a different shape when displayed or printed, depending on particular video or printer settings.

```

NAV382 W103GPS00002 103
H 031722B 0.050 01B
G 0.00 0.00 010 EE
01 -252.532 0.000
02 254.599 0.000
03 430.557 0.000
04 1276.376 0.000
05 587.093 0.000
06 736.105 0.000
LO
B 0.00
AN 1.000
Z17032008 22:08:55
*22:08:55.000 1431197131
X$STARTED 1431198282
T E$u»°Y|T ù Ø 1431198324
T E ùC°9|U U Ø 1431198372
T E ùa°;|S U Ø 1431198420
T E @ùx°j|U Ø 1431198467
@SGPGGA,0453T1.00,4336.593
#59,N,07936.64523,W,2,7,1,
#143.58,M,-35,M,4,119*52
!000001p 1431198419
T E2ùñ°k|c ù Ø 1431198547
@SGPGSA,A,3,,27,16,,23,,1
#9,13,06,03,,02.2,01.1,01.
#9*06
!000001 1431198548
T E!ùà°q|q ù Ø 1431198567
T E%ùU°z|X U Ø 1431198609
T E ùè°a|\ U Ø 1431198657
T E ù°N|\ U Ø 1431198704
T E&ù°|Z U Ø 1431198752
T E?ù°m|N U Ø 1431198799
T E-ùó°|D U Ø 1431198847
T E4ùý°i|@ U Ø 1431198894
T E,ù°R|7 U Ø 1431198941
T E ù°^|> U Ø 1431198989
T E7ù°M|6 U Ø 1431199037
T E@ùp°v|7 U Ø 1431199084
T E1ùp°|Q U Ø 1431199131
T E4ù>°3|W U Ø 1431199179
T EKù°|P O U Ø 1431199226
T E2ù°p|M U Ø 1431199274
T E$ù°=|b W U Ø 1431199321
T E3ù@°|f O U Ø 1431199369
T EJù°u|K Ø x 1431199416
T EJù7°u|V Ø x 1431199464
@SGPGGA,0453T2.00,4336.594
#12,N,07936.64511,W,2,7,1,
#143.60,M,-35,M,5,119*59
!000002p 1431199446
T Eeù°f|V Ø x 1431199551
@SGPGSA,A,3,,27,16,,23,,1
#9,13,06,03,,02.2,01.1,01.
#9*06
!000002 1431199551
T Eàu:°d|U Ø x 1431199569
T EKùñ°j|S Ø x 1431199606
.....

```

A.3 Format of GXY Data File

The NAV38MK2 data file with extension GXY contains GPS records. The structure of this file is identical to the standard NAV38MK2 (382) file. The difference is that it does not contain any EM38-MK2 records. This file is created by NAV38MK2 when the EM38-MK2 option is Disabled in the System Setup menu. In this case the program acts as a GPS logging program.

It should be noted that any NAV38MK2 data file, as well as GXY and data files created by other Geomar data acquisition programs (RTmap31, NAV31, NAV61, ML61, ML31, etc.) can be used as an GXY file in the data processing programs TrackMaker and RTM for any other supported Geonics instrument (RTM31, TrackMaker31, TrackMaker61MK2, etc.). The extension name GXY indicates that the file does not contain electromagnetic data.

NAV38MK2 and GPS Input

B

B.1 Using the NAV38MK2 with a GPS System

The NAV38MK2 program accepts input from GPS systems that stream NMEA-0183 compatible data. through their output port. The program can use the following NMEA messages: pair GGA and GSA, GGA, POS, GLL, LLK, LLQ. and GGK. In addition to GPS NMEA statements NAV38MK2 provides also interface to Leica Robotics Total Station TPS1100 and TPS1200, and Trimble RTS for areas were GPS signal is not accessible. To use Leica Robotics device select option "Leica TPS" in NMEA Data of the GPS Port Setup menu, and when Trimble RTS is employed select item "Trimble RTS". The program writes entire message (that was selected in GPS Input menu) to the NAV38MK2 data file. If the pair GGA/GSA is selected, both GGA and GSA messages are written to the NAV38MK2 data file. The GSA message is used to display index PDOP (Position Dilution of Precision) on the logger screen and to determine quality of GPS position while processing data in the program TrackMaker38MK2.

The GPS system means (control device, receiver panel, or manufacturer software) must be used to set GPS receiver communication parameters, to specify frequency of GPS output, and number and type of NMEA messages sent by the GPS system output port. Any GPS system can send various NMEA messages. **It is important to select only messages (GGA, POS, GLL, LLK, LLQ, GGK, or GGA and GSA) that are actually used by NAV38MK2.** The program will accept any GPS string sent by the GPS receiver, however it uses time to process GPS data that is not being used. Therefore, selecting a larger number of NMEA messages for GPS output will result in slower data acquisition of data. Normally, the NAV38MK2 running in Allegro CX logger uses less than 100 ms to process and record GPS data from the two NMEA messages, GGA and GSA.

If the particular GPS receiver is capable of sending data more than once a second, the program limits its real time output frequency to a maximum 1 Hz or 2 Hz (user selectable). At higher frequency of GPS data the program would be occupied by GPS activity and would not record all required EM38-MK2 data. The restriction of 1 or 2 Hz applies only to the Allegro display update rate in real time. When a GPS receiver streams more than 1 or 2 positions per second **all** GPS positions are saved in the data file and will be used by data processing program TrackMaker38MK2.

To achieve higher speed of data acquisition it is also recommended to use single NMEA

message (i.e. POS, LLK, GGK, or just GGA). In addition, if it is possible set faster Baud Rate for GPS, i.e. 19200 or 38400 instead of default value of 9600.

If the pair GGA/GSA is selected, only message GGA is necessary to position EM38-MK2 data. If message GSA is not available in a particular system, the NAV38MK2 will function and record position data based on GGA message. Lack of GSA message will result in PDOP index displayed as Not Available (N/A) on the logger display. In this case it is better to select the message GGA which will provide display of index HDOP (Horizontal Position Dilution of Precision).

The NAV38MK2 displays several parameters related to GPS status. A label **DGPS** (Differential Global Positioning System) in the program indicates that GPS readings are differentially corrected in real time. Label **AGPS** (Autonomous Global Positioning System) in NAV61 indicates lack of differential correction. There are three more labels **RTK3**, **RTK4**, and **RTK5** (RTK - Real Time Kinematic) and they correspond to GPS Quality Indicator 3, 4, and 5. Correction AGPS corresponds to Quality Indicator 1, and DGPS represents Quality Indicator 2. Corrections described by RTK1 to RTK5 correspond to Quality Indicator 3, 4, and 5 (they have often different names for different brands of GPS receivers). See next section B.2 and GPS receiver documentation for detailed description and availability of this parameter.

On the right side of labels **DGPS**, **AGPS**, or **RTK** a small circle is displayed. This circle should change colour between green and white with the frequency of GPS update rate (usually 1 second intervals). If the circle has one colour for a long period of time it means that the GPS system is not working or that it is not connected to the field computer. The number of recorded GPS positions are displayed on the right side of the small green/white circle. This number is updated only in logging mode, when the data are recorded (in Stand By mode or during Monitoring the moving square, updated GPS positions, index PDOP, and number of tracked satellites, indicate presence of GPS input).

Two more GPS parameters are displayed on the logger screen. These are index PDOP shown by label **P** (or **PDOP**) and number of tracked satellites represented by label **S**. The index called PDOP (Position Dilution of Precision) measures the strength of satellite coverage for a given area. PDOP is affected by the number of satellites visible and their relative positions in the sky. The smaller the number of PDOP the stronger the satellite coverage is. When there are more than 5 satellites widely spaced visible, the PDOP is 4 or less. However, when there are less satellites visible, or they are unevenly spaced in the sky, PDOP values can be 6 or higher. In most cases, the PDOP in open sky is less than 3, and most accuracies given for many GPS systems are given for this norm. The index called HDOP is related only to horizontal position fix. It is used when message GGA was selected. If a message GGL was selected the index PDOP nor HDOP are not available.

Refer to GPS documentation and literature for more information related to error sources of GPS positioning.

B.2 Description of Selected NMEA Data Messages

GGA Data Message

The GGA message contains the GPS position information and it is the most widely used NMEA data message. This message takes the following form:

```
$GPGGA,hhmmss.ss,ddmm.mmmmm,s,dddmm.mmmmm,s,n,qq,pp.p,saaaa.aa,u,  
±xxxx.x,M,sss,aaaa*cc<CR><LF>
```

Definition of GGA message component:

hhmmss.ss	UTC time in hours, minutes, seconds of the GPS position
ddmm.mmmmm	Latitude in degrees, minutes, and decimal minutes
s	s=N or s=S, for North and South latitude
dddmm.mmmmm	Longitude in degrees, minutes, and decimal minutes
s	s=E or s=W, for East and West longitude
n	Quality indicator, 0 = no position, 1 = raw, no differentially corrected position, 2 = differentially corrected position, 9 = position computed using almanac information
qq	Number of satellites used in position computation
pp.p	HDOP = 0.0 to 99.9
saaaa.aa	Antenna altitude
u	Altitude units, M=meters
±xxxx.x	Geoidal separation (requires geoidal height option)
M	Geoidal separation units, M = meters
sss	Age of differential corrections in seconds
aaaa	Base station identification
*cc	Checksum
<CR><LF>	Carriage return and Line feed

GSA Data Message

The GSA message contains active satellites and PDOP value. The GSA message is given in the following form:

\$GPGSA,c1,d1,d2,d3,d4,d5,d6,d7,d8,d9,d10,d11,d12,d13,f1,f2,f3*cc<CR><LF>

Definition of GSA message components:

c1	Mode, M = manual, A = automatic
d1	Mode, 2 = 2D, 3 = 3D
d2-d13	Satellites used in position computation (range 0 to 32)
f1	PDOP (range 0 to 99.9)
f2	HDOP (range 0 to 99.9)
f3	VDOP (range 0 to 99.9)
*cc	Checksum
<CR><LF>	Carriage return and Line Feed

POS Data Message

The POS message contains the GPS position information and PDOP value. The POS message is given in the following form:

\$PASHR,POS,n,qq,hhmmss:ss,ddmm.mmmmm,s,dddmm.mmmmm,s,saaaa.aa,seeeee,ttt,ggg,svvv,pp,hh,vv,tt,vvvv*cc<CR><LF>

Definition of POS message components:

n	Quality indicator, 0 = no differentially corrected position, 1 = differentially corrected position
qq	Number of satellites used in position computation
hhmmss:ss	UTC time in hours, minutes, seconds of the GPS position
ddmm.mmmmm	Latitude in degrees, minutes, and decimal minutes
s	s=N or s=S, for North and South latitude
dddmm.mmmmm	Longitude in degrees, minutes, and decimal minutes
s	s=E or s=W, for East and West longitude
saaaa.aa	sensor computed altitude
seeeee	reserved

ttt	True track/true course over ground in degree
ggg	Speed over ground (knots)
svvv	Vertical velocity (decimeters per second)
pp	PDOP - position dilution of precision (00 to 99)
hh	HDOP - horizontal dilution of precision (00 to 99)
vv	VDOP - vertical dilution of precision (00 to 99)
tt	TDOP - time dilution of precision (00 to 99)
vvvv	firmware version ID
*cc	Checksum
<CR><LF>	Carriage return and Line feed

LLK Data Message

The LLK (Leica Local Position and GDOP) message provides position in local coordinates in meters and GDOP value. The LLK message is given in the following form:

**\$GPRLLK,hhmmss.ss,ddmmyy,xxxx.xxxx,M,xxxx.xxxx,M,x,x,xx.xx,xxxx.xxxx,M,
*cc<CR><LF>**

Definition of LLK message components:

hhmmss.ss	UTC time in hours, minutes, seconds of the GPS position
ddmmyy	UTC date (day, month, year)
xxxx.xxxx	Grid Easting, meters
M	Meters (fixed text "M")
xxxx.xxxx	Grid Northing, meters
M	Meters (fixed text "M")
x	Quality indicator, 0 = not valid, 1 = GPS Nav Fix (no differentially corrected position), 2 = DGPS Fix (differentially corrected position), 3 = RTK Fix
x	Number of satellites used in computation,
xx.xx	GDOP
xxxx.xxxx	Height, meters
M	Meters (fixed text "M")
*cc	Checksum
<CR><LF>	Carriage return and Line feed

LLQ Data Message

The LLQ (Leica Local Position and Quality) message provides position in local coordinates in meters and position quality in meters. The LLQ message is given in the following form:

\$GPLLQ,hhmmss.ss,ddmmyy,xxxx.xxxx,M,xxxx.xxxx,M,x,x,xx.xx,xxxx.xxxx,M,*cc<CR><LF>

Definition of LLQ message components:

hhmmss.ss	UTC time in hours, minutes, seconds of the GPS position
ddmmyy	UTC date (day, month, year)
xxxx.xxxx	Grid Easting, meters
M	Meters (fixed text "M")
xxxx.xxxx	Grid Northing, meters
M	Meters (fixed text "M")
x	Quality indicator, 0 = not valid, 1 = GPS Nav Fix (no differentially corrected position), 2 = DGPS Fix (differentially corrected position), 3 = RTK Fix
x	Number of satellites used in computation,
xx.xx	Position quality, meters
xxxx.xxxx	Height, meters
M	Meters (fixed text "M")
*cc	Checksum
<CR><LF>	Carriage return and Line feed

GLL Data Message

The GLL message takes the following form:

\$GPGLL,ddmm.mmmmm,s,dddmm.mmmmm,s,hhmmss.ss,s*cc<CR><LF>

Definition of GLL message component:

dddmm.mmmmm	Latitude in degrees, minutes, and decimal minutes
s	s=N or s=S, for North and South latitude

dddmm.mmmmm	Longitude in degrees, minutes, and decimal minutes
s	s=E or s=W, for East and West longitude
hhmmss.ss	UTC time in hours, minutes, seconds of the GPS position
s	Status, A = valid, V = invalid
*cc	Checksum
<CR><LF>	Carriage return and Line feed

GGK Data Message

The GGK message contains the GPS position, Time, Date, Position Type, and DOP information. The GGK shown below is not a standard NMEA data message and it is used in several Trimble GPS receivers. If this message is used as a standard NMEA statement by a given GPS receiver it starts with \$GPGGK and contains GDOP instead of DOP.

TrackMaker software automatically recognizes which type of GGK message is used.

The Trimble proprietary type of GGK message takes the following form:

\$PTNL,GGK,hhmmss.ss,ddmmyy,ddmm.mmmmmmmmm,s,dddmm.mmmmmmmmm,s,n,qq,p,p,EHT-aa.aaa,M*cc<CR><LF>

Definition of GGK message component:

hhmmss.ss	UTC time in hours, minutes, seconds of the GPS position
ddmmyy	Date
ddmm.mmmmmmmmm	Latitude in degrees, minutes, and decimal minutes
s	s=N or s=S, for North and South latitude
dddmm.mmmmmmmmm	Longitude in degrees, minutes, and decimal minutes
s	s=E or s=W, for East and West longitude
n	GPS Quality indicator, 0 = fix not valid or not available, 1 = Autonomous GPS fix, no differentially corrected position, 2 = differential, floating carrier phase integer based solution (FLOAT), 3 = differential, fixed carrier phase integer-based solution (FIXED), 4 = differential, code phase only solution (DGPS)
qq	Number of satellites used in fix
p.p	DOP of fix

EHT-aa.aaa	Ellipsoidal height of fix
M	unit of measure for ellipsoidal height in meters
*cc	Checksum
<CR><LF>	Carriage return and Line feed

B.3 Configuring Trimble GPS Pathfinder ProXRS System

The data output in the Trimble Pathfinder ProXRS receiver can be configured in Asset Surveyor software in Trimble field computer (TSC1, TDC1, or TDC2). The Asset Surveyor Operation Manual provides details of the NMEA output format.

While running Asset Surveyor software select NMEA/TSIP output options from the Communication options menu. In the NMEA/TSIP output options form for Output select **NMEA**. After the NMEA option is selected Asset Surveyor extends the NMEA/TSIP form. Select Baud Rate: **9600** and Output interval: **1s** (or larger if required). Below these parameters a list of available NMEA-0183 messages will be displayed. Enable only required messages: GGA and GSA, or only GGA.

After you save the contents of the NMEA/TSIP output options form with the Output parameter set to **NMEA**, the Pathfinder GPS receiver begins to stream selected NMEA-0183 messages at the specified Output interval.